

ArcSource Outdoor 4MC tm



Client: _____

Project: _____





Specifier: _____

Type: _____ Qty: _____



FEATURES:

- Input Voltage: 48v Dc Via ArcPower Range
- Power consumption: 6w @ 350mA
10W @ 700mA
- Light Source: 1 x MC LED
- Delivered Lumen: 364 - (700mA 11dg)
- Projected LED Life: 50,000 Hrs
- Control: DMX Controller
- Housing: Cast Aluminium and Glass Cover
- Fixing Method: Mounting Plate + Land spike
- IP Rating: IP67
- Operating Ambient Temp: -20°C/+45°C (-4°F/+113°F)
- Certification: ETL / cETL, CE, RoHS
- 5 Year Warranty

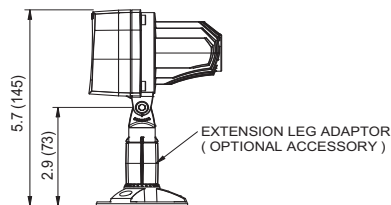


How To Order							
	GROUP	VARIANT	SIZE	COLOUR	OPTIC	FINISH	OPTIONS
ARC	1	2	3	4	5	6	7
	SCE	OUT	4	RGBW - Red, Green, Blue, White RGBA - Red, Green, Blue, Amber SW - Smart White PW - Pure White	11° 26° 36°	S - Silver B - Black W - White C - Custom	CUS - Custom MTP - Multiple CCL - Custom Cable Length
Example	ARCSOURCE OUTDOOR 4MC RGBW 11 BLACK						
ARC	SCE	OUT	4	RGBW	11	B	

Colour temperature to be specified at time of order


ROBE lighting s.r.o., Palackého 416 757 01 Valasské Meziříčí, Czech Republic. Tel: +420 571 751 500 - Fax: +420 571 751 515 - E-mail: info@anolis.eu
 UK: Anolis UK, 3 Spinney View, Stone Circle Road, Round Spinney Ind Est, NN3 8RF, Northampton, United Kingdom. Tel: +44 1604 741000 - Fax: +44 1604 741041 - E-mail: info@anolis.co.uk
 USA: Anolis Lighting, 12349 SW 53rd Street, Suite 202, Cooper City, Florida 33330, U.S.A. Tel: +1 844 426 6547 - +1-844-4 ANOLIS - Fax: (954) 680-1910 - E-mail: info@anolislighting.com
 AUS: Anolis Australia, 28 Expo Court, Ashmore, 4215, Queensland, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E-mail: info@anolis.com.au
 AUS: Anolis Australia, 5 Phillip Court, Port Melbourne, 3207, Victoria, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E-mail: info@anolis.com.au
 Asia and Pacific: Anolis Asia and Pacific, 12 New Ind Road, #02-05 Morningstar Centre, S-536202, Singapore. Tel: +65 6280 8558 - Fax: +65 6280 2896 - E-mail: asiapacific@anolis.eu
 Middle East: Anolis Middle East, Office Nbr 507 5th Floor, Al Asmawi Building DIP 1, Dubai, UAE. Po Box: 391 898 - Tel: +971 4 885 3223 - E-mail: middleeast@anolis.eu
 Russia and CIS: Taganskaya str. 26-1-72, 109004 Moscow, Russia. Tel: +7 495 504 9569 - E-mail: russia@anolis.eu
 Central and South America: Galicia 1198 ap 303, 1100, Montevideo, Uruguay. Tel: +5982 900 67 47 - E-mail: Latam@anolis.eu

www.anolis.eu | www.anolislighting.com


Connection Scheme:

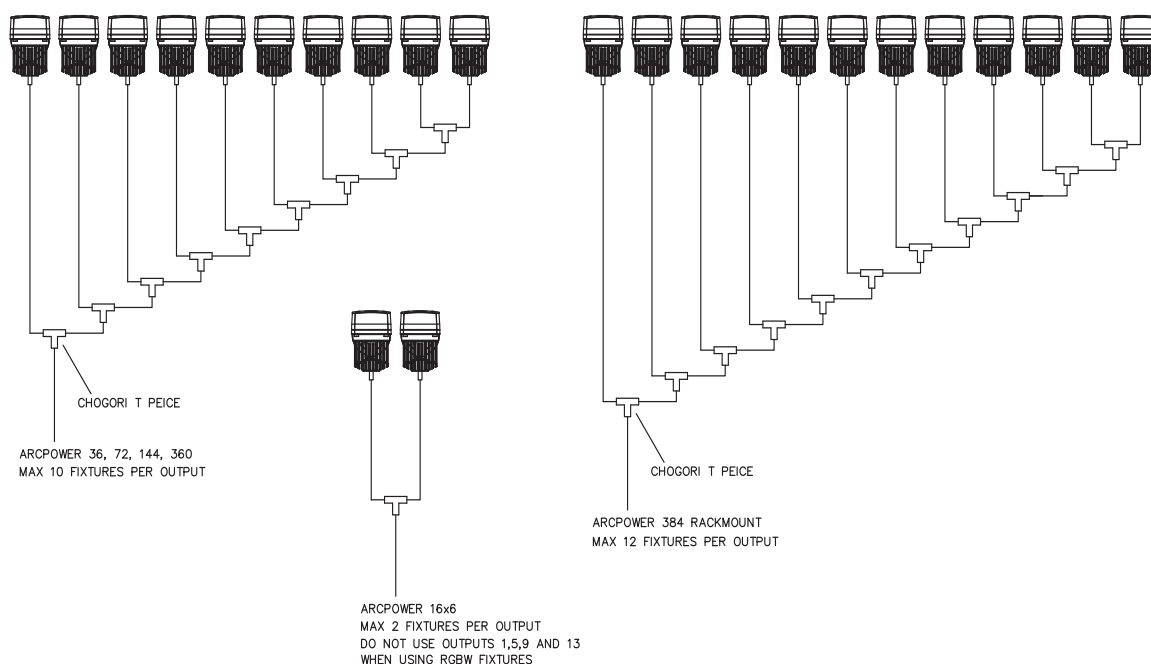


3. Connection ArcSource Outdoor 4 MC

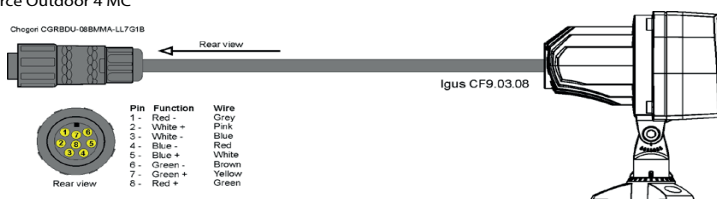

Adapter cable Chogori -Chogori (it is not a standard part of delivery)

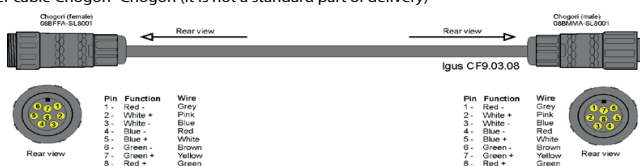

Adapter cable Chogori -RJ45 (it is not a standard part of delivery)

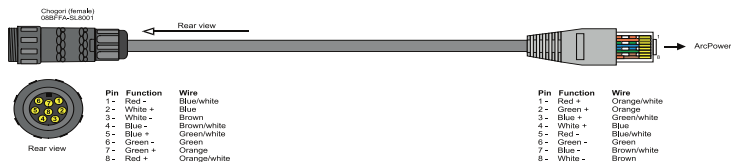

ROBE lighting s.r.o, Palackého 416 757 01 Valasské Meziříčí, Czech Republic. Tel: +420 571 751 500 - Fax: +420 571 751 515 - E-mail: info@anolis.eu
 UK: Anolis UK, 3 Spinney View, Stone Circle Road, Round Spinney Ind Est, NN3 8RF, Northampton, United Kingdom. Tel: +44 1604 741000 - Fax: +44 1604 741041 - E-mail: info@anolis.co.uk
 USA: Anolis Lighting, 12349 SW 53rd Street, Suite 202, Cooper City, Florida 33330, U.S.A. Tel: +1 844 426 6547 - +1-844-4 ANOLIS - Fax: [954] 680-1910 - E-mail: info@anolislighting.com
 AUS: Anolis Australia, 28 Expo Court, Ashmore, 4215, Queensland, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E-mail: info@anolis.com.au
 AUS: Anolis Australia, 5 Phillip Court, Port Melbourne, 3207, Victoria, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E-mail: info@anolis.com.au
 Asia and Pacific: Anolis Asia and Pacific, 12 New Ind Road, #02-05 Morningstar Centre, S-536202, Singapore. Tel: +65 6280 8558 - Fax: +65 6280 2896 - E-mail: asiapacific@anolis.eu
 Middle East: Anolis Middle East, Office Nbr 507 5th Floor, Al Asmawi Building DIP 1, Dubai, UAE. Po Box: 391 898 - Tel: +971 4 885 3223 - E-mail: middleeast@anolis.eu
 Russia and CIS: Taganskaya str. 26-1-72, 109004 Moscow, Russia. Tel: +7 495 504 9569 - E-mail: russia@anolis.eu
 Central and South America: Galicia 1198 ap 303, 1100, Montevideo, Uruguay. Tel: +5982 900 67 47 - E-mail: Latam@anolis.eu

www.anolis.eu | www.anolislighting.com

Accessories:


Land Spike 1 ASD4MC 500mm
Land Spike 2 ASD4MC 500mm
Land Spike 3 ASD4MC 500mm
Land Spike 1 ASD4MC 100mm
Land Spike 2 ASD4MC 100mm



Floor Stand for
Land Spike



10cm Adaptor
Stand



Top Hat



Half Top Hat



Pipe Clamp
Fits 1/2in Pipe

Extension Cable CGR8-F / RJ45, L0.25m
Extension Cable CGR8-F / RJ45, L3m
Extension Cable CGR8-F / RJ45, L7m
Extension Cable CGR8-F / RJ45, L15m
Extension Cable CGR8-F / RJ45, L20m
other lengths on request



Extension Cable CGR8-F / M, L1m
Extension Cable CGR8-F / M, L3m
Extension Cable CGR8-F / M, L7m
Extension Cable CGR8-F / M, L10m
Extension Cable CGR8-F / M, L20m
other lengths on request



Connector CGRBDU-08BFFA-SL8001



Connector CGRBDU-08BMMA-SL8001



T-Connector Chogori, 8-Pin, Screw



Connector Waterproof cap
(Fits Above Connecotr)



Connector Waterproof cap
(Fits Above Connecotr)

Product Specification:

Electrical	Input Voltage		48V DC
	Power Consumption		6w @ 350mA - 230V (10w @ 700mA)
Optical	Light Source		1 x 10w Multi-Chip LED
		RGBW	W= CW - 6500K - NW - 4200K
		RGBA	
		SW	2700K-6500K
		PW	3200K and 6500K
	LED Channels		Red, Green, Blue, White, Pure White, Smart White
	Beam Angle		11°, 26°, 36°
Control	Projected Lumen Maintenance		50,000 hrs (L70@ 25°C / 77°F)
	Wireless DMX (Optional Accessory)		N/A
	Control System		Anolis Lighting Controls or any Third Party DMX512 Controllers
	Power Supply		ArcPower Range
Physical	Stand Alone Control		N/A
	Width x Height x Depth	Inches	5.71 x 3.54 x 2.52
		mm	145 x 90 x 64
	Weight	lbs	1.37
		kg	0.62
	Housing		High Pressure Die-Cast Aluminium Body Tempered Glass
	Fixture Cable and Connections		LIYY 8xAWG22 - 0.5m Long (1.64ft) - Chogori IP68 Connector
	Fixing Method		Mounting Plate (3 Fixing Holes) Spike Option
	Adjustability		+/-60° (+80° -90° with Adaptor Plate)
	IP Rating		IP67
	IK Rating		IK**
	Cooling System		Convection
Certification	Operating Ambient Temperature		-20°C / +45°C (-4°F / +113°F)
	Operating Temperature		+75°C @ Ambient +50°C (+167°F @ Ambient +122°F)
Listings		ETL / cETL, CE, RoHS	

Subject to change without notice - please contact Anolis for clarification

Accessories	Description
	Allen Key (Included)
	Connector Chogori CGRBDU-08BFFA (Female) IP68 (included)
	Adaptor Stand (included)
	Screw M5x45 (Included)
	Land Spike Single (100mm)
	Land Spike Twin (100mm)
	Land Spike Single (500mm)
	Land Spike Twin (500mm)
	Land Spike Triple (500mm)
	Connector Chogori CGRBDU-08BFFA (Female) IP68
	Connector Chogori CGRBDU-08BMMA (Male) IP68
	Connector Chogori T Piece
	Connector Waterproof Cap (Male)
	Cable Chogori (Female) - RJ45 0.25m
	Cable Chogori (Female) - RJ45 3m
	Cable Chogori (Female) - RJ45 7m
	Cable Chogori (Female) - RJ45 15m
	Cable Chogori (Female) - RJ45 20m
	Cable Chogori (Female) - Chogori (Male) 3m
	<i>other lengths on request</i>



ROBE lighting s.r.o, Palackeho 416 757 01 Valasske Mezirici, Czech Republic. Tel: +420 571 751 500 - Fax: +420 571 751 515 - E-mail: info@anolis.eu
 UK: Anolis UK, 3 Spinney View, Stone Circle Road, Round Spinney Ind Est, NN3 8RF, Northampton, United Kingdom. Tel: +44 1604 741000 - Fax: +44 1604 741041 - E-mail: info@anolis.co.uk
 USA: Anolis Lighting, 12349 SW 53rd Street, Suite 202, Cooper City, Florida 33330, U.S.A. Tel: +1 844 426 6547 - +1-844-4 ANOLIS - Fax: [954] 680-1910 - E-mail: info@anolislighting.com
 AUS: Anolis Australia, 28 Expo Court, Ashmore, 4215, Queensland, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E-mail: info@anolis.com.au
 AUS: Anolis Australia, 5 Phillip Court, Port Melbourne, 3207, Victoria, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E-mail: info@anolis.com.au
 Asia and Pacific: Anolis Asia and Pacific, 12 New Ind Road, #02-05 Morningstar Centre, S-536202, Singapore. Tel: +65 6280 8558 - Fax: +65 6280 2896 - E-mail: asiapacific@anolis.eu
 Middle East: Anolis Middle East, Office Nbr 507 5th Floor, Al Asmawi Building DIP 1, Dubai, UAE. Po Box: 391 898 - Tel: +971 4 885 3223 - E-mail: middleeast@anolis.eu
 Russia and CIS: Taganskaya str. 26-1-72, 109004 Moscow, Russia. Tel: +7 495 504 9569 - E-mail: russia@anolis.eu
 Central and South America: Galicia 1198 ap 303, 1100, Montevideo, Uruguay. Tel: +5982 900 67 47 - E-mail: Latam@anolis.eu

www.anolis.eu | www.anolislighting.com

Land Spike Connection:


8. Installing the ArcSource Outdoor 4 MC onto a land spike

Land spike 1 ASO 4 MC 100mm / Land spike 2 ASO 4 MC 100mm

1. Hammer the sharp part (1) of the land spike into ground (hammer the centre of the sharp part, not the edge).
2. Screw the threaded bar (2) into the sharp part (1) and secure it with the socket head M5x5 (3).
3. Put the cover (4) on the threaded bar (2).
4. Put the pipe 36.5 mm (5) on the threaded bar (2).
5. Put the cable holder (6) on the threaded bar (2).

- Land spike 1 ASO 4 MC 100mm only.
6. Screw the nut (7) on the threaded bar (2).
 7. Screw the ArcSource Outdoor 4 MC on the nut (7). (Use the socket head M5x14 from the ArcSource Outdoor 4 MC to screw it to the nut (7)).
 8. Pass the cable throw the cable holder (6).

- Land spike 2 ASO 4 MC 100mm only.
6. Put the pipe 42 mm (6) on the threaded bar (2).
 7. Put the ArcSources holder (8) on the threaded bar (2).
 8. Screw the nut (9) on the threaded bar (2).
 9. Screw both ArcSource Outdoor 4 MC on the ArcSources holder (8).
 - (Use the socket heads M5x14 from the ArcSource Outdoors 4 MC to screw them to the holder (8)).
 10. Pass the cable throw the cable holder (6).

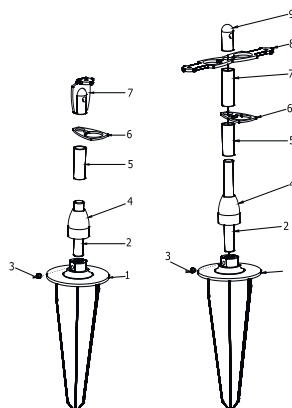


Land spike 1 ASO 4 MC 500mm / Land spike 2 ASO 4 MC 500mm

1. Hammer the sharp part (1) of the land spike into ground (hammer the centre of the sharp part, not the edge).
2. Screw the threaded bar (2) into the sharp part (1) and secure it with the socket head M5x5 (3).
3. Put the cover (4) on the threaded bar (2).
4. Put the pipe 36.5mm (5) on the threaded bar (2).
5. Put the cable holder (6) on the threaded bar (2).
6. Put the pipe 198mm (7) on the threaded bar (2).
7. Put the cable holder (6) on the threaded bar (2).
8. Put the pipe 198mm (7) on the threaded bar (2).


- Land spike 1 ASO 4 MC 500mm only:
9. Put the cable holder (6) on the threaded bar (2).
 10. Screw the nut (8) on the threaded bar (2).
 11. Screw the ArcSource Outdoor 4 MC on the nut (8). (Use the socket head M5x14 from the ArcSource Outdoor 4 MC to screw it to the nut (7)).
 12. Pass the cable throw the cable holders (6).

- Land spike 2 ASO 4 MC 500mm only:
9. Put the ArcSources holder (8) on the threaded bar (2).
 10. Screw the nut (9) on the threaded bar (2).
 11. Screw both ArcSource Outdoor 4 MC on the ArcSources holder (8).
 - (Use the socket head M5x14 from the ArcSource Outdoors 4 MC to screw them to the holder (8)).
 12. Pass the cable throw the cable holders (6).

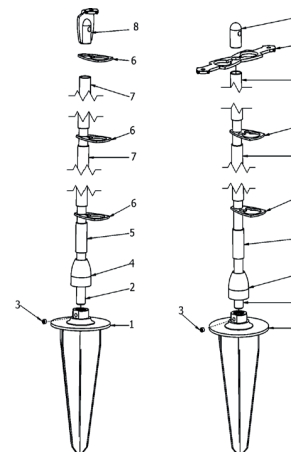



Land spike Land spike 3 ASO 4 MC 500mm

1. Hammer the sharp part (1) of the land spike into ground (hammer the centre of the sharp part, not the edge).
2. Screw the threaded bar (2) into the sharp part (1) and secure it with the socket head M5x5 (3).
3. Put the cover (4) on the threaded bar (2).
4. Put the pipe 36.5mm (5) on the threaded bar (2).
5. Put the cable holders (6) on the threaded bar (2).
6. Put the pipe 198mm (7) on the threaded bar (2).
7. Put the ArcSources holder (8) on the threaded bar (2).
8. Put the pipe 198mm (7) on the threaded bar (2).
9. Put the cable holder (6) on the threaded bar (2).
10. Screw the nut with holder (9) on the threaded bar (2).
11. Screw ArcSources Outdoor 4 MC on the ArcSources holders (8,9).
- (Use the socket head M5x14 from the ArcSource Outdoors 4 MC to screw them to the holder (8)).
12. Pass the cable throw the cable holders (6).

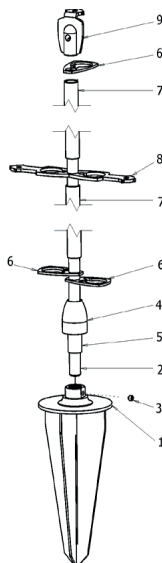



Photometric Data:

ArcSource Outdoor 4MC - 11° 350mA

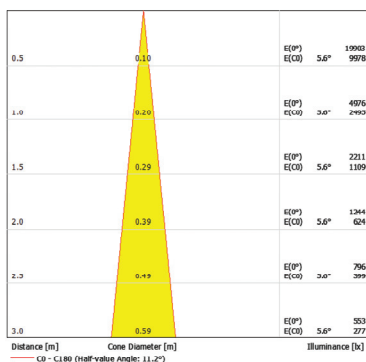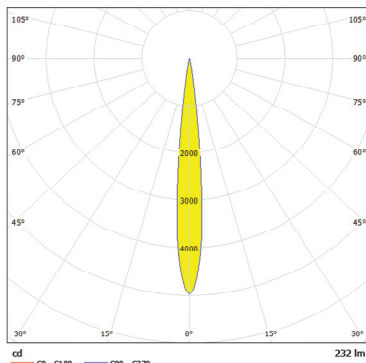

Total Luminous Flux: 232lm



ArcSource Outdoor 4MC - 26° 350mA

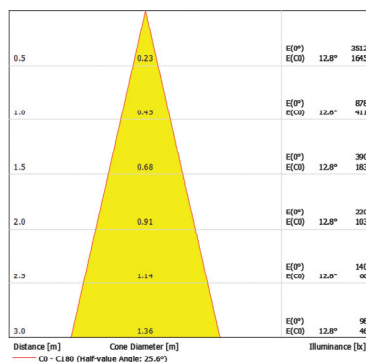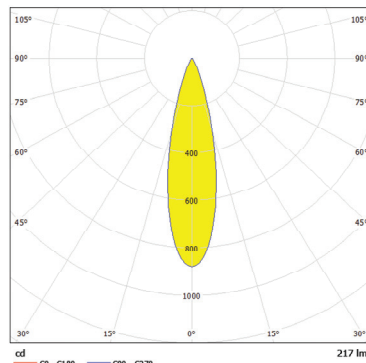

Total Luminous Flux: 217lm



For foot Candles divide lux by 10.7

ArcSource Outdoor 4MC - 36° 350mA

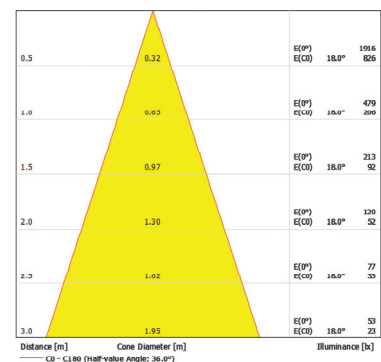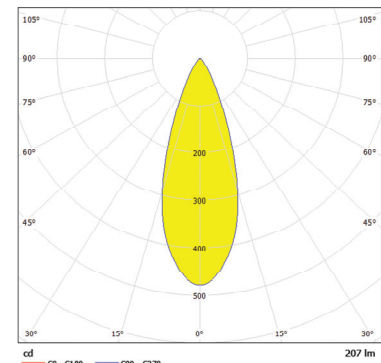



Total Luminous Flux: 207lm

ArcSource Outdoor 4MC - 11° 700mA

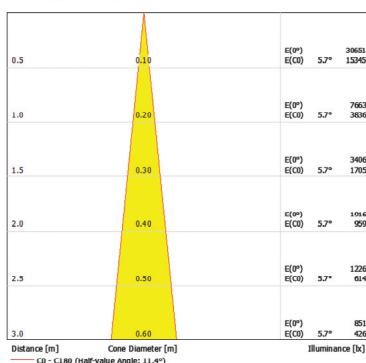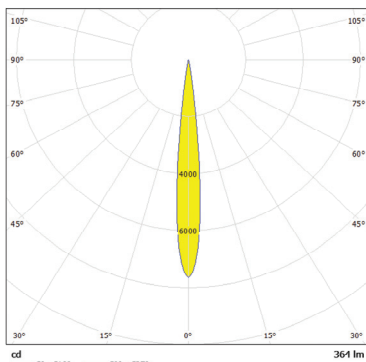



Total Luminous Flux: 364lm

ArcSource Outdoor 4MC - 26° 700mA

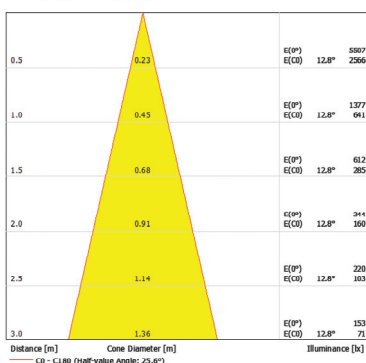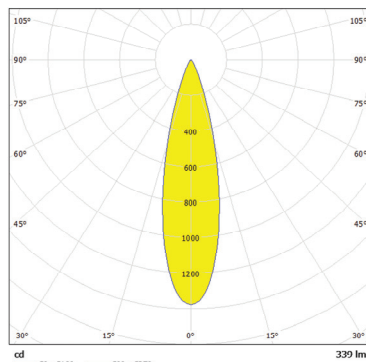

Total Luminous Flux: 339lm

ArcSource Outdoor 4MC - 36° 700mA

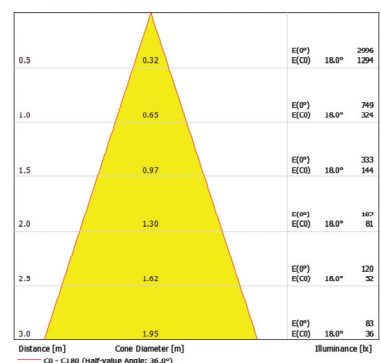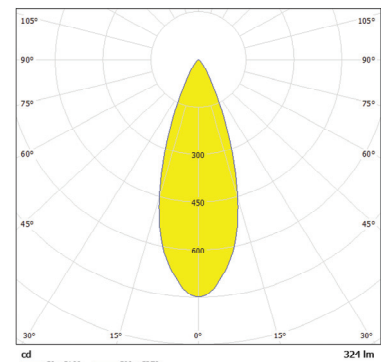

Total Luminous Flux: 324lm

ROBE lighting s.r.o., Palackého 416 757 01 Valasske Mezirici, Czech Republic. Tel: +420 571 751 500 - Fax: +420 571 751 515 - E-mail: info@anolis.eu
 UK: Anolis UK, 3 Spinney View, Stone Circle Road, Round Spinney Ind Est, NN3 8RF, Northampton, United Kingdom. Tel: +44 1604 741000 - Fax: +44 1604 741041 - E-mail: info@anolis.com.uk
 USA: Anolis Lighting, 12349 SW 53rd Street, Suite 202, Cooper City, Florida 33330, U.S.A. Tel: +1 844 426 6547 - +1-844-4 ANOLIS - Fax: (954) 680-1910 - E-mail: info@anolislighting.com
 AUS: Anolis Australia, 28 Expo Court, Ashmore, 4215, Queensland, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E-mail: info@anolis.com.au
 AUS: Anolis Australia, 5 Phillip Court, Port Melbourne, 3207, Victoria, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E-mail: info@anolis.com.au
 Asia and Pacific: Anolis Asia and Pacific, 12 New Ind Road, #02-05 Morningstar Centre, S-536202, Singapore. Tel: +65 6280 8558 - Fax: +65 6280 2896 - E-mail: asiapacific@anolis.eu
 Middle East: Anolis Middle East, Office Nbr 507 5th Floor, Al Asmawi Building DIP 1, Dubai, UAE. Po Box: 391 898 - Tel: +971 4 885 3223 - E-mail: middleeast@anolis.eu
 Russia and CIS: Taganskaya str. 26-1-72, 109004 Moscow, Russia. Tel: +7 495 504 9569 - E-mail: russia@anolis.eu
 Central and South America: Galicia 1198 ap 303, 1100, Montevideo, Uruguay. Tel: +5982 900 67 47 - E-mail: Latam@anolis.eu

www.anolis.eu | www.anolislighting.com