


E-BOX™ REMOTE BASIC MINI

The most economical solution to control up to 10 Eminere Remote 1 luminaires per device, the E-Box Remote Basic Mini features an auto-ranging power supply suitable for mains voltages between 120–277 V AC for optimal performance. The 48 V DC output voltage insures safe operation. With control via wired USITT DMX512, the E-Box Remote Basic Mini is the ideal combination of technology standards and cost effectiveness in a durable housing with both IK09 and IP66 protection ratings and a 5 year warranty.

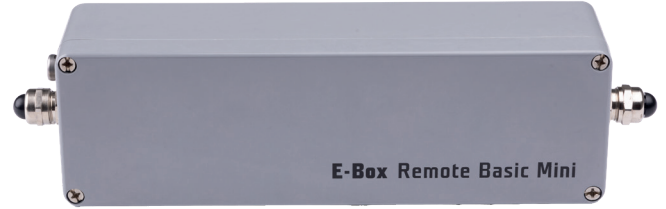

KEY FEATURES


Output & Control

The E-Box Remote Basic Mini with single output allows the connection of up to 10 Eminere Remote 1 luminaires per device with a low 48 V output for safe operation.

Physical

E-Box Remote Basic Mini holds IP66 and IK09 certifications for robust reliability.

STANDARD & SPECIFICATION




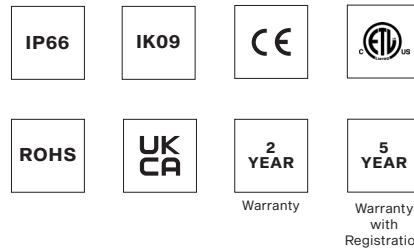


FINISH OPTIONS



Grey
RAL 7000

DIMENSIONS

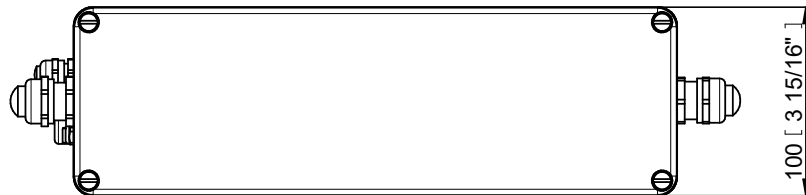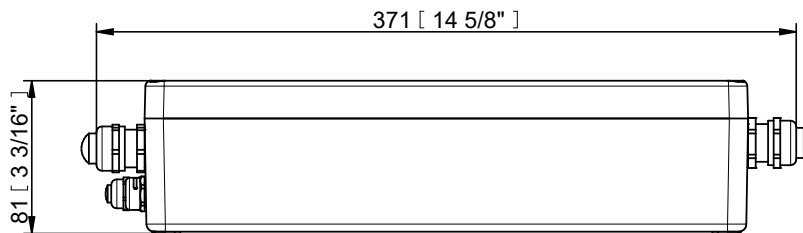


SPECIFICATION

ELECTRICAL	Input Voltage	120 - 277 V AC 50 / 60 Hz
	Typical Power Consumption	260 W
CONTROL	Power supply	Integrated
	Connectivity	10 pcs of Eminere Remote 1 (25m cable)
PHYSICAL	Width x Height x Depth	371 x 100 x 81 mm (14.61 x 3.9 x 3.2 in.)
	Weight	2.66 kg / 5.9 lbs
	Number of LED Output zones	1
	Max. Load Per Output	10 pcs of Eminere Remote 1 (25m cable)
	Cable Length per E-Box	Max. 25 m (@ 10 pcs) Max. 50 m (@ 8 pcs) Max. 75 m (@ 6 pcs) Max. 100 m (@ 5 pcs)
	Housing	Polyester (Glass-fiber reinforced)
	Finish Options	Standard Colour - Grey (RAL 7000)
	Cables / Connections	Cable Grommet (stainless steel)
	Mounting Method	Surface Mount, 4 Mounting Holes
	Protection Factor	IP66 / Suitable For Wet Locations
	IK Rating	IK09
Cooling System	Convection	
Operating Ambient Temperature	-20 °C / +40 °C (-4 °F / +104 °F)	
CERTIFICATION	Listings	ETL / cETL, CE, RoHS, UKCA

CONNECTION

The table states max. number of Eminere Remote (UVinere Remote) modules connected to the E-box Remote Basic Mini.

Cable length (m)	Max. number of Emineres Remote connected to the E-Box Remote Basic Mini			
	EMINERE REMOTE 1	EMINERE REMOTE 2 (UV)	EMINERE REMOTE 3	EMINERE REMOTE 4 (UV)
25	10	5	3	2
50	8	4	2	2
75	6	3	2	1
100	5	2	1	1

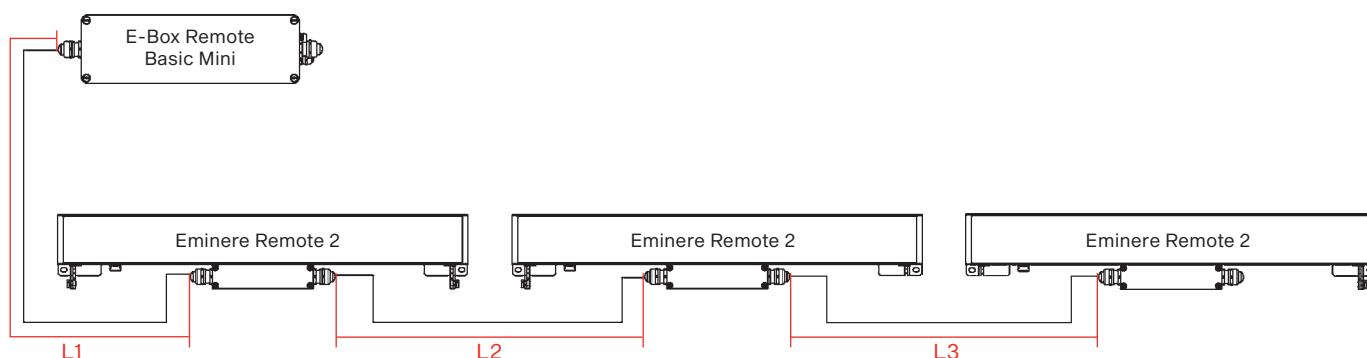

* Cable length is a total cable length between E-box Remote Basic Mini and last connected Eminere Remote. Example: Total cable length=L1+L2+L3