

# ArcPower 48 <sup>tm</sup>



Client: \_\_\_\_\_

Project: \_\_\_\_\_


Specifier: \_\_\_\_\_

Type: \_\_\_\_\_ Qty: \_\_\_\_\_



**FEATURES:**

- Input Voltage: 100-240V AC 50-60Hz
- Power consumption: 60W
- Max Load:  
48 x Luxeon Rebel LED's
- Control: DMX 512, USITT
- Housing: Steel Plate
- Max Cable Length: 40m
- Fixing Method: 2 Fixing Holes
- IP Rating: IP2X
- Operating Ambient Temp: +40°C (+104°F )
- Certification: CE, RoHS
- 5 Year Warranty

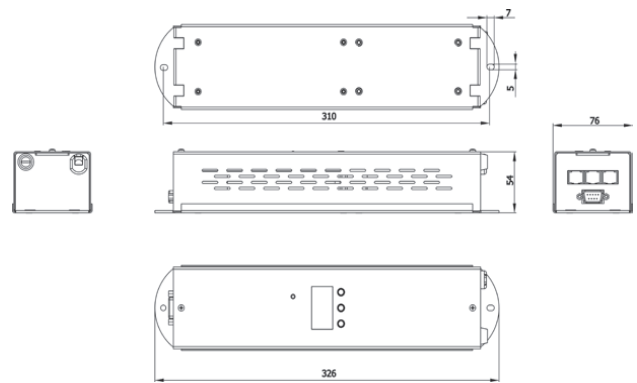

## Product Specification:

Electrical	Input Voltage		100-240V AC 50/60 Hz
	Power Consumption		60W +/-10%
	Max Output Current		700mA (White Green Blue) 420mA (Red)
Control	Interface Protocol		USITT, DMX512, DyNet, RS232
	Operation Modes		DMX, Master/ Slave, Stand-Alone
	Display		3 Digit LED
Physical	Width x Height x Depth	Inches	12.9 x 2.13 x 3
		mm	326 x 54 x 76
	Weight	lbs	2.43
		kg	1.1
	Number of Led Output Zones		1
	Maximum Load Per Zone	RGB	48 Luxeon Rebel LED's
	Total Load	RGB	48 Luxeon Rebel LED's
	DMX Channels		3, 4, 6, 7, 4
	DMX Modes		5
	Built in Programs		10
	Editable Programs		3 (Upto 50 Steps Each)
	Max Cable Length		40m Max Per Zone
	LED Output Connection		RJ45
	DMX Connection		RJ45
	RS232 Connection		DE-9 (Male)
	Fixing Method		2 Mounting Holes
	IP Rating		IP2X
	IK Rating		N/A
	Cooling System		Convection
	Operating Temperature Range		-10°C / +40°C (14°F / +104°F)
Certification	Listings		CE, RoHS

Subject to change without notice - please contact Anolis for clarification

Accessories	Description
	Cable Joiner (included)
	RJ45 / DMX 3 Pin Adaptor (Included)
	RJ45 / DMX 5 Pin Adaptor (Included)

