

EMINERE™ FAMILY



EMINERE™ FAMILY

The new Eminere™ range by Anolis builds on the success of the original Accline™ Outdoor Series with precision optics and is available in a variety of sizes. It's perfect for a wide range of exterior and interior applications such as Flood Lighting, Wall Grazing, Wall Washing and Accent Lighting. Built to exact standards, these linear fixtures are tough enough to withstand extreme environments whilst producing beautiful colours from the RGBW, RGBA or PureWhite LED chips.





FLEXIBILITY

The Emirene™ range was designed to be the new industry standard. Architectural lighting has never been easier. Emirene's flexibility gives Lighting Designers a limitless tool which meets every possible scenario for position and placement, environment, size of illuminated area as well as specific LED chip selection combined with high quality holographic filters for precise colourmixing and beam definition.




COLOURS



RGBW



RGBA



PureWhite



Tunable White

COLOUR TEMPERATURE



2,500 K



2,700 K




3,000 K



3,500 K



4,000 K



5,000 K



6,500 K



2,700-6,500 K

FINISH OPTIONS




RAL 9011
Graphite Black



RAL 9006
Silver



RAL - Custom
Paint Colour



Harsh
Environment

LENGTHS



CONTROLS PROTOCOLS



STANDARD & SPECIFICATION



OPTIC OPTIONS
SYMETRICAL



9°



15°



30°



50°



50°



50°



50°



50°




50°



50°



50°



50°



50°



50°



50°



50°



50°



50°



50°



50°



50°



50°



50°

WIDE WALLWASHER



WALLWASHER



OPTIC OPTIONS
BI-SYMMETRICAL



10x30°



10x30°



10x30°



10x30°



10x30°




10x30°



10x30°



10x30°




10x30°



10x30°



10x30°




10x30°



10x30°



10x30°




10x30°



10x30°



10x30°




10x30°



10x30°



10x30°




10x30°



10x30°



10x30°



10x30°




10x30°



OPTICAL PERFORMANCE

Eminere™ fixtures accommodate a combination of high power LEDs, specifically designed optics and a wide variety of optical tools with many different beam spreads. Selection of the correct configuration is quick and easy.

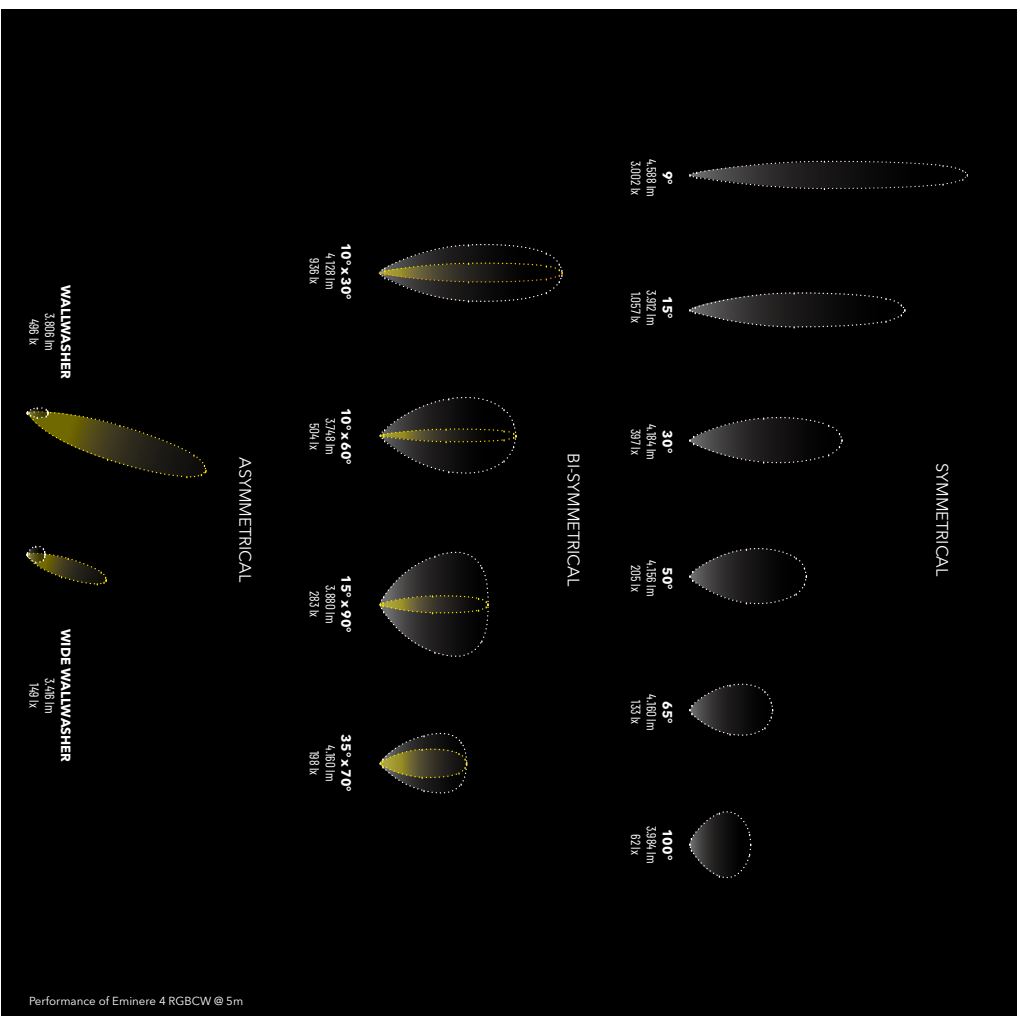





APPLICATION FLEXIBILITY

Lighting design can be challenging and the result is dependent on the right application. Consider textured materials for wall grazing, homogenised output and uniform coverage for wall washing, picking up contours or specific passages for accent lighting and flood lighting is ideal for places that are not always easy accessible.

Spacing = distance between head of luminaires
 Setback = distance from the wall to luminaire
 Av. illuminance = average illuminance on the wall [lx]
 min/av. = minimum value of illuminance on the wall = uniformity of light intensity distribution on the wall
 max/av. = average value of illuminance on the wall


10

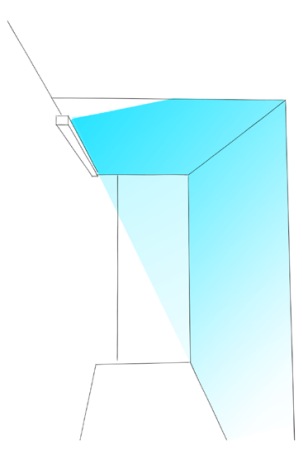

FLOOD LIGHTING

THINK BIG Using flooding optics gives flexibility to illuminate large areas with minimum fixture positioning requirements. Thinking about bridge arcades, giant walls or tunnels illumination? Flood lighting will be the right solution for you.

7m wall	USE EMINERE 30° spacing = 0 cm setback = 10 cm
5m wall	USE EMINERE 40° spacing = 0 cm setback = 10 cm
3m wall	USE EMINERE 60° spacing = 5 cm setback = 10 cm
2m wall	USE EMINERE 90° spacing = 10 cm setback = 10 cm

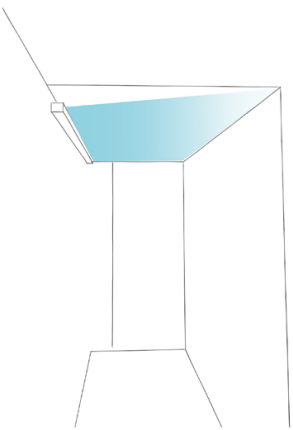

9°	15°	10° x 30°
10° x 60°	10° x 90°	30° x 60°

WALL GRAZING


GET CLOSE } Place fixture close to the surface and let it highlight the texture of the illuminated material. Grazing is an ideal method to bring out every single detail and create a very natural look.

10m wall	Use EMINERE 9° spacing = 0 cm setback = 10 cm
7m wall	Use EMINERE 15° spacing = 0 cm setback = 10 cm
5m wall	Use EMINERE 10°x30° spacing = 0 cm setback = 10 cm
3m wall	Use EMINERE 10°x60° spacing = 5 cm setback = 10 cm
2m wall	Use EMINERE 10°x90° 30°x60° spacing = 10 cm / setback = 10 cm



WALL WASHING

KEEP DISTANCE } Having distance between the fixture and the surface allows an even application of light that gives the surface texture a flat appearance.

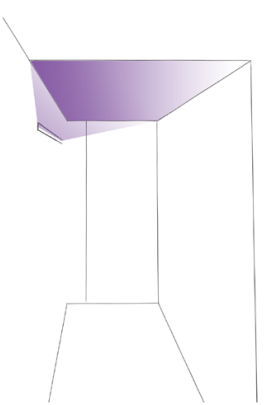

10m wall	Use EMINERE WALLWASHER spacing = 90 cm setback = 170 cm Av. Illuminance: 80 lx (min/av.=32)	or	Use EMINERE WALLWASHER WIDE spacing = 460 cm setback = 235 cm Av. Illuminance: 50 lx (min/av.=32)
7m wall	Use EMINERE WALLWASHER spacing = 90 cm setback = 170 cm Av. Illuminance: 257 lx (min/av.=20)	or	Use EMINERE WALLWASHER WIDE spacing = 80 cm setback = 180 cm Av. Illuminance: 75 lx (min/av.=20)
5m wall	Use EMINERE WALLWASHER spacing = 40 cm / setback = 80 cm Av. Illuminance: 400 lx (min/av.=24)	or	Use EMINERE WALLWASHER WIDE spacing = 50 cm / setback = 135 cm Av. Illuminance: 177 lx (min/av.=27)
3m wall	Use EMINERE WALLWASHER WIDE spacing = 50 cm setback = 90 cm Av. Illuminance: 300 lx (min/av.=139)		
2m wall	Use EMINERE WALLWASHER WIDE spacing = 65 cm / setback = 65 cm Av. Illuminance: 600 lx (min/av.=100)		



COLOUR MIXING

The Emineer™ family offers a full spectrum of colors with the latest technology standards such as 18-bit resolution for stepless color fades, amber-shift for sunrise/sunset emulation, internal CTO or green color correction channel. Specially designed glass printings help improve color mixing and blend all LEDs into the desired hue.

STAND ALONE

specially designed glass printing to achieve optimal colour mixing and intensity distribution. No matter which colour pallet is chosen, output is always perfectly consistent and balanced from one side to the other.

HEAD 2 HEAD

fixtures installed right next to each other create absolutely perfect colour and intensity overlap which helps outputted light hit surfaces in the desired colour tone.







CONNECTIVITY

The entire Emira™ family was designed for both detail and simplicity. Key benefits for installers and integrators is intuitive connection and wiring, click-on connectors for quick installation or fixture replacement, and super long runs with over 900 Emira™s 1 in a star or Daisy connection.

16

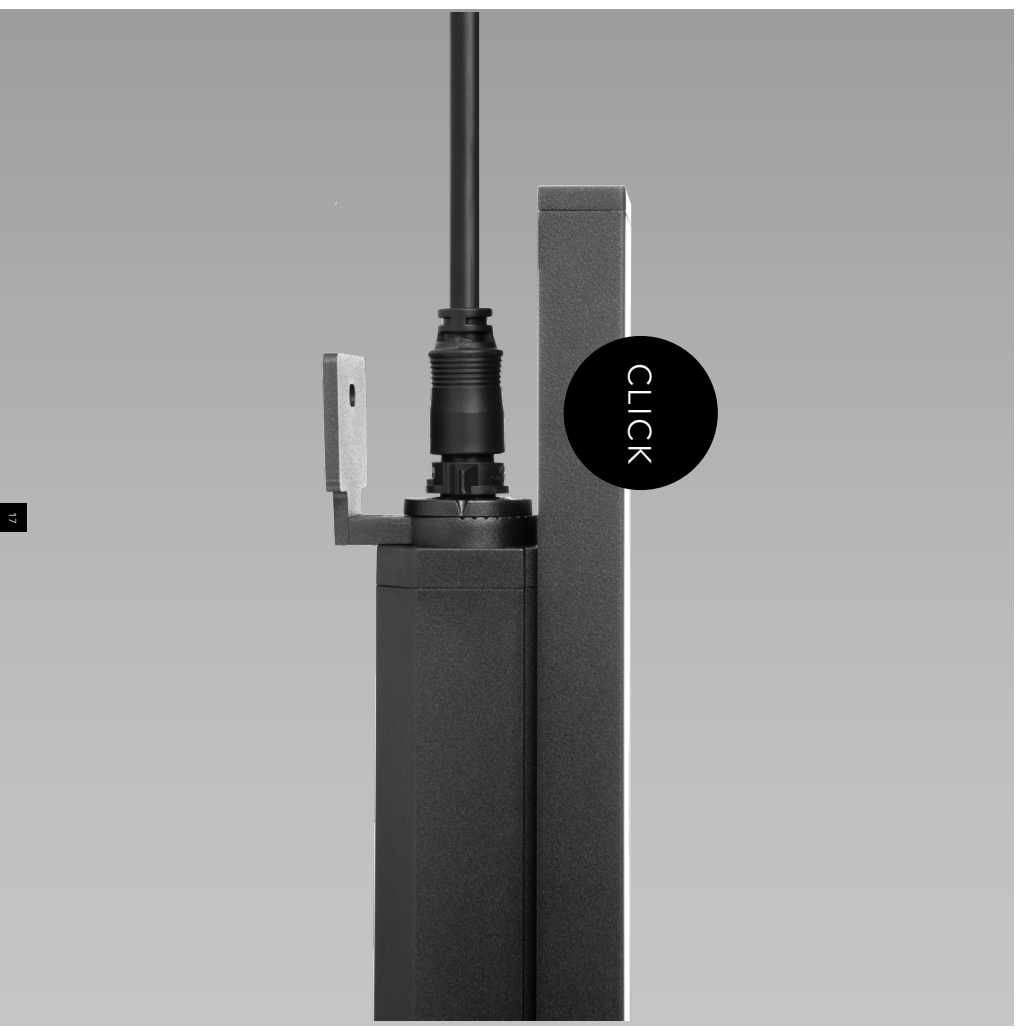

17

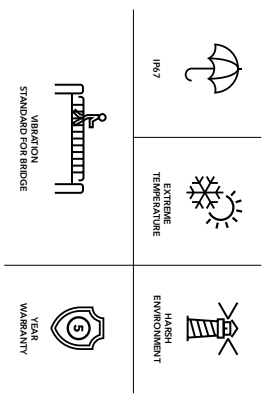


DURABILITY

Every member of the Eminere™ family is equipped with the latest technology to meet market standards and LD's high expectations. Classified ingress protection of IP67 declares usability in wet locations, vibration testing allows use of the Eminere™ family in traffic and with bridges, while special coating means Eminere™ fixtures can withstand marine or harsh conditions and it comes with a 5 year limited customer warranty.

OUTDOOR USAGE	EXTREME TEMPERATURES	HARSH ENVIRONMENT	VIBRATION STANDARDS FOR BRIDGE APPLICATIONS	WARRANTY FOR 5 YEARS
IP67 rated fixtures suitable for wet locations	-20°C to +40°C (-4°F to +104°F) operating temperatures	Suitable for salt spray environments and extreme outdoor applications. C136.31	meets IEC 60598-1 and 3G ANSI C136.31	with LED lifespan up to 60,000 hours (L70@25°C)





EMINERE™ 1 / 2 / 3 / 4

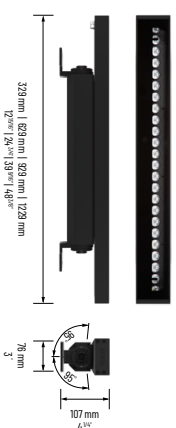

specifications

ELECTRICAL	Input Voltage	100 - 277 V AC 50/60 Hz		
	Typical Power Consumption	Emirene 1	25 W	
		Emirene 2	45 W	
		Emirene 3	45 W	
		Emirene 4	85 W	
OPTICAL	Colour Variants	RGBW (V - 6,500 K)	RGBA	WW (W - 3,000 K)
	Beam Angle	Variants On Request (2,500 K 2,700 K 3,000 K 3,500 K 4,000 K 5,000 K 6,500 K)		
	Lumen Output Delivered	Symmetrical: 9° 15° 30° 50° 60° x 10° x 60° 60° x 10° x 35° x 70° 70° x 35° 15° x 90° 90° x 15°		
	Projected Lumen Maintenance	Bisymmetrical: 10° x 30° 10° x 10° x 60° 60° x 10° x 35° x 70° 70° x 35° 15° x 90° 90° x 15°		
CONTROL	Interface Protocol	Multiwasher		
	Control System	up to 4,588 lm (Emirene 4, RGBW @ 9°)		
	Operating Modes	60,000 hrs (L70 @ 25 °C / 77 °F)		
	Connectivity	USBT DMX512 RDM LANNet DM-Net DM-Net2 ACN King-Net Wireless DMX (option)	E-box Line	E-box Daisy
		E-box Line	E-box Daisy	E-box Star
		Panel (12 LEDs) or Fixture mode		E-box PRO
PHYSICAL	Weight	E-box Line: 159 of Emirene 1 (@ 230 V and 30m cable) via 1 Output		
	Width x Height x Length	E-box Star: 159 of Emirene 1 (@ 230 V and 30m cable) via 1 Output		
	Weight	E-box PRO: 954 of Emirene 1 (@ 230 V and 30m cable) via 6 Outputs		
	Weight	Emirene 1	76 x 107 x 329 mm (2.99 x 3.58 x 12.95 in.)	
	Weight	Emirene 2	76 x 107 x 629 mm (2.99 x 3.58 x 24.76 in.)	
	Weight	Emirene 3	76 x 107 x 929 mm (2.99 x 3.58 x 36.57 in.)	
	Weight	Emirene 4	76 x 107 x 1229 mm (2.99 x 3.58 x 48.38 in.)	
	Weight	2.5 kg 5.5 lbs	4.2 kg 9.25 lbs	5.9 kg 13 lbs
	Weight	4.2 kg 9.25 lbs	5.9 kg 13 lbs	8.7 kg 19.2 lbs
	Material	High Pressure Extruded Aluminium Body, End Caps, Die-Cast Aluminium, Tempered Glass		
	Finish Options	Standard Colour - Graphite Black (RAL 9011) Silver (RAL 9006)		
	Cables / Connections	Cost Option - Custom RAL Harsh Environment (RAL 9016, RAL 9011)		
	Protection Factor	IP67 Hybrid Connection (Power + Data)		
	IK Rating	IP67 Suitable For Wet Locations		
	IK Rating	IK06		




EMINERE™ Side 1 / 2 / 3 / 4

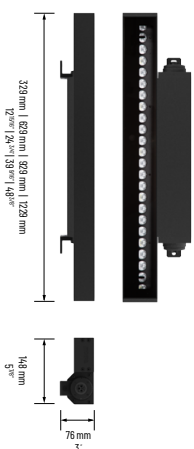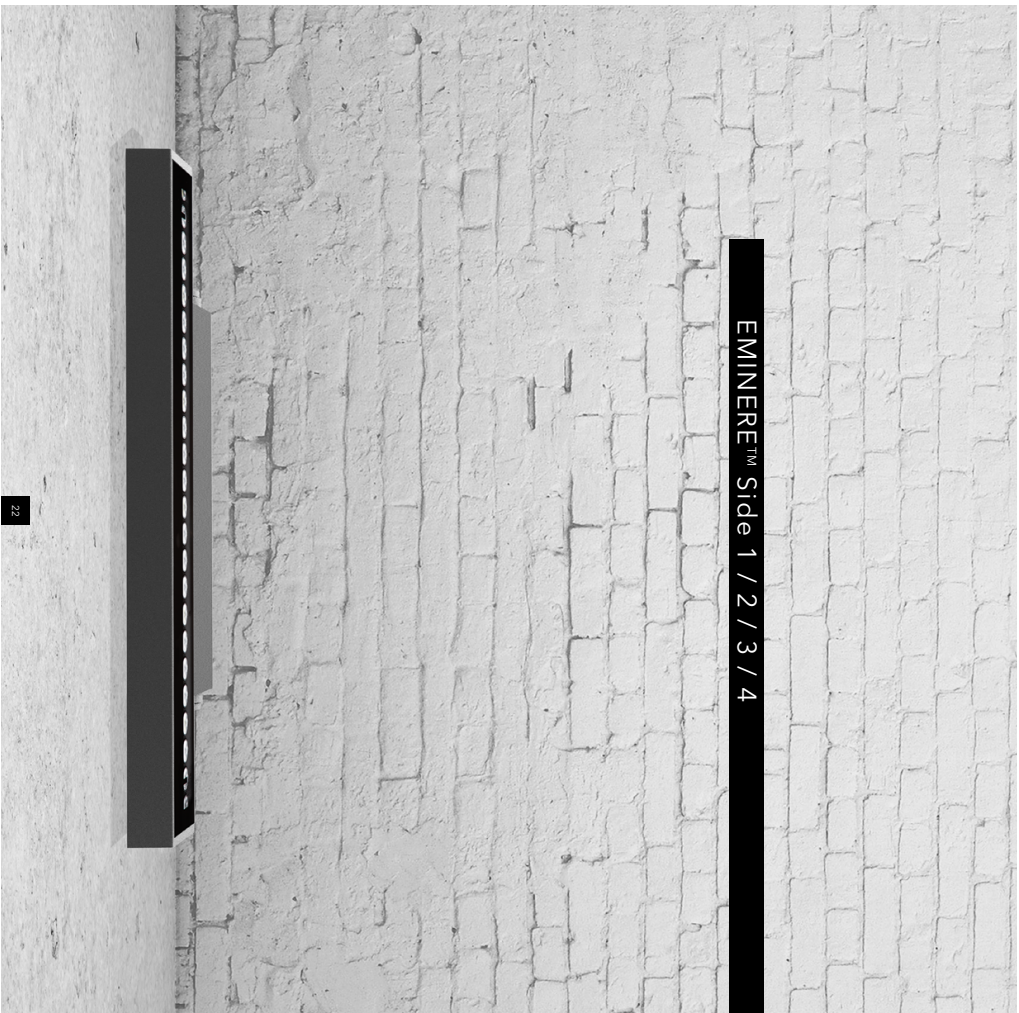

Specifications

ELECTRICAL				
Input Voltage	100 - 277 VAC/50/60 Hz			
Typical Power Consumption	Eminere Side 1	25 W		
	Eminere Side 2	45 W		
	Eminere Side 3	65 W		
	Eminere Side 4	85 W		
Colour Variants	RGBW (W - 4,500 K) RGBW (W - 5,500 K) RGBW (W - 6,500 K) RGBW (W - 7,500 K) RGBW (W - 8,500 K) RGBW (W - 9,500 K) RGBW (W - 10,500 K) RGBW (W - 11,500 K) RGBW (W - 12,500 K) RGBW (W - 13,500 K) RGBW (W - 14,500 K) RGBW (W - 15,500 K) RGBW (W - 16,500 K) RGBW (W - 17,500 K) RGBW (W - 18,500 K) RGBW (W - 19,500 K) RGBW (W - 20,500 K) RGBW (W - 21,500 K) RGBW (W - 22,500 K) RGBW (W - 23,500 K) RGBW (W - 24,500 K) RGBW (W - 25,500 K) RGBW (W - 26,500 K) RGBW (W - 27,500 K) RGBW (W - 28,500 K) RGBW (W - 29,500 K) RGBW (W - 30,500 K) RGBW (W - 31,500 K) RGBW (W - 32,500 K) RGBW (W - 33,500 K) RGBW (W - 34,500 K) RGBW (W - 35,500 K) RGBW (W - 36,500 K) RGBW (W - 37,500 K) RGBW (W - 38,500 K) RGBW (W - 39,500 K) RGBW (W - 40,500 K) RGBW (W - 41,500 K) RGBW (W - 42,500 K) RGBW (W - 43,500 K) RGBW (W - 44,500 K) RGBW (W - 45,500 K) RGBW (W - 46,500 K) RGBW (W - 47,500 K) RGBW (W - 48,500 K) RGBW (W - 49,500 K) RGBW (W - 50,500 K) RGBW (W - 51,500 K) RGBW (W - 52,500 K) RGBW (W - 53,500 K) RGBW (W - 54,500 K) RGBW (W - 55,500 K) RGBW (W - 56,500 K) RGBW (W - 57,500 K) RGBW (W - 58,500 K) RGBW (W - 59,500 K) RGBW (W - 60,500 K) RGBW (W - 61,500 K) RGBW (W - 62,500 K) RGBW (W - 63,500 K) RGBW (W - 64,500 K) RGBW (W - 65,500 K) RGBW (W - 66,500 K) RGBW (W - 67,500 K) RGBW (W - 68,500 K) RGBW (W - 69,500 K) RGBW (W - 70,500 K) RGBW (W - 71,500 K) RGBW (W - 72,500 K) RGBW (W - 73,500 K) RGBW (W - 74,500 K) RGBW (W - 75,500 K) RGBW (W - 76,500 K) RGBW (W - 77,500 K) RGBW (W - 78,500 K) RGBW (W - 79,500 K) RGBW (W - 80,500 K) RGBW (W - 81,500 K) RGBW (W - 82,500 K) RGBW (W - 83,500 K) RGBW (W - 84,500 K) RGBW (W - 85,500 K) RGBW (W - 86,500 K) RGBW (W - 87,500 K) RGBW (W - 88,500 K) RGBW (W - 89,500 K) RGBW (W - 90,500 K) RGBW (W - 91,500 K) RGBW (W - 92,500 K) RGBW (W - 93,500 K) RGBW (W - 94,500 K) RGBW (W - 95,500 K) RGBW (W - 96,500 K) RGBW (W - 97,500 K) RGBW (W - 98,500 K) RGBW (W - 99,500 K) RGBW (W - 100,500 K)			
Beam Angle	Symmetrical: 10° x 30° 30° x 10° 10° x 60° 60° x 10° 35° x 70° 70° x 35° 15° x 90° 90° x 15° Bisymmetrical: 10° x 30° 30° x 10° 10° x 60° 60° x 10° 35° x 70° 70° x 35° 15° x 90° 90° x 15° Wallwasher			
Lumen Output Delivered	up to 4,588 lm (Eminere 4, RGBW @ 9°)			
Projected Lumen Maintenance	60,000 hrs (L70 @ 25 °C / L77 °F)			
Interface Protocol	USITT DMX512 RDM ArtNet MA-Net MA-Net2 sACN KingNet Wireless DMX (optional)			
Control System	E-box Lite E-box Daily E-box Star E-box PRO			
Operating Modes	Pixel (12 LEDs) or Fixture mode			
Connectivity	E-box Lite: 159 of Eminere 1 (@ 230 V and 30m cable) via 1 Output			
	E-box Daily: 159 of Eminere 1 (@ 230 V and 30m cable) via 1 Output			
	E-box Star: 159 of Eminere 1 (@ 230 V and 30m cable) via 6 Outputs			
	E-box PRO: 954 of Eminere 1 (@ 230 V and 30m cable) via 6 Outputs			
Width x Height x Length	Eminere Side 1	148 x 76 x 329 mm (5.83 x 2.99 x 12.95 in.)		
	Eminere Side 2	148 x 76 x 629 mm (5.83 x 2.99 x 24.76 in.)		
	Eminere Side 3	148 x 76 x 929 mm (5.83 x 2.99 x 36.57 in.)		
	Eminere Side 4	148 x 76 x 1229 mm (5.83 x 2.99 x 48.38 in.)		
Weight	2.5 kg 5.5 lbs	4.2 kg 9.25 lbs	5.9 kg 13 lbs	8.7 kg 19.2 lbs
	High Pressure Extruded Aluminum Body, End Caps - Die-Cast Aluminum, Tempered Glass			
Finish Options	Standard Colour - Graphite Black (RAL 9011) Silver (RAL 9006)			
	Cost Option - Custom RAL Harsh Environment (RAL 9016, RAL 9011)			
Cables / Connections	IP67 Hybrid Connection (Power + Data)			
	IP67 / Suitable For Wet Locations			
Protection Factor	IK06			


EMINERE™ Inground 2

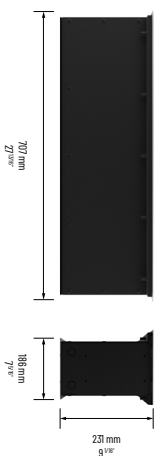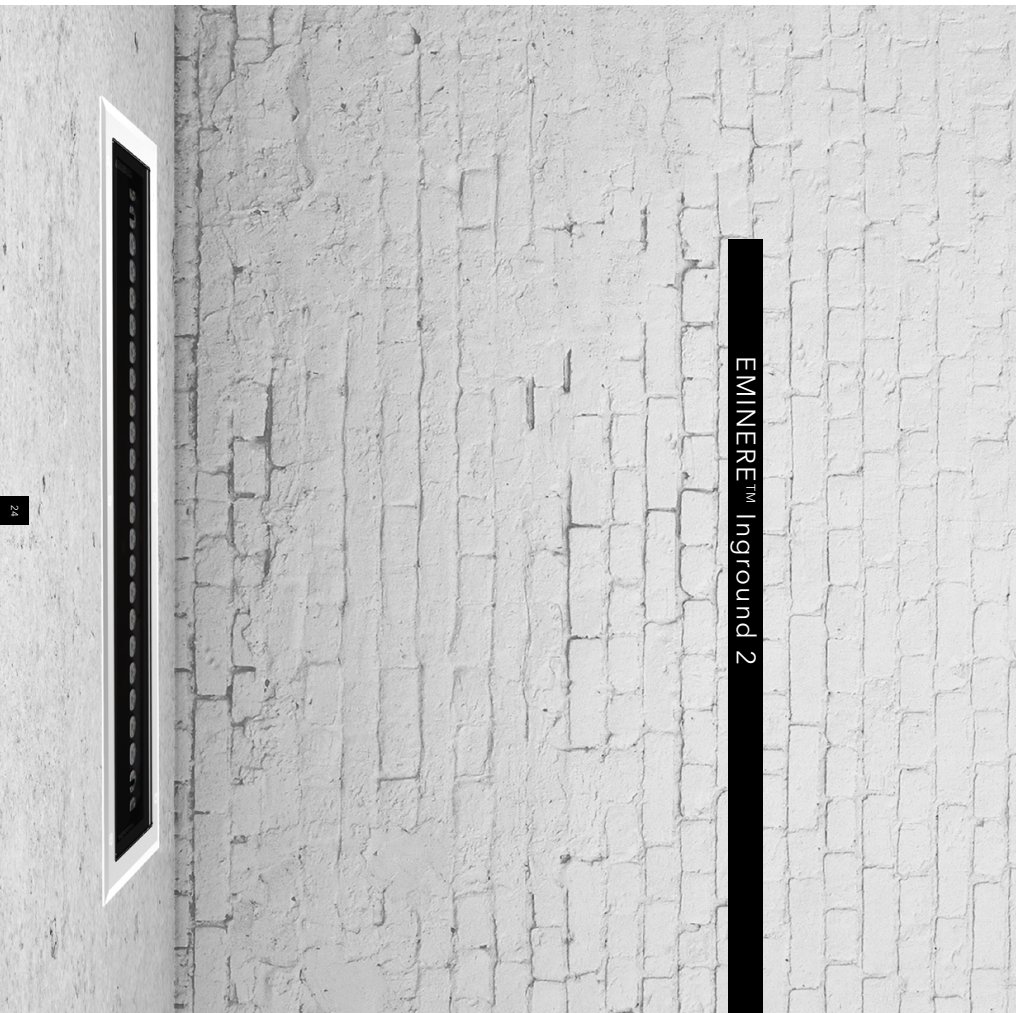

specifications

ELECTRICAL	Input Voltage	100 - 277 VAC/50/60 Hz		
	Typical Power Consumption	65 W		
OPTICAL	Colour Variants	RGBW (W: 4,500 K)	RGBA	WW (W: 3,000 K)
		Variaents On Request (2,500 K 2,700 K 3,000 K 3,500 K 4,000 K 5,000 K 6,500 K)		
	Beam Angle	Symmetrical: 9° 15° 30° 50° 65° 100°		
		Bisymmetrical: 10° x 30° 30° x 10° 10° x 60° 60° x 10° 35° x 70° 70° x 35° 15° x 90° 90° x 15°		
	Lumen Output Delivered	2,294 lm, RGBW @ 9°		
CONTROL	Projected Lumen Maintenance	60,000 hrs (L70 @ 25 °C / 77 °F)		
	Interface Protocol	USITT DMX512 RDM ArtNet MA-Net MA-Net2 sACN KingNet Wireless DMX (optional)		
	Control System	E-box Lite	E-box Delay	E-box Star
	Operating Modes	Pixel (12 LEDs) or Fixture mode		
	Connectivity	max. 32 pcs of Eminiere Inground 2		
	Width x Height x Length	Eminiere Inground 2		
PHYSICAL	Weight	19.7 kg 43.4 lbs (13.3 kg 29.3 lbs Eminiere Inground Fixture, 6.4 kg 14.1 lbs Install Sleeve)		
	Housing	High Pressure Extruded Aluminum Body, End Caps - Die-Cast Aluminum.		
	Finish Options	Stainless Steel Installation sleeve for pre-installation, Tempered Glass, Anti-Static optionally		
	Connections	Stainless Steel Flange Housing Standard Colour - Graphite Black (RAL 9011)		
	Adjustability	+/- 15° after installation		
	Protection Factor	IP68 / Suitable For Wet Locations		
	IK Rating	IK10		

EMINERE™ Remote 1 / 2 / 3 / 4

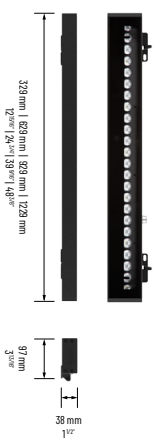

specifications

ELECTRICAL	Input Voltage	max. 48V		
	Typical Power Consumption	Emihere Remote 1	20 W	
		Emihere Remote 2	40 W	
		Emihere Remote 3	60 W	
OPTICAL	Colour Variants	Emihere Remote 4	80 W	
		RGBW (W - 6,500 K)	WW (W - 3,000 K)	
	Beam Angle	Symmetrical: 9° 15° 30° 50° 60° 70° 90° 100°		
		Bisymmetrical: 10° x 30° 10° x 10° 10° x 60° 60° x 10° 35° x 70° 70° x 35° 15° x 90° 90° x 15°		
Lumen Output Delivered	Wide Wallwasher	Wide Wallwasher		
Projected Lumen Maintenance	up to 4,588 lm (Emihere 4, RGBW @ 9°)			
CONTROL	Control System	Ac+Power series, Rack Unit		
	Operating Modes	Panel (12 LEDs) or Fixture mode		
	Power Supply	Remote		
		Emihere Remote 1	76 x 38 x 329 mm (2.99 x 1.5 x 12.95 in.)	
PHYSICAL	Width x Height x Length	Emihere Remote 2	76 x 38 x 629 mm (2.99 x 1.5 x 24.76 in.)	
		Emihere Remote 3	76 x 38 x 929 mm (2.99 x 1.5 x 36.57 in.)	
	Weight	Emihere Remote 4	76 x 38 x 1229 mm (2.99 x 1.5 x 48.38 in.)	
			1.4 kg 3.1 lbs	2.7 kg 6 lbs
Housing	High Pressure Extruded Aluminum Body, End Caps - Die-Cast Aluminum, Tempered Glass			
Finish Options	Standard Colour - Graphite Black (RAL 9011) Silver (RAL 9006)			
Cables / Connectors	Cast Option - Custom RAL Inert Environment (RAL 9016, RAL 9011)			
Protection Factor	IP67 Cable with quick lock connector			
IK Rating	IK06			



HEAD OFFICE

ROBE Lighting s. r. o.
Hazovice 2090
75661 Režnov
pod Radhoštěm
Czech Republic

FACTORY

ROBE Lighting s. r. o.
Palackého 416
757 01 Valasské Meziříčí
Czech Republic
Tel.: +420 571 751 500
Email: robe@robe.cz

March 2020 © ROBE Lighting s. r. o. All specifications subject to change without notice.

www.anolislighting.com