

ARCDOT™

Excellent for large scale matrix applications due to its advanced pixel mapping capabilities, the ArcDot™ uses a Cree MC-E RGBW MultiChip with high light output that features a built-in intelligent electronic control system. This guarantees flicker free operation and overheating protection whilst remote addressing, calibration and status messaging is also included. Built to an IP67 rating ensures the unit is capable of withstanding tough weather conditions but is also perfect for a wide variety of interior installations.



KEY FEATURES

Flicker free operation with advanced pixel mapping, remote addressing and status messaging with colour, lash and colour temperature options available.

Lumen Output & Light Source

Max. 139 lm | 1x Multichip

Projected Lumen Maintenance

50,000 hrs (L70)

Power Consumption

Typ. 5.5W

Physical (max WxHxD)

Ø77 x 71 mm - 0.2kg | Ø3.03 x 2.80in. - 0.44lbs | Cast Aluminium, Opaque Polycarbonate Dome

CONTROL & PROTOCOLS



STANDARD & SPECIFICATION



5 Year
Warranty
(Registered)

FINISH OPTION



Graphite
Black



Silver



Custom
Paint Colour

COLOURS



RGBW



RGBA



Pure
White

COLOUR TEMPERATURES

* UPON REQUEST



3.000 K



6.500 K*

OPTIC OPTIONS



No Optic
No Optics

ARCDOT SPECIFICATION


ELECTRICAL	Input Voltage	48 V
	Typical Power Consumption	5,5 W / 48 V
OPTICAL	Light Source	6 x 15 W Multichip LEDs
	Colour Variants	RGBW (W - 6500 K) RGBA PW (W - 3000 K)
	Beam Angle	Clear Glass
	Lumen Output Delivered	Clear Glass
	Projected Lumen Maintenance	60.000 hrs (L70 @ 25 °C / 77 °F)
CONTROL	Control System	ArcPixel Power, ArcPower Unit Pixel
	Power Supply	ArcPixel Power, ArcPower Unit Pixel
PHYSICAL	Width x Height	Ø 77 x 71 mm Ø 3.03 x 2.80 in.
	Weight	0.2 kg 0.44 lbs
	Finish Options	Standard Colour - Graphite Black (RAL 9011), Silver (RAL 9006)
		Cost Option - Custom RAL
	Housing	Cast Aluminium
		Polycarbonate Dome
	Cables / Connections	Li9Y11Y, 2 x AWG16 + 1 x AWG20, Chogori IP67 connector
	Mounting Method	Mounting Back Plate
	Protection Factor	IP67 / Suitable For Wet Locations
	IK Rating	IK07
	Cooling System	Convection
	Operating Ambient Temperature	-20 °C / +50 °C (-4 °F / +122 °F)
	Operating Temperature	+45 °C @ Ambient +40 °C (+113 °F @ Ambient +104 °F)
CERTIFICATION	Listings	ETL / cETL, CE, RoHS
ACCESSORIES		Cable Connection ArcDot
		Connector T- CGRBA (3-pin)
		Connector CGRBB-03BMMA-SL8001 (Male)
		Connector CGRBB-03BFFA-SL8001 (Female)
		Cable, w/out connectors (1m)
		Ferrite GTFC 16-8-16

PHOTOMETRIC OVERVIEW

Lumen Output (lm) - Clear Glass				
	RGBCW (6500 K)	RGBA	TW (5000 K)	PW (3000 K)
Flat Clear Glass	172	152	218	141
Frosted Dome	207	183	262	169
Opaque dome	139	123	176	114

DIMENSIONS

ArcDot

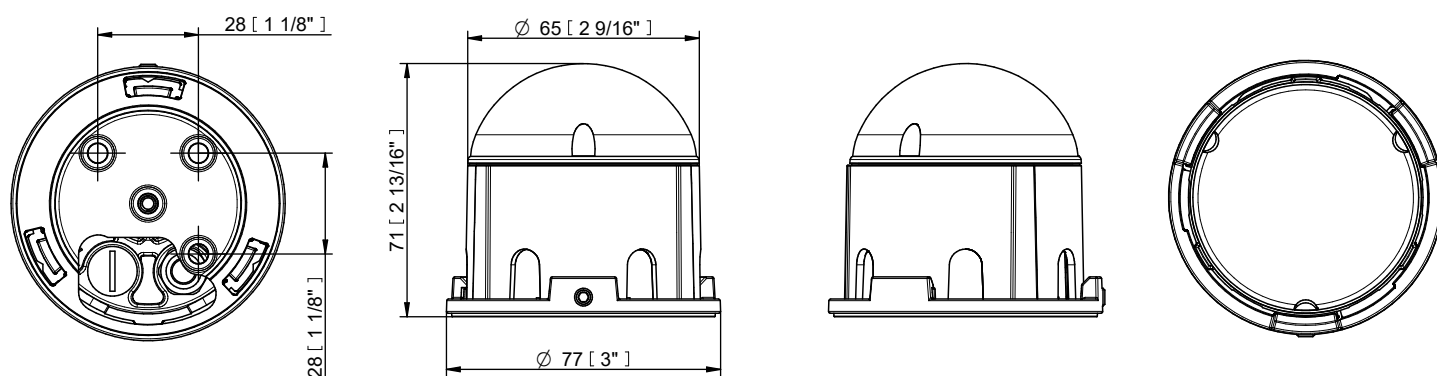

ACCESSORIES

Cable Connection ArcDot 1 / 5 / 10 m



Connector T- CGRBA (3-pin)



Connector CGRBB-03BMMA-SL8001 (Male)



Connector CGRBB-03BFFA-SL8001 (Female)



Terminator Active for Arc Dot




Terminator Passive for Arc Dot - terminal part of ArcDot connetion.



CONNECTION


ArcDots can be connected one by one with using connectors CGRBB-03BMMA-SL8001 and CGRBB-03BFFASL8001. T-connectors can be used in case if we need connect ArcDot indirectly one after another.

Example of connection

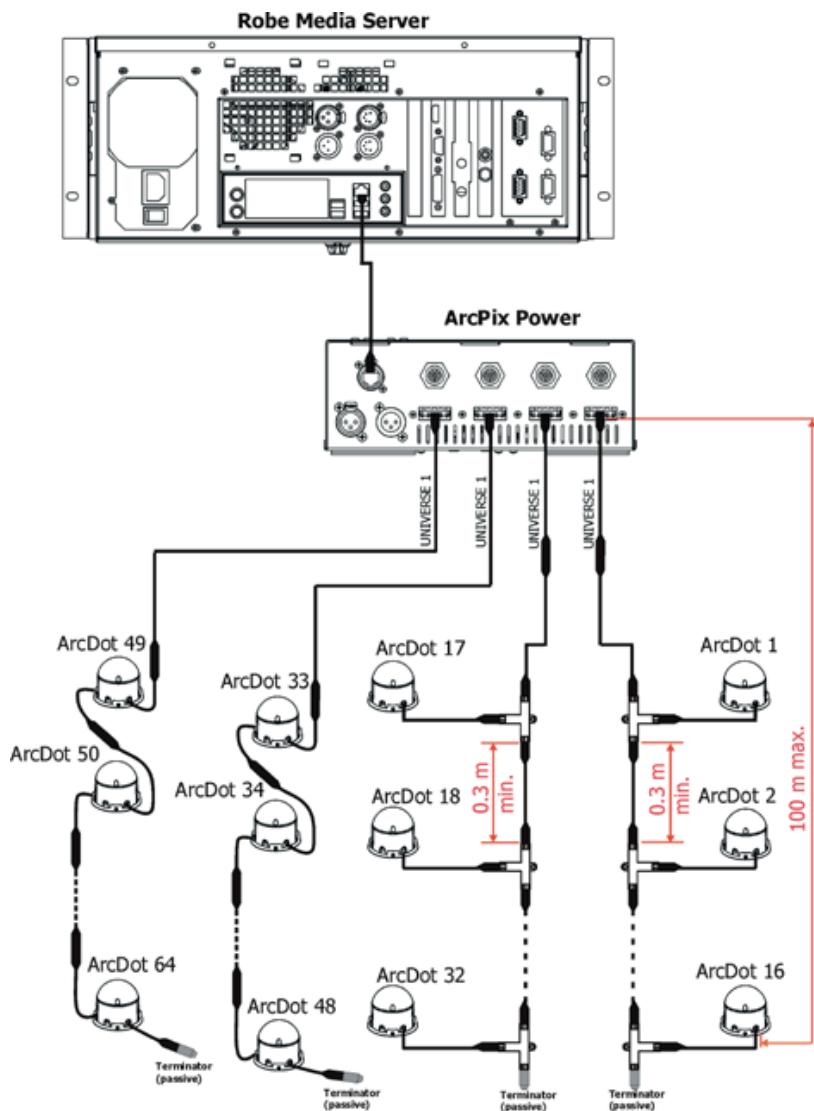

The minimum cable length of 0.3m between two T-connectors has to be kept in case that the pixel sorting is executed manually from the ArcPix Power menu.



This rule does not need to be kept if the Robe Media Server is used for pixel sorting.





Every ArcDot line has to be terminated with the passive terminator!

PHOTOMETRIC DATA

ArcDot RGBCW Flat-Clear Glass



ArcDot RGBCW Frosted dome



ArcDot RGBCW Opaque dome

