



Eminere<sup>®</sup>  
series

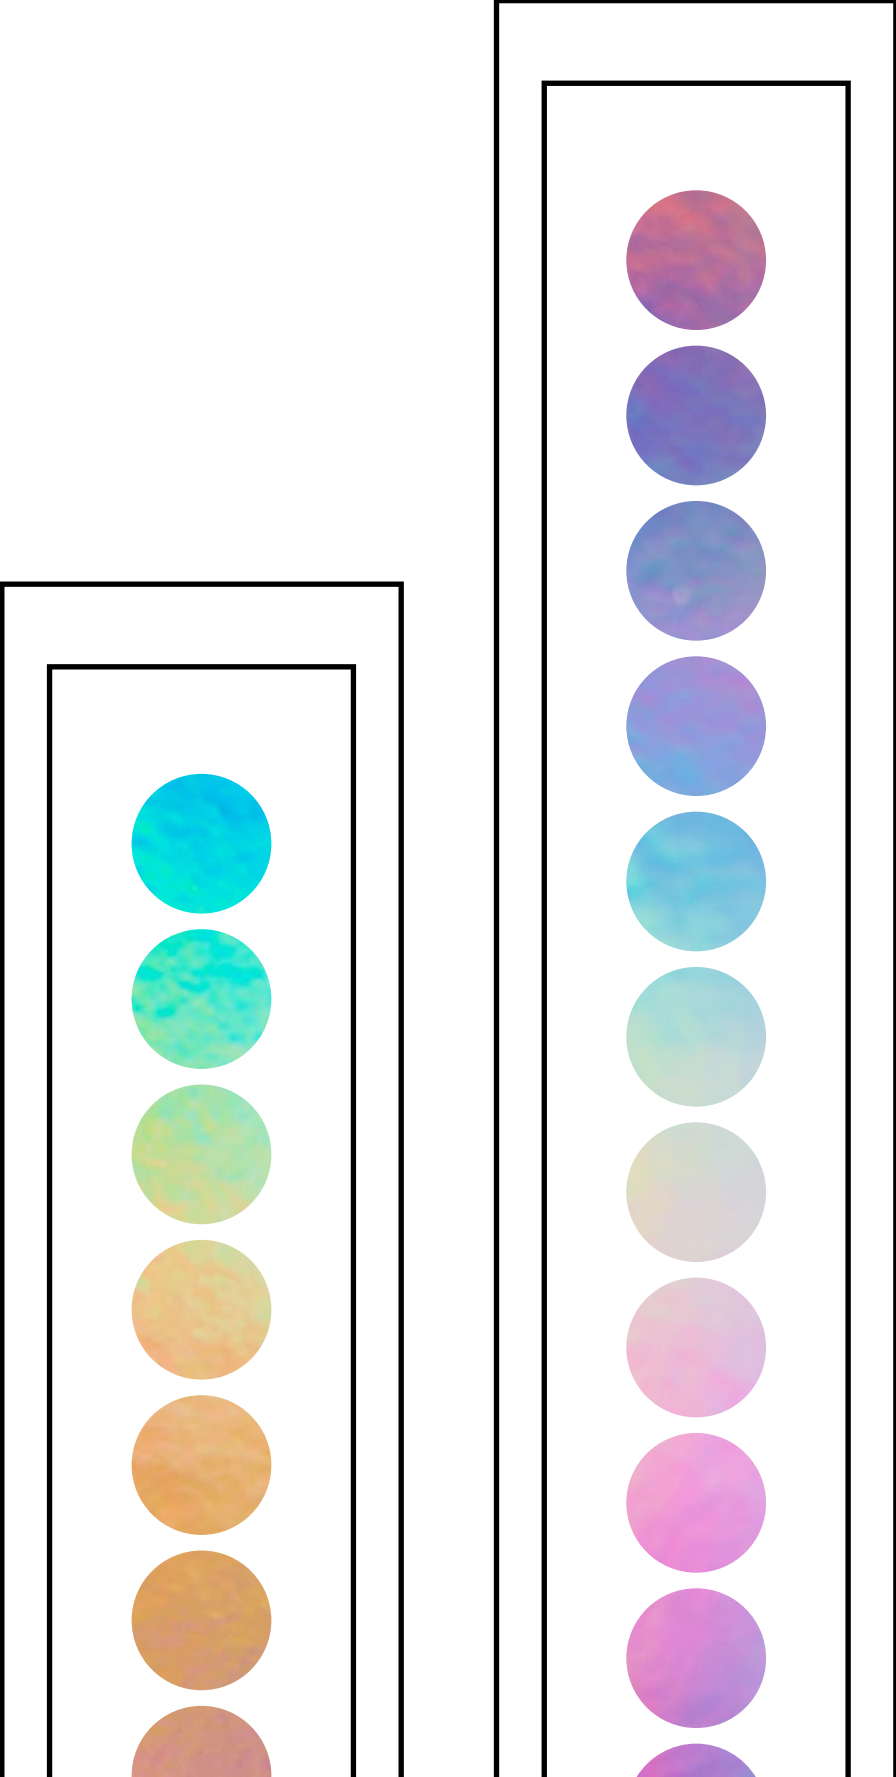

Anolis<sup>®</sup>  
A ROBE Business

# Eminere<sup>®</sup> series by Anolis<sup>®</sup>

Anolis designs and manufactures the highest quality LED architectural lighting. All products are designed in our state of the art R&D facility by industry experts. Our fixtures are extensively tested to ensure they perform perfectly in the environment they were designed for. Utilisation of the latest LED technology ensures low power consumption and long lumen maintenance intervals.

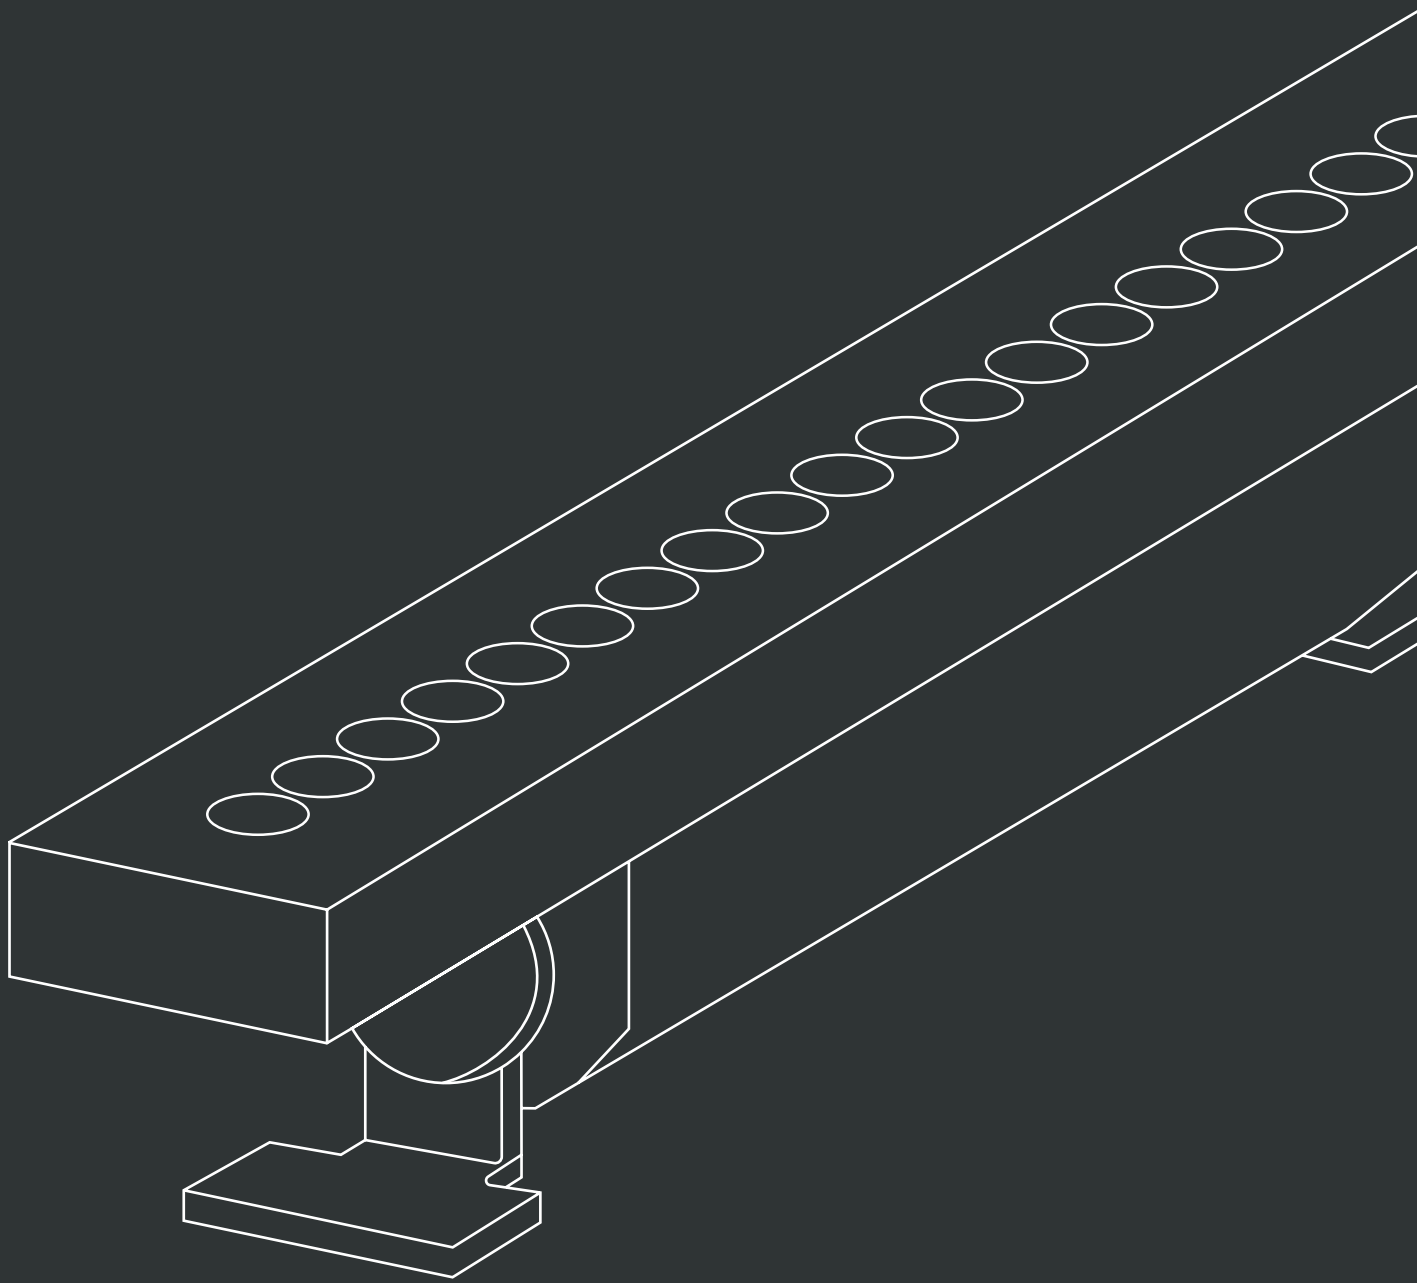

# Content

About	6
Design	10
Selections	18
Colour Mixing	26
Application flexibility	28
Durability	34
Connectivity	36
Products	40

Anolis Lighting  
Outdoor

Introduction

La Porte de Bourgogne, France

Eminere® 1

Eminere® 4

ArcSource™ Outdoor 48MC



Eminere® series



# Exclusive Lineup

The Eminere range by Anolis builds on the success of the original ArcLine Outdoor Series with precision optics and is available in a variety of sizes. It's perfect for a wide range of exterior and interior applications such as Flood Lighting, Wall Grazing, Wall Washing and Accent Lighting. Built to exact standards, these linear fixtures are durable enough to withstand extreme environments whilst producing beautiful colours from the RGBW, RGBA or PureWhite LED chips.



# Versatile w







# Vide Broad

# Design

Anolis luminaires are developed with an emphasis on performance, flexibility, durability, control, and last but not least, design ingenuity. While quality and simplicity are the main characteristics of our Eminere range, they are designed to maximize application functionality in a robust physical housing. Its carefully chosen materials, smooth connections and edges, and multiple colour finish options, make Eminere an ideal lighting solution.

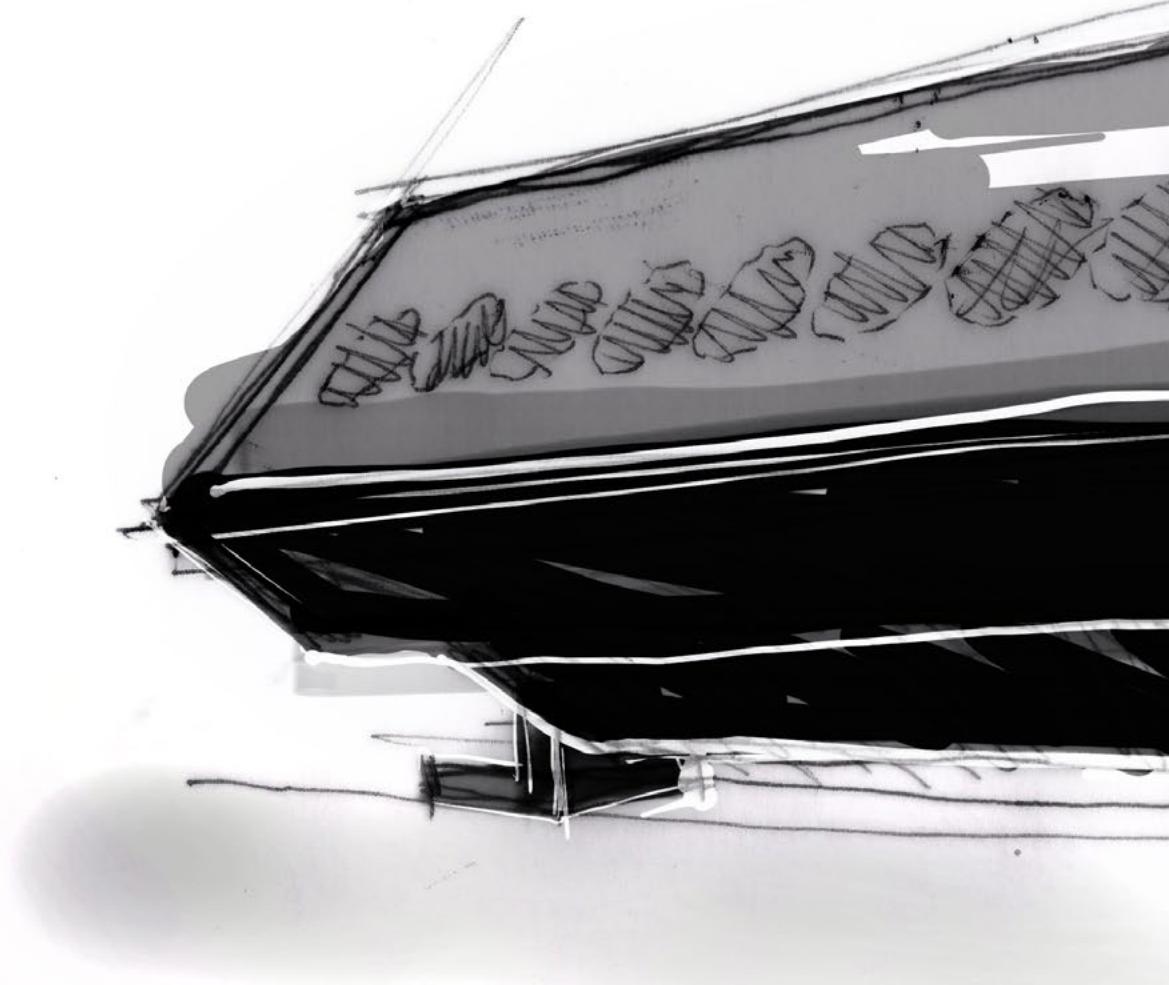

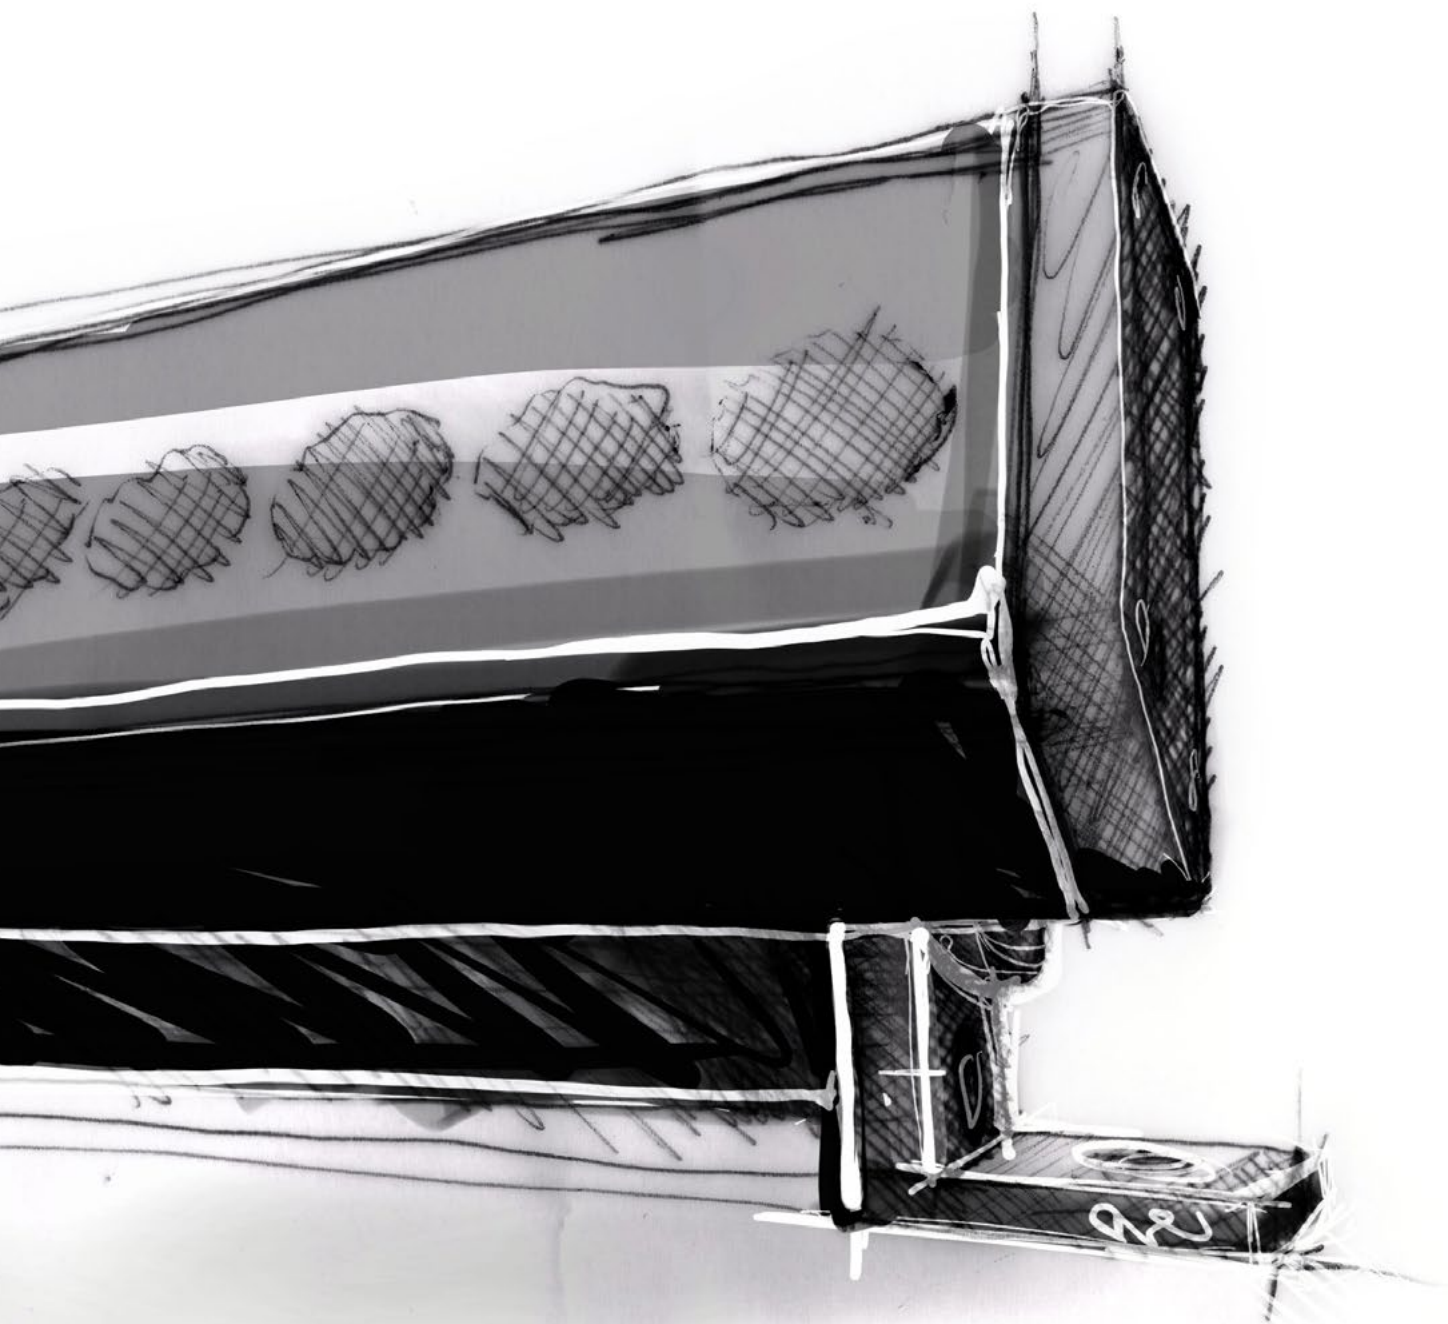

# Precision in all its colours

Architectural lighting has never been easier with linear LED fixtures designed to be the new industry standard. Eminere's flexibility offers designers a powerful tool to meet the most demanding scenarios of placement, environment, and light distribution. The ability to select specific LED chips across a wide range of colour temperatures combined with high-quality holographic filters delivers precise colour mixing and exceptional beam definition.





Château de Barr, France

Eminere® 4

Absolutely  
limitle $\infty$

Notre-Dame-du-Rosaire, France

Eminere® 2/3/4



# Notre-Dame-du-Rosaire

The façade of the famous Notre-Dame-du-Rosaire, Catholic shrine and minor basilica within the Sanctuary of Our Lady of Lourdes in southern France has a new Anolis lighting installation. The site is an international pilgrimage destination where the sick can reputedly be miraculously healed by the Lourdes water. Around 80 Anolis products from different ranges including Eminere 4 s, Eminere 3 s, Eminere 2 s, ArcSource Outdoor 16MC, Divine 160 s, Divine 72 s, ArcPar 150 Outdoors, s and ArcSource Outdoor 4MC Pixels are lighting the basilica's façade, arcades, crown, cross, belfries, stairs, square, statues and lectern.

LED fixtures were chosen for their longer lifespan, lower power consumption and reduced maintenance. Anolis was selected for the breadth of its range of colour changing luminaires – with multiple options needed to precision light the different areas of the façade – as well as the quality of the light output, the brand's reliability and robust build for the outdoor environment plus DMX controllability.

Notre-Dame-du-Rosaire, France  
-  
Eminere® 2/3/4



Design and Installation: BLEV  
Organisation and ACE EVENT.

# Façade as you wish

Green

Yellow

Yellow

White

Orange

Lime

Cyan

Gold

Pink

Coral

Red

Teal

Purple

Navy

Beige

Warm

Indigo

Aqua

Khaki

Blue

Gray

Linen

Azure





Blue

Green

Yellow

Azure

White

Orange

Lime

Cyan

Gold

Pink

Coral

Red

Teal

Purple

Navy

Beige

Teal

Indigo

Aqua

Khaki

Teal

Gray


Linen

with  
Eminere<sup>®</sup>



# Selections


## Lengths

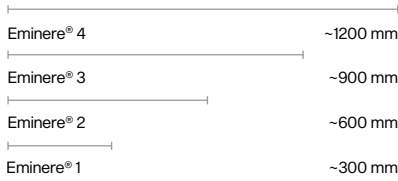


## Light Colours




## Colour Temperature for SC Versions




## Colour Temperature for MC Versions




## Finish Options

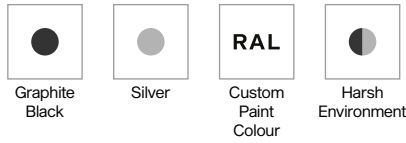




## Standard & Specification

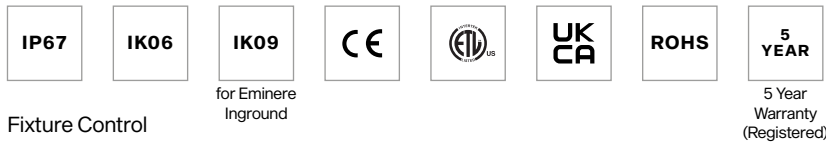



## Fixture Control




## Optic Options for SC Versions




## Optic Options for MC Versions









Eminere<sup>®</sup> 4 | 76 × 1229 mm




Eminere<sup>®</sup> 1 | 76 × 329 mm




Eminere<sup>®</sup> 3 | 76 × 929 mm




Eminere<sup>®</sup> 2 | 76 × 629 mm




Eminere<sup>®</sup> Remote 4 | 113 × 1229 mm




Eminere<sup>®</sup> Remote 1 | 113 × 329 mm




Eminere<sup>®</sup> Remote 3 | 113 × 929 mm




Eminere<sup>®</sup> Remote 2 | 113 × 629 mm

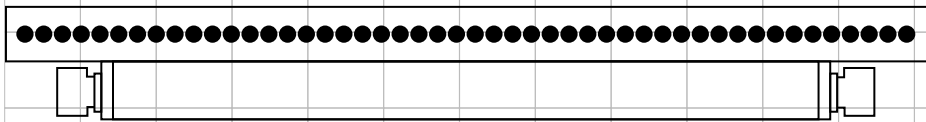


Eminere<sup>®</sup> Side 4 | 148 × 1229 mm




Eminere<sup>®</sup> Side 1 | 148 × 329 mm

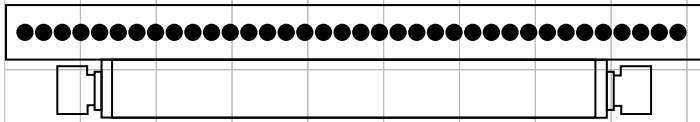


Eminere<sup>®</sup> Side 3 | 148 × 929 mm




Eminere<sup>®</sup> Side 2 | 148 × 629 mm

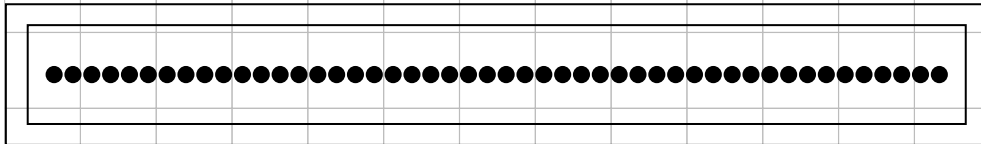


Eminere<sup>®</sup> Inground 4 | 186 × 1307 mm

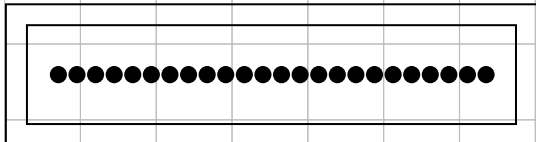


Eminere<sup>®</sup> Inground 2 | 186 × 707 mm




Eminere<sup>®</sup> Inground 1 | 186 × 407 mm




UVinere<sup>™</sup> Remote 4 | 113 × 1229 mm




UVinere<sup>™</sup> Remote 2 | 113 × 629 mm




UVinere<sup>™</sup> Remote 1 | 113 × 329 mm




UVinere<sup>™</sup> UV 4 | 76 × 1229 mm




UVinere<sup>™</sup> UV 2 | 76 × 629 mm



Eminere® 4 MC | 76 × 1219 mm




Eminere® 1 MC | 76 × 329 mm




Eminere® 3 MC | 76 × 914 mm




Eminere® 2 MC | 76 × 610 mm




Eminere® 4 Remote MC | 76 × 1219 mm





Eminere® Remote 1 MC | 76 × 329 mm



Eminere® 3 Remote MC | 76 × 914 mm





Eminere® 2 Remote MC | 76 × 610 mm



# Optical Performance Eminere MC

The multi-chip version of the Eminere enhances its versatility with additional colour mixing capabilities. It supports a variety of beam spreads, from 12° all the way up to 100° symmetrical, and also Bi-symmetrical beams. The multi-chip setup enables the creation of dynamic lighting effects with rich, saturated colours. This version also benefits from a high-power LED design that ensures consistent and vibrant illumination across different applications, including colour-changing effects for building exteriors and architectural features. With a robust build and long operational life, the multi-chip Eminere is ideal for projects requiring both durability and superior optical performance.

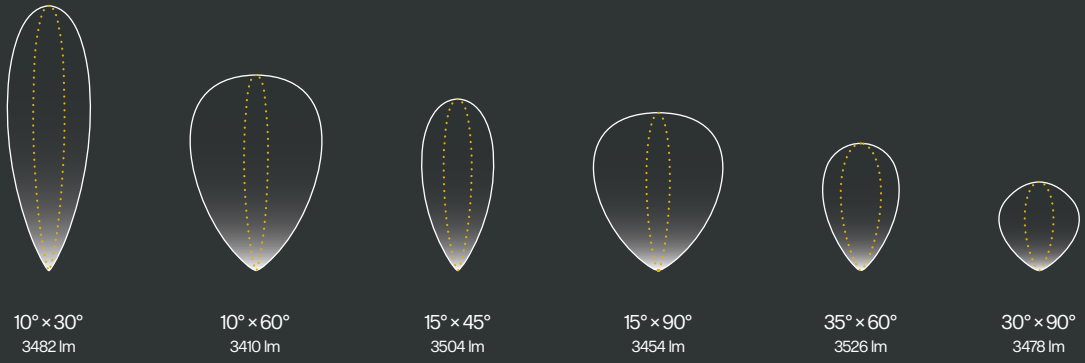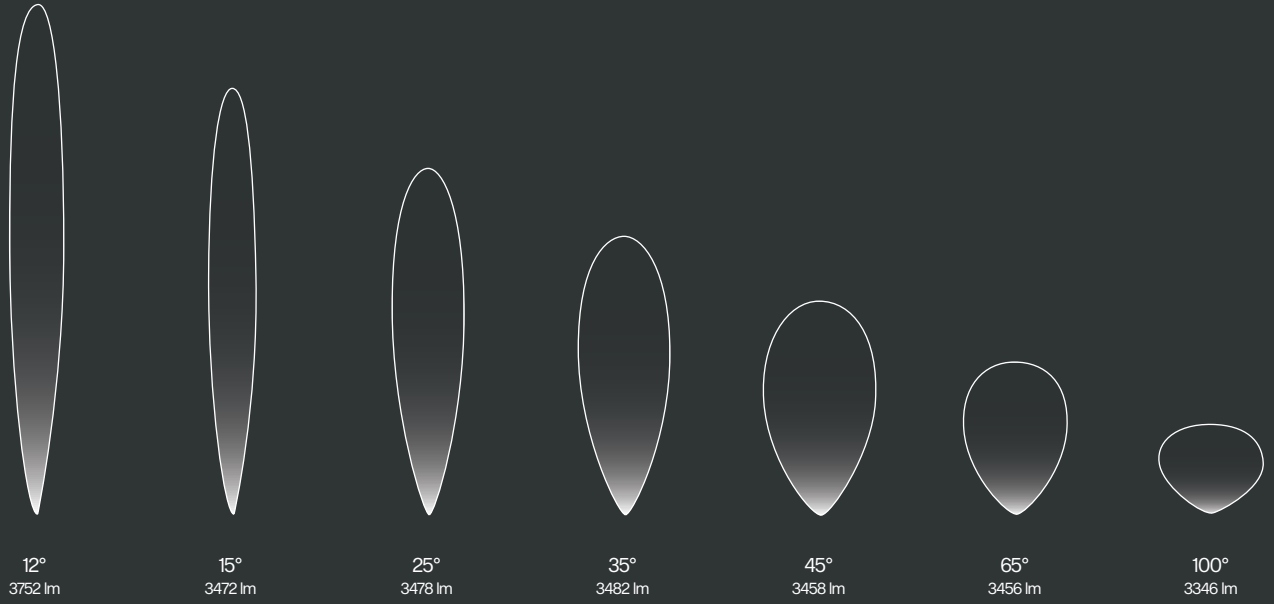

# Optical Performance Eminere SC

The single-chip version of the Eminere luminaire offers an impressive range of optical options, ensuring precise and high-quality lighting for various applications. It features a selection of beam angles from narrow 9° beams to wide 100° spreads, also Bi-symmetrical and asymmetrical beams enabling it to cater to different lighting needs. The high-power LEDs deliver homogenized light output with excellent color consistency, making it suitable for architectural illumination, including flood lighting, wall grazing, and wall washing. These LEDs are designed for a lifetime of over 90,000 hours, providing long-lasting performance in demanding environments.





9°  
4588 lm



15°  
3912 lm



30°  
4184 lm



50°  
4156 lm




65°  
4160 lm




100°  
3984 lm




10° × 30°  
4128 lm



10° × 60°  
3748 lm



15° × 90°  
3880 lm



35° × 70°  
4160 lm



Wallwasher  
3806 lm



Wide Wallwasher  
3416 lm

# Colour Mixing Eminere SC

The Eminere series offers a full spectrum of colours with the latest technology standards such as 18-bit resolution for stepless colour fades, amber-shift for sunrise / sunset emulation, internal CTO or green colour correction channel. Specifically designed glass printings help improve colour mixing and blend all LEDs into the desired hue.

## Head2Head

Fixtures installed right next to each other create absolutely perfect colour and intensity overlap which helps outputted light hit surfaces in the desired colour tone.




# Stand Alone

Specially designed glass printing to achieve optimal colour mixing and intensity distribution. No matter which colour pallet is chosen, output is always perfectly consistent and balanced from one side to the other.



# Application Flexibility Eminere SC

Lighting design can be challenging and the result is dependent on the right application. Consider textured materials for wall grazing, homogenised output and uniform coverage for wall washing, picking up contours or specific passages for accent lighting and flood lighting is ideal for places that are not always easy accessible.

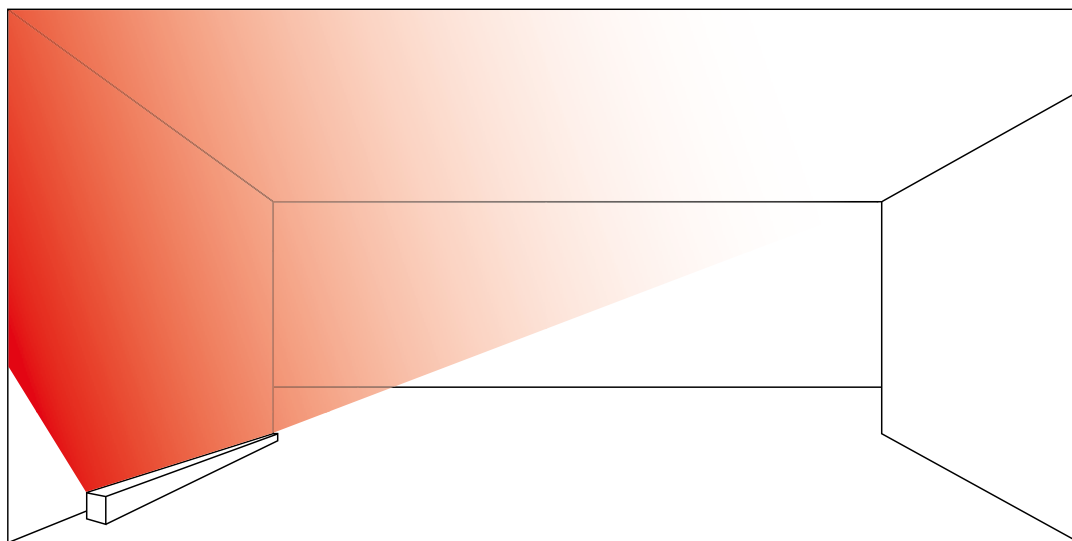



## Flood Lighting

Using flooding optics gives flexibility to illuminate large areas with minimum fixture positioning requirements. Thinking about bridge arcades, giant walls or tunnels illumination? Flood lighting will be the right solution for you.

30°, 50°, 65°, 100°

Spacing: distance between head of luminaires  
 Setback: distance from the wall to luminaire  
 Av. illuminance: average illuminance on the wall  
 min/av.: minimum value of illuminance on the wall  
 average value of illuminance on the wall.

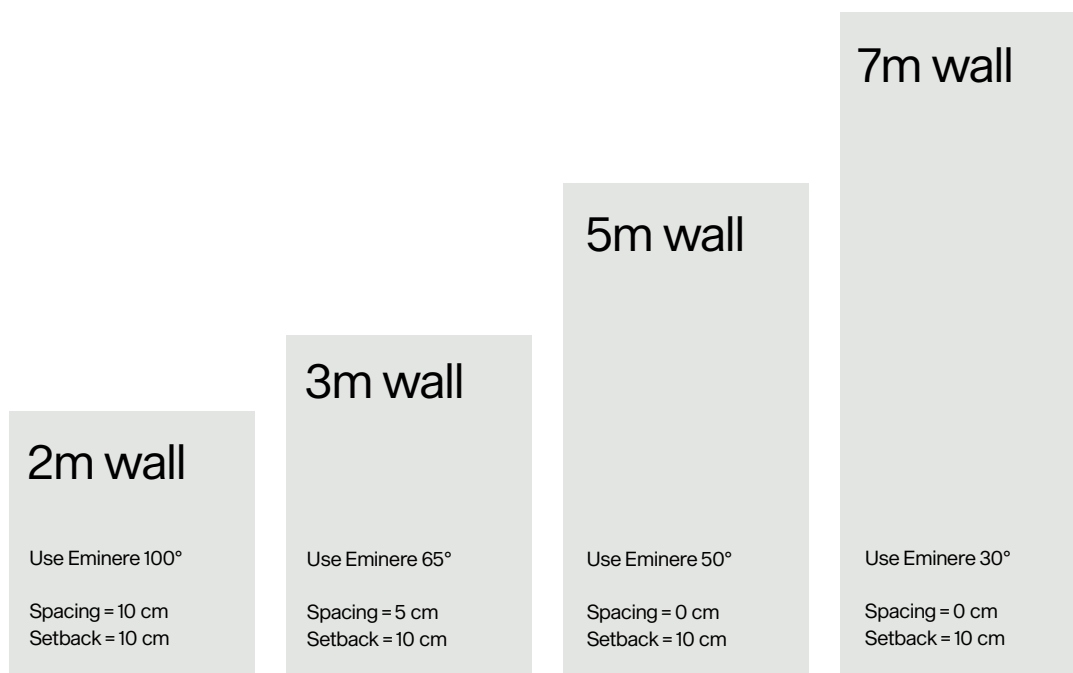

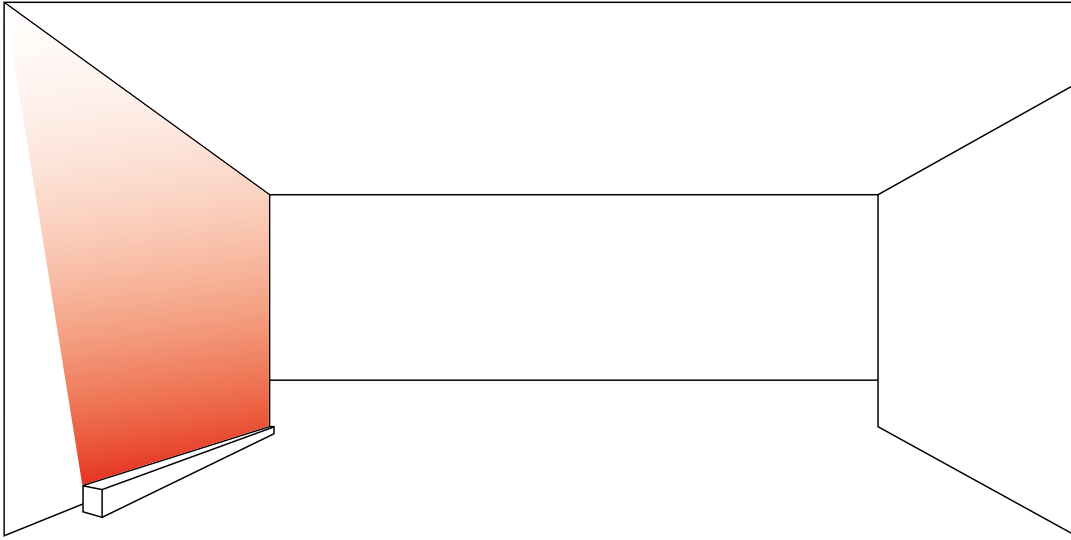

## Wall Grazing

Place fixture close to the surface and let it highlight the texture of the illuminated material. Grazing is an ideal method to bring out every single detail and create a very natural look.

9°, 15°, 10° × 30°, 10° × 60°,  
15° × 90°, 35° × 70°

### 2m wall

Use Eminere 15° × 90°  
30° × 60°

Spacing = 10 cm  
Setback = 10 cm

### 3m wall

Use Eminere 10° × 60°

Spacing = 5 cm  
Setback = 10 cm

### 5m wall

Use Eminere 10° × 30°

Spacing = 0 cm  
Setback = 10 cm

### 7m wall


Use Eminere 15°

Spacing = 0 cm  
Setback = 10 cm

### 10m wall

Use Eminere 9°

Spacing = 0 cm  
Setback = 10 cm

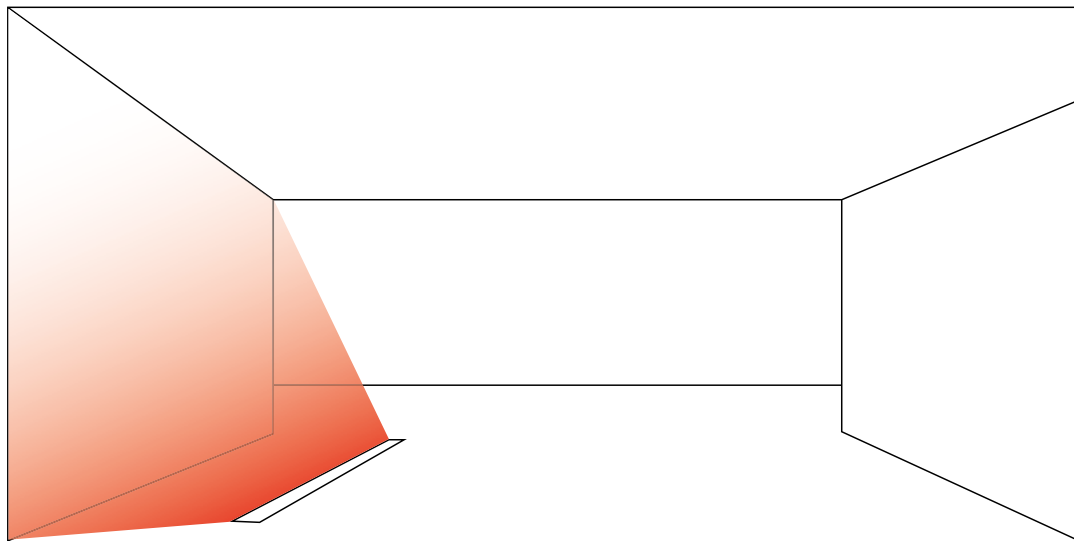

# Wall Washing

Having distance between the fixture and the surface allows an even application of light that gives the surface texture a flat appearance.


## Wall Washer Wide Wallwasher

2m wall	3m wall	5m wall	7m wall	10m wall
Use Eminere Wide Wallwasher	Use Eminere Wide Wallwasher	Use Eminere Wallwasher	Use Eminere Wallwasher	Use Eminere Wallwasher
Spacing = 65 cm Setback = 55 cm Av. illuminance: 650 lx (min/av. = 0,40)	Spacing = 150 cm Setback = 90 cm Av. illuminance: 300 lx (min/av. = 0,39)	Spacing = 40 cm Setback = 80 cm Av. illuminance: 400 lx (min/av. = 0,24)	Spacing = 90 cm Setback = 120 cm Av. illuminance: 257 lx (min/av. = 0,28)	Spacing = 90 cm Setback = 170 cm Av. illuminance: 160 lx (min/av. = 0,33)
Use Eminere Wide Wallwasher	Use Eminere Wide Wallwasher	Use Eminere Wide Wallwasher	Use Eminere Wide Wallwasher	Use Eminere Wide Wallwasher
Spacing = 65 cm Setback = 55 cm Av. illuminance: 650 lx (min/av. = 0,40)	Spacing = 150 cm Setback = 90 cm Av. illuminance: 300 lx (min/av. = 0,39)	Spacing = 350 cm Setback = 135 cm Av. illuminance: 107 lx (min/av. = 0,37)	Spacing = 390 cm Setback = 180 cm Av. illuminance: 75 lx (min/av. = 0,30)	Spacing = 450 cm Setback = 235 cm Av. illuminance: 50 lx (min/av. = 0,37)

# Further Reduce Light Pollution

Anolis Lighting's Eminere Barndoor Accessories are essential tools for precise light control, enhancing the versatility and effectiveness of Eminere architectural LED luminaires. These accessories are designed to shape and direct the light output, preventing unwanted light spill and creating sharp, defined edges. The barndoors for Eminere luminaires are manufactured from high quality materials to ensure durability and reliability in a variety of environments. They are easy to install and adjust, allowing quick customisation to meet the specific lighting needs of any project. Notably, the barndoor accessories are optimised for single chip versions, ensuring maximum performance and compatibility.



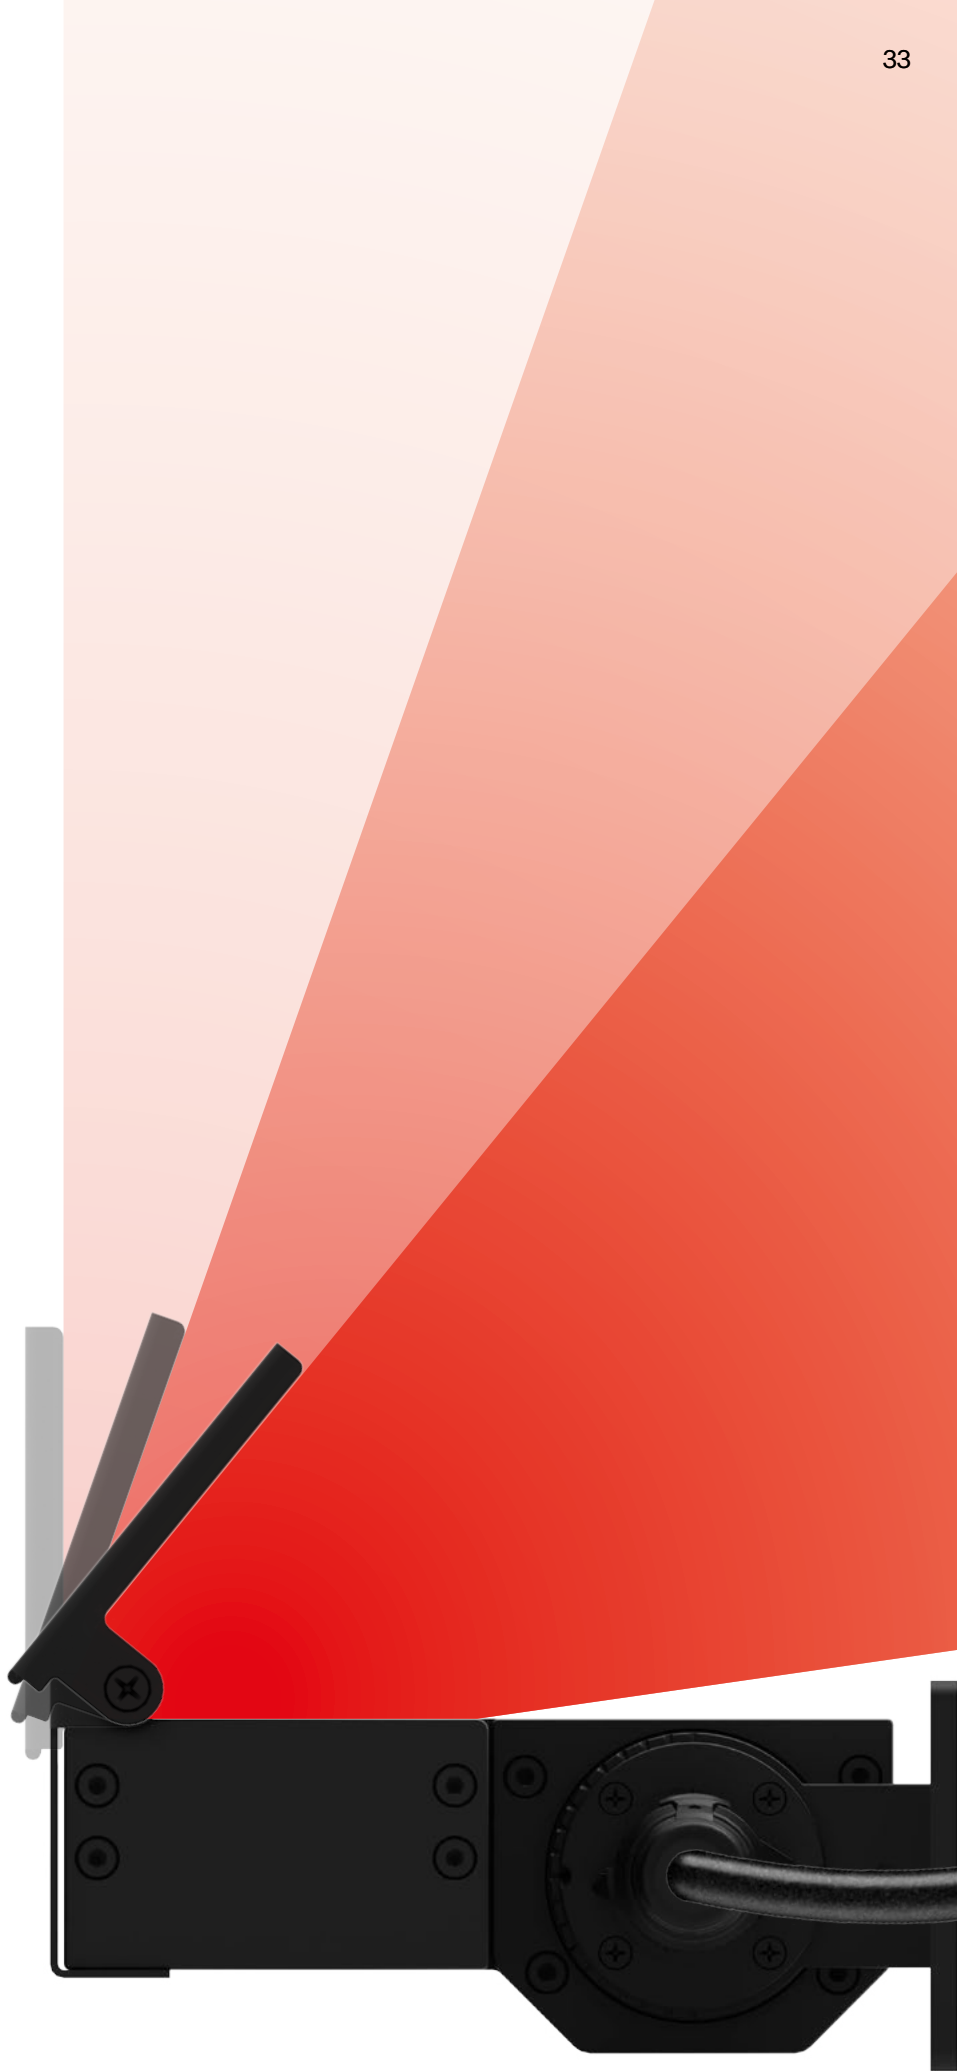

# Will it survive?

Every member of the Eminere series is equipped with the latest technology to meet market standards and the high expectations of lighting designers. Its classified ingress protection of IP67 declares usability in wet locations, and vibration testing allows use of the Eminere series in high traffic areas and on bridges. A special coating means Eminere fixtures can withstand marine or harsh conditions, and the Inground models have an IK9 rating with anti-skid options available. All Eminere luminaires are tested for extreme operating temperatures and come with a 5-year limited customer warranty.



Outdoor usage

IP67 rated fixtures suitable for wet locations

Vibration standards for bridge applications

meets IEC 60598-1 and 3G ANSI C136.31

Extreme temperatures

-20 °C to +40 °C (-4 °F to +104 °F) operating temperatures

Warranty for 5 years

with LED lifespan over 90 000 hours (L90B10, Ta = 25°/77 °F)

Harsh environment

Suitable for salt spray environments and extreme outdoor applications.



Yes.

# click





# Connection on one click

The entire Eminere series was designed for both detail and simplicity, with key benefits for installers and system integrators including fast, efficient, and error free wiring and connection. Click-on connectors ensure that everything goes together safely and quickly and makes it simple to remove and replace fixtures for maintenance. Long runs with large quantities of fixtures are facilitated via a wide range of AC mains voltages and various options for cable topology including daisy chain and star configurations. Custom-made, IP67 rated factory molded combination power and data cables and IP67 panel connectors provide maximum protection against water ingress under all circumstances, even when a cable is unplugged.

Anolis Lighting  
Outdoor

Eminere®  
series

Notre Dame du Rosaire, France

—  
Eminere® 2  
Eminere® 3  
Eminere® 4






# Eminere<sup>®</sup> series




Product  
Type

Product Overview  
Page Number




Eminere® MC

40–41



Eminere®

42–43



Eminere® Side

44–45


# Eminere<sup>®</sup> MC



Eminere was designed by Anolis for a wide range of exterior and interior applications with a variety of lens options that can be used for flood lighting, wall grazing, wall washing and accent lighting. Equipped with Anolis' unique 18-bit colour mixing resolution ensures extra fine colour tuning as well as smooth dimming at low level of intensity. Designed in our state of the art R&D facility by industry experts. Eminere is IP67 rated and can withstand extreme conditions. Eminere is available in 1, 2, 3, and 4 foot sizes (300/600/900/1200 mm) with RGBW, RGBA or PureWhite multi chips as standard and is easy to control, 1 pixel per foot. Eminere fixtures can be used for both permanent and temporary installations, including various architectural and archtainment applications.



Scale

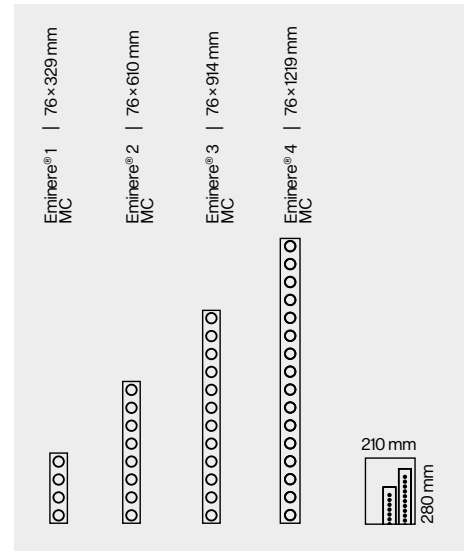


- Quick and Easy Installation** Plug & Play system means easy installation, fast adjustment and intuitive programming with self-addressing.
- Durability** Eminere is rated IP67, suitable for wet locations and has a protection rating of IK06. Marine grade finish option available for harsh environmental conditions (on request).
- Application Flexibility** Eminere's optics can be used for various applications including wall grazing, flood lighting, wall washing, wide flood lighting, spot lighting and accent lighting.
- Naturally Looking Result** Full spectrum coverage by using RGBW colour mixing with precise wavelengths of each colour for modern architecture or specifically designed combination of RGBA to highlight every single detail of historical buildings or monuments.


Product Variant




Finish Options

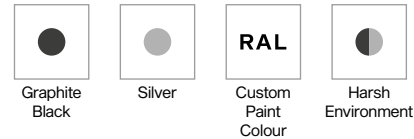


Optic Options

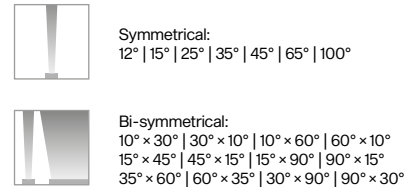

Control & Protocols



Standards and Certifications

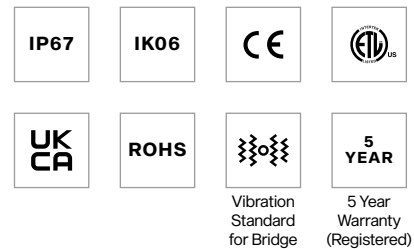


# Eminere<sup>®</sup>



Eminere was designed by Anolis for a wide range of exterior and interior applications with a variety of lens options that can be used for flood lighting, wall grazing, wall washing and accent lighting. Equipped with Anolis' unique 18-bit colour mixing resolution ensures extra fine colour tuning as well as smooth dimming at low level of intensity. Designed in our state of the art R&D facility by industry experts. Eminere is IP67 rated and can withstand extreme conditions. Eminere is available in 1, 2, 3, and 4 foot sizes (300/600/900/1200 mm) with RGBW, RGBA or PureWhite single chips as standard and is easy to control, 1 pixel per foot. Eminere fixtures can be used for both permanent and temporary installations, including various architectural and architainment applications.



Scale

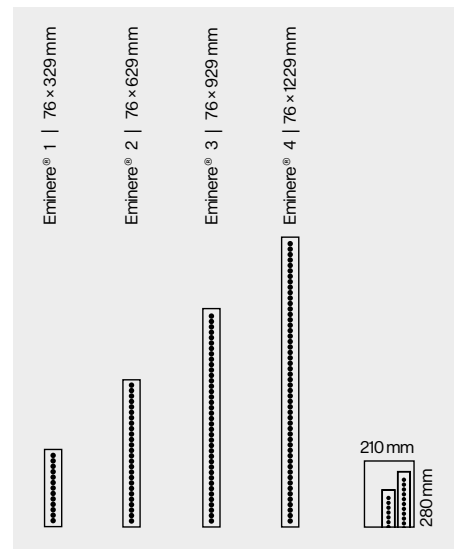

Quick and Easy Installation

Plug & Play system means easy installation, fast adjustment and intuitive programming with self-addressing.

Durability

Eminere is rated IP67, suitable for wet locations and has a protection rating of IK06. Marine grade finish option available for harsh environmental conditions (on request).

Application Flexibility

Eminere's optics can be used for various applications including wall grazing, flood lighting, wall washing, wide flood lighting, spot lighting and accent lighting.


Naturally Looking Result

Full spectrum coverage by using RGBW colour mixing with precise wavelengths of each colour for modern architecture or specifically designed combination of RGBA to highlight every single detail of historical buildings or monuments. Output up to 1147 lm (RGBW) or 1652 lm (PW) per one foot of Eminere.



Product Variant



Finish Options

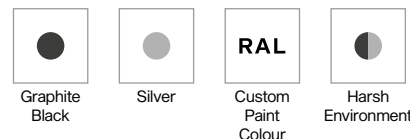


Optic Options



Control & Protocols



Standards and Certifications

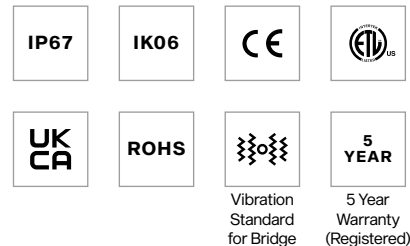


# Eminere<sup>®</sup> Side



Eminere Side is specifically designed for applications where a low form factor is required whilst keeping installation of the luminaire neat and clean. With only 76 mm in height, it keeps all of the Eminere series strengths. Wide range of optics options, durability, connectivity, application flexibility make this luminaire ideal solution for flood lighting, wall grazing, wall washing and accent lighting.



Scale

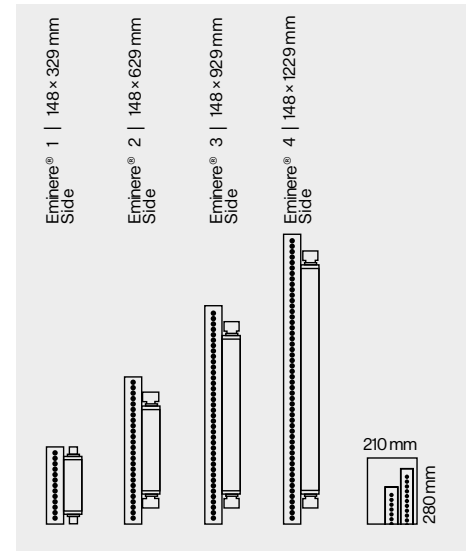

Quick and Easy Installation

Easy and quick installation using click-on connectors overmoulded on combo cable (Power + Data).

Durability

High durability of IK06 in combination of ingress factor IP67.

Application Flexibility

Complete solution for illuminating buildings, monuments, walls, statues, bridges, coves, arches and much more. With PSU on its side, Eminere Side is only 76 mm in height.


Optics & Colours

Wide range of optics allows to place product anywhere needed with no limitation. Full spectral LEDs selection with custom option on request. Output up to 1147 lm (RGBW) or 1652 lm (PW) per one foot of Eminere.


Product Variant



Finish Options

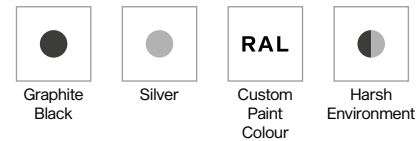


Optic Options

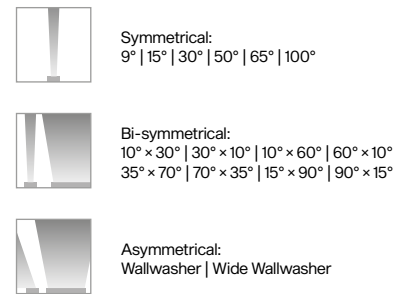

Control & Protocols



Standards and Certifications

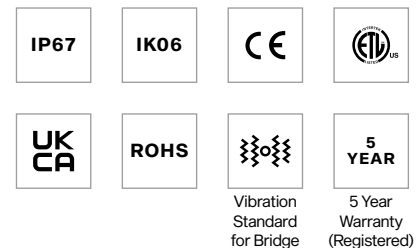


# Eminere<sup>®</sup>

# Inground series



Product  
Type

Product Overview  
Page Number



Eminere® Inground

48–49


# Eminere<sup>®</sup> Inground



Eminere Inground is a robust luminaire designed to be installed into the ground. A stainless steel installation sleeve provides rust protection as well as "armour" for the Eminere fixture itself. Overall, Eminere Inground comes with an IP67 protection factor, standard or Anti-skid glass, and as always, perfect colour mixing. With  $\pm 15^\circ$  tilt adjustment, precision optics with wide range of beam angles and colour variants, inground version of the Eminere luminaire is great choice for an exterior applications such as flood lighting, wall grazing, wall washing and accent lighting.



Scale

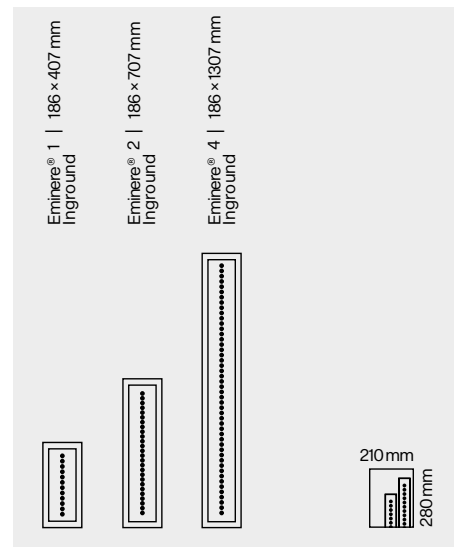

- Application** Anti-skid glass option for pedestrian areas application. Easy to install into soft and hard ground.
- Light Source** Full spectral LEDs selection with custom option on request. Output up to 2019 lm for Eminere Inground 2 RGBW. Long LED lifetime over 90 000 hrs. Manually adjustable tilt  $\pm 15^\circ$  for fine adjustment of light beam.
- Durability** High durability with ingress factor of IP67 and walkover housing made from stainless steel with welded support for highest durability requirements.

Product Variant



Finish Options



Optic Options



Symmetrical Clear Glass:  
9° | 15° | 30° | 50° | 65° | 100°  
Symmetrical Anti-Skid Glass:  
18° | 22° | 35° | 50° | 65° | 100°



Bi-symmetrical Clear Glass:  
10° x 30° | 10° x 60° | 15° x 90° | 35° x 70°  
Bi-symmetrical Anti-Skid Glass:  
20° x 35° | 20° x 65° | 20° x 90° | 40° x 70°




Asymmetrical:  
Wallwasher | Wide Wallwasher

Control & Protocols




Standards and Certifications

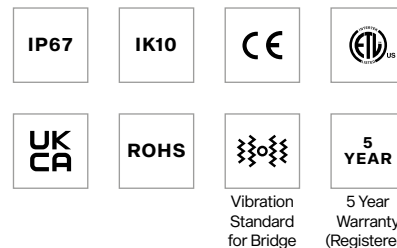

# Eminere<sup>®</sup> Remote series


Product  
Type

Product Overview  
Page Number



Eminere® Remote MC

52–53



Eminere® Remote

54–55


# Eminere<sup>®</sup> Remote MC



The member of the Eminere product range, Eminere Remote MC extends our series of linear architectural fixtures into further application possibilities using only low voltage for higher safety restrictions. Available in four sizes, ranging from 1 to 4 feet, Eminere Remote MC follows the identical optical and performance features of our other established and proven Eminere fixtures. Design-wise, Eminere Remote MC brings all of today's technology into an elegant and slim body, but is still very robust with an IP67 rating to withstand the harshest environments.



Scale

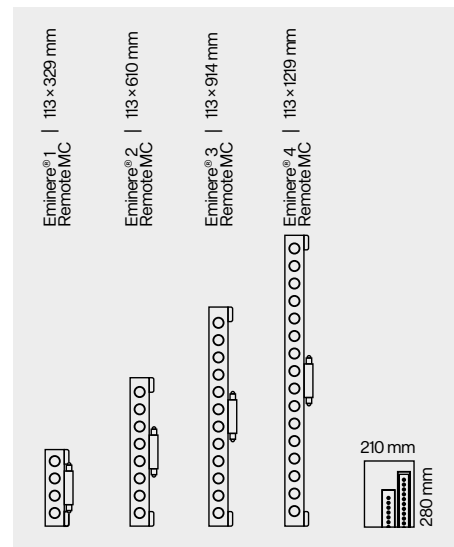

**Optic & Control** Output up to 938 lm (RGBW) per one foot of Eminere. With a wide range of optics for limitless fixture applications, Eminere Remote MC can also be operated in pixel (4 MC LEDs) or fixture modes, and its low-input voltages allow the luminaire to be used in applications with higher safety restrictions.


**Compact Design** The Eminere Remote MC is one of the thinnest lighting solution in our Eminere series and has been designed as a compact and slim LED luminaire suitable for any low-profile application.

**Durability** Thanks to its tempered glass and high-pressure, extruded aluminium housing, Eminere Remote MC is IK06 and IP67 certified. For more extreme and marine applications, a harsh environment finish option is also available.


Product Variant



Finish Options

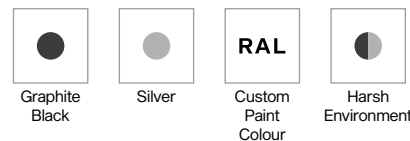


Optic Options

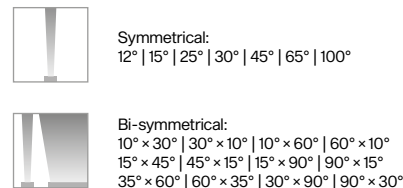

Control & Protocols



Standards and Certifications

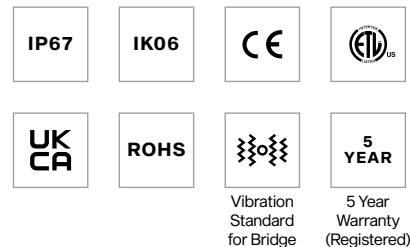

# Eminere<sup>®</sup> Remote




The newest member of the Eminere product range, Eminere Remote extends our series of linear architectural fixtures into further application possibilities using only low voltage for higher safety restrictions. Available in four sizes, ranging from 1 to 4 feet, Eminere Remote follows the identical optical and performance features of our other established and proven Eminere fixtures. Design-wise, Eminere Remote brings all of today's technology into an elegant and slim body, but is still very robust with an IP67 rating to withstand the harshest environments.





Scale

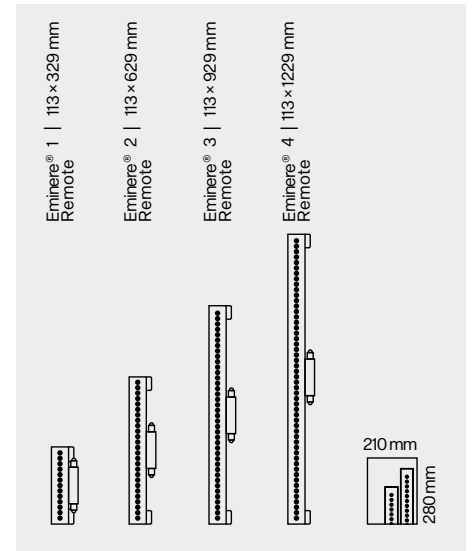

**Optic & Control** Output up to 1147 lm (RGBW) or 1652 lm (PW) per one foot of Eminere. With a wide range of optics for limitless fixture applications, Eminere Remote can also be operated in pixel (12 LEDs) or fixture modes, and its low-input voltages allow the luminaire to be used in applications with higher safety restrictions.


**Compact Design** At only 39 mm of total height, Eminere Remote is the thinnest lighting solution in our Eminere series and has been designed as a compact and slim LED luminaire suitable for any low-profile application.

**Durability** Thanks to its tempered glass and high-pressure, extruded aluminium housing, Eminere Remote is IK06 and IP67 certified. For more extreme and marine applications, a harsh environment finish option is also available.


Product Variant




Finish Options

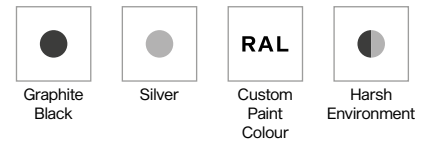


Optic Options

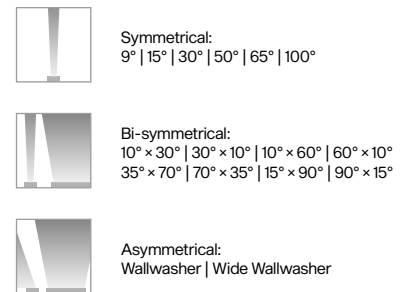

Control & Protocols




Standards and Certifications

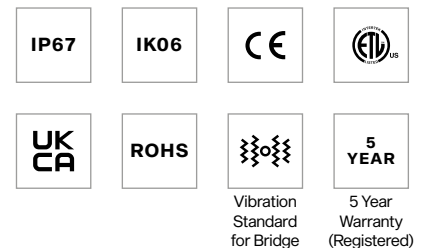

# UVinere™ series


Product  
Type

Product Overview  
Page Number



UVinere™

58–59



UVinere™ Remote

60–61


# UVinere™



An excellent solution for theme parks and entertainment venues where an attention grabbing UV effect is required, UVinere produces a true black light effect. Available in 2-foot or 4-foot models, UVinere evenly distributes UV output with a wavelength of 365 nm for a wide range of installations and designs. Utilising a powered E-Box, control for the UVinere is made possible over DMX (wired or wireless) or Ethernet protocols. Consistent with the design quality of the entire Anolis product portfolio, the UVinere range is robust and extremely durable with IP67 and IK06 ratings.



Scale

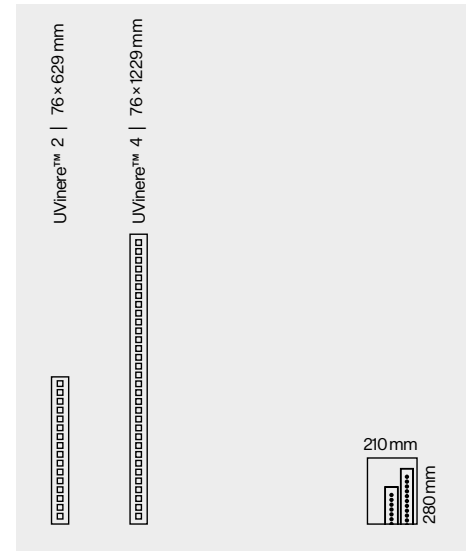

**Optic & Control** With a wavelength of 365 nm, UVinere provides UV black light using 10 000 hrs lifetime LEDs which can be powered by E-Box, and utilises DMX (wired or wireless) or ethernet protocols for control.

**Physical** UVinere is available in two physical models; 2-foot and 4-foot LED luminaires. This fixture is easily installed with the simplicity of a “plug and play” connection.

**Durability** Robust and durable, UVinere fulfills both IP67 and IK06 certification, backed by a 2 year warranty.

Product Variant



UV

Finish Options



Graphite Black



Silver



RAL  
Custom Paint Colour



Harsh Environment

Optic Options



Optical version: 24°



Non-optical version: 92°

Control & Protocols



VIA E-BOX



WIRELESS DMX

Optional

Standards and Certifications



IP67



IK06



CE



UKCA



ROHS



Vibration Standard for Bridge



2 YEAR

2 Year Warranty


# UVinere™ Remote



An excellent solution for theme parks and entertainment venues where an attention-grabbing UV effect is required, UVinere Remote produces a true black light effect. Available in 1-foot, 2-foot or 4-foot models, UVinere Remote evenly distributes UV output with a wavelength of 365 nm for a wide range of installations and designs. Utilising a powered E-Box Remote, control for the UVinere Remote is made possible over DMX (hard-wired or wireless) or Ethernet protocols. Consistent with the design quality of the entire Anolis product portfolio, the UVinere Remote range is robust and extremely durable with IP67 and IK06 ratings.



Scale

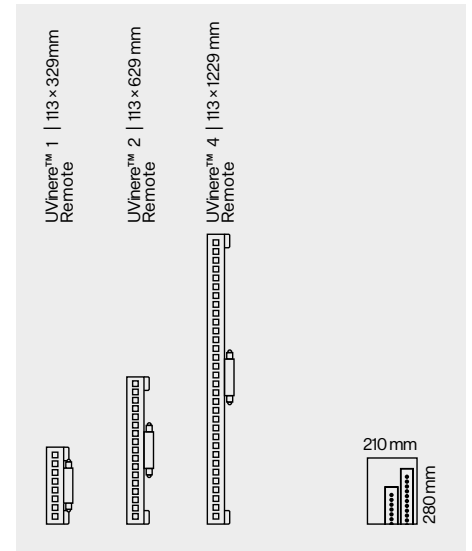

**Optic & Control** With a wavelength of 365 nm, UVinere Remote provides UVA black light using 10 000 hrs lifetime LEDs which can be powered by E-Box Remote range and utilises DMX (wired or wireless) or ethernet protocols for control.

**Physical** UVinere Remote is available in three physical models; 1-foot, 2-foot and 4-foot LED luminaires. At only 39 mm of total height, UVinere Remote is suitable for any low-profile application.

**Durability** Robust and durable, UVinere Remote fulfills both IP67 and IK06 certification, backed by a 2 year warranty.

Product Variant



UV

Finish Options



Graphite Black



Silver



Custom Paint Colour



Harsh Environment

Optic Options



Optical version: 24°



Non-optical version: 92°

Control & Protocols



Optional

Standards and Certifications



Vibration Standard for Bridge




2 Year Warranty





Eminere® 4 Inground  
Calumma™ S



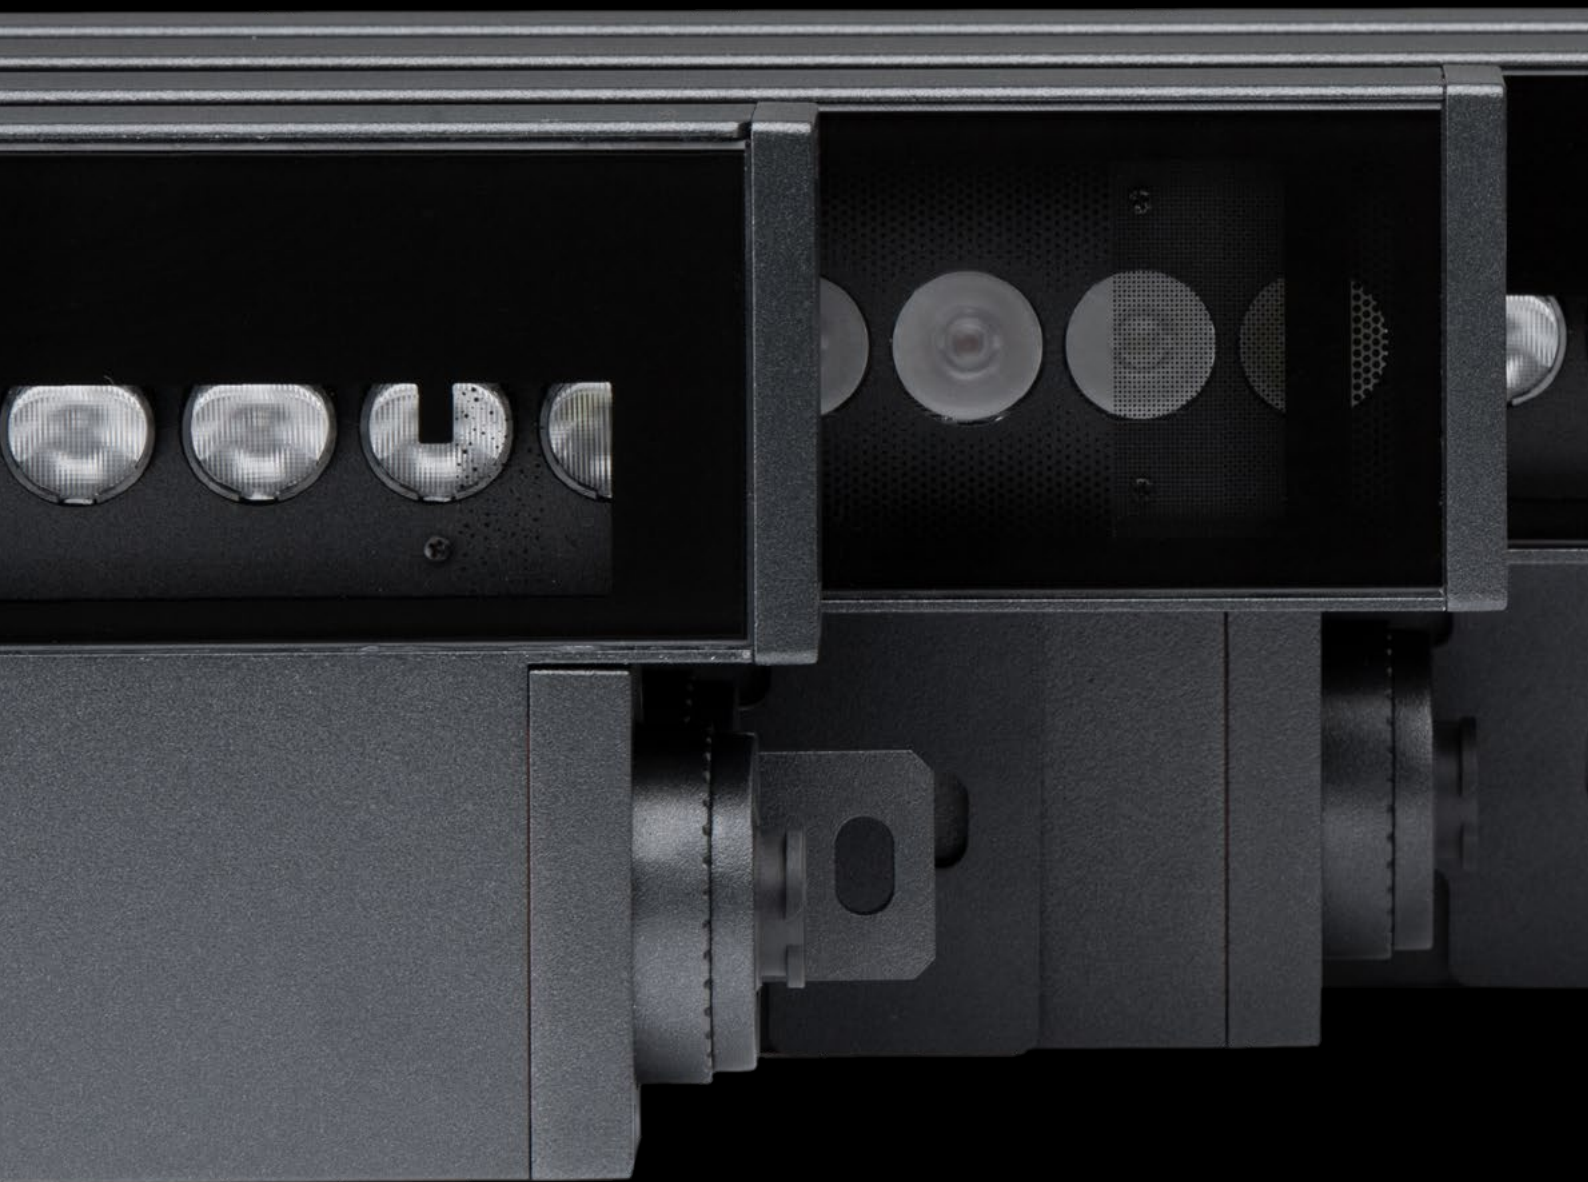

Eminere<sup>®</sup> series



www.anolislighting.com

info@anolis.eu  
+420 571 751 500

**Head Office**

Anolis  
Hážovice 2090  
756 61 Rožnov pod Radhoštěm  
Czech Republic

**Factory**

Anolis  
Palackého 416  
757 01 Valašské Meziříčí  
Czech Republic

Graphics, composition  
KNOW HOW solutions s.r.o.

Issue  
EN 08/2024

© 2024 Anolis  
All specifications subject to change without notice.



