


AMBIANE® POWER RACK

The Ambiane Power Rack provides remote powering of our Ambiane LED luminaires in an elegant and orderly installation using well-organised rack cases. Integrating 8 power supplies which can feed 8 Ambiane luminaires with full temperature control, the Ambiane Power Rack is suitable for less ventilated areas or locations, and its easy output connections via terminal blocks makes installation easy to complete.

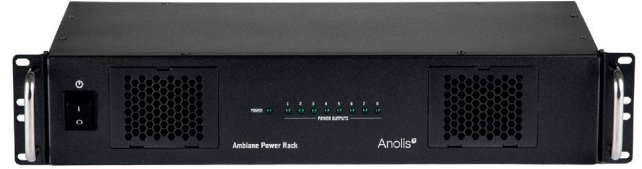

KEY FEATURES

Physical

Ambiane Power Rack is available in Rack-mount or Wall-mount version, it has a long service life thanks to its fan-cooling system with replaceable air filters.

Connectivity

Its able to power 8 luminaires with up to 75 m of cable length and 200 W for each output.





STANDARD & SPECIFICATION

FINISH OPTIONS

*CLOSEST RAL TONE

Graphite Black RAL 9011*	Grey Aluminium RAL 9007	Custom Paint Colour

DIMENSIONS

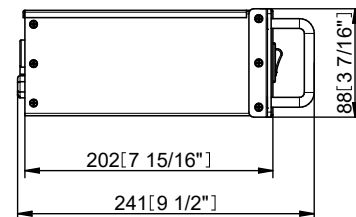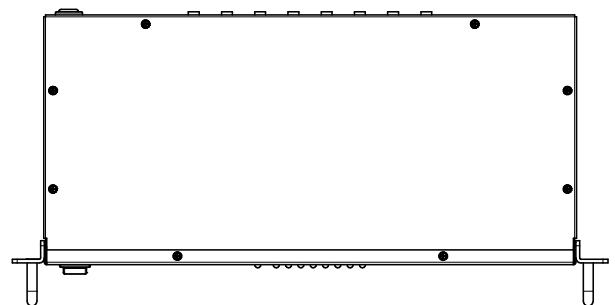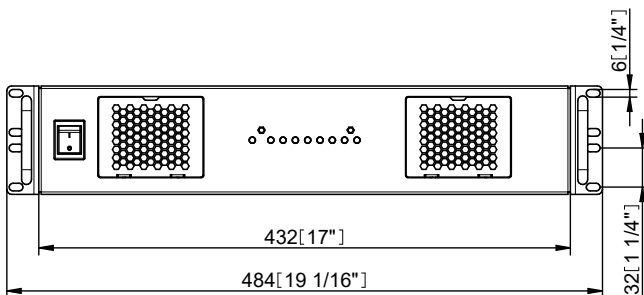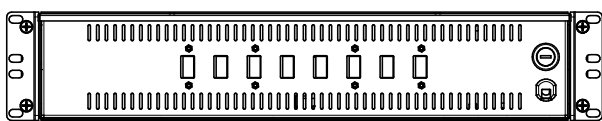

SPECIFICATION

ELECTRICAL	Input Voltage	CE: 100 – 240V AC 50/60 Hz	US: 100 – 277V AC 50/60 Hz
	Maximal Power Consumption	1350W	
	Output Voltage	48 V DC	
	Outputs	8	
	Max. Load per output	200W	
	Max. Total Load	1200W	
	Power Supply	Integrated	
PHYSICAL	Length x Height x Depth Weight	484 (432) x 88 x 241 (202) mm / 19.05 (17) x 3.46 x 9.48 (7.95) in. 5.4 kg (11.9lbs)	
	Housing	Rack Standard - 2U or Wall Mounted Brackets	
	Finish Options	Standard Colour - Graphite Black RAL 9011 , Grey Aluminium RAL 9007	
		Cost Option - Custom RAL	
	Cables / Connections	8 x Terminal Block (DC power Out)	
		1x Main Power Cord (w/plug; CE/US)	
	Mounting Method	Designed to Rack Box Installation	
	Protection Factor	IP20 / Dry locations only	
Cooling System	Fan Cooled		
Operating Ambient Temperature	-20 °C / +40 °C (-4 °F / +104 °F)		
CERTIFICATION	Listings	ETL / cETL, CE, RoHS , UKCA	