

CALUMMA™ REMOTE S SC

Featuring an optical design using nineteen high efficacy singlechip LEDs and available with optional LED colour variants and various beam angles, the small-sized Calumma Remote S SC luminaire creates powerful and beautiful light output for a spot, accent or flood lighting solution. Its durable housing is built to withstand any exterior conditions, and its special finish for harsh and marine environments provides an exceptional outdoor LED luminaire in an elegant design. Complemented by wide range of accessories, control protocols and connection options, this luminaire is an effective and versatile unit to get the most out of architectural lighting applications.



KEY FEATURES

Lumen output & Light source

Luminaire with nineteen high-power, single-chip LEDs provides up to 1958 lumen output (@10°, RGBW). Multiple LED colour variants. No light spills. Well homogenised light output with great efficacy up to 65 lm/w.

Design & Durability

Compact, durable and stylish housing made of high-pressure die cast aluminium. IP67 and IK10 certification; suitable for marine applications (Harsh Environment Finish required) and traffic applications. Supported with a 5 year warranty.

Flexibility


Exceptional outdoor or indoor LED luminaire with a wide range of accessories, custom colour finishes, multiple light output variants and beam angles.

COLOURS


* UPON REQUEST



CONTROL & PROTOCOLS




STANDARD & SPECIFICATION

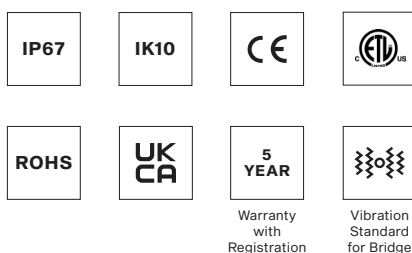


FINISH OPTIONS

* CLOSEST RAL TONE
* HE = Harsh Environment

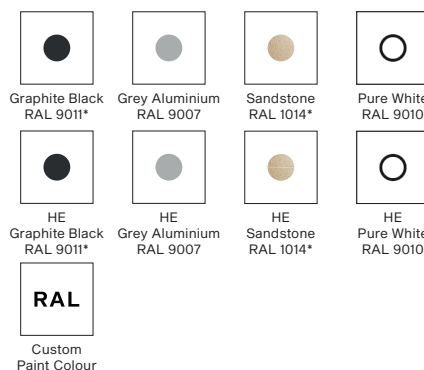


COLOUR TEMPERATURE

* UPON REQUEST

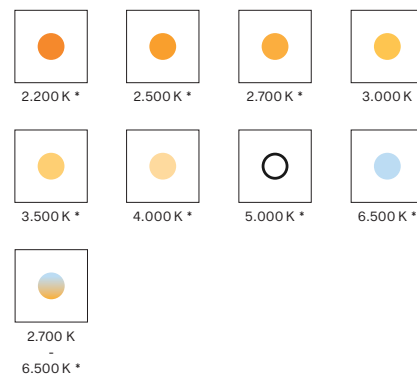


OPTIC OPTIONS

SYMMETRICAL

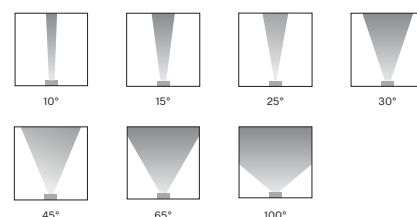

BI-SYMMETRICAL

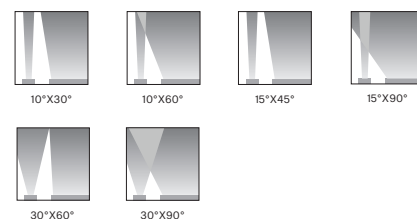

SPECIFICATION


ELECTRICAL	Input Voltage	48 V	
	Typical Power Consumption	30 W +/-10 %	
OPTICAL	Light Source	High Power Single Chip LEDs	
	Colour Variants	RGBW (W - 6500 K) RGBA PW (W - 3000 K)	
		Other Variants On Request (TW (2700 - 6500 K), 2200 K, 2500 K, 2700 K, 3500 K, 4000 K, 5000 K, 6500 K)	
	Beam Angle	10° 15° 25° 30° 45° 65° 100°	
		10°x30° 30°x10° 10°x60° 60°x10° 15°x45° 45°x 15° 15°x90° 90°x15° 30°x60° 60°x30° 30°x90° 90°x30°	
	Lumen Output Delivered	1958 lm (@ 10°, RGBW)	
CONTROL	Projected Lumen Maintenance	L90B10 >90.000 hrs, Ta = 25°C / 77°F	
	Interface Protocol	Via E-box Remote, E-box Remote Basic or E-Box Remote Basic Mini	
	E-Box Remote control protocol	USITT DMX512/RDM, ArtNet, MA Net, MA Net2, sACN, Kling-Net	
	Settings / Addressing	Via Two Row LCD Display with Control Buttons on E-Box Remote or RDM communicator	
	Power Supply	Via E-Box Remote range	
PHYSICAL	Width x Height x Depth	189 x 196 x 119 mm (7.4 x 7.7 x 4.7 in.)	
	Weight	3.45 kg 7.6 lbs	
	Housing	High Pressure Die-Cast Aluminium Body	
		Tempered Glass	
	Finish Options	Standard Colour	Graphite Black RAL 9011 Grey Aluminium RAL 9007 Pure White RAL 9010 Sandstone RAL 1014
		Standard Colour Harsh Environment	Graphite Black RAL 9011 Grey Aluminium RAL 9007 Pure White RAL 9010 Sandstone RAL 1014
		Cost Option	Custom RAL
	Cables / Connections	IN - 1 m cable with bare end - Other cable length - custom - Junction box - optional	
	Mounting Method	Yoke or Yoke for Pole Adaptor	
	Adjustability	+180° / -180°	
	Protection Factor	IP67 / Suitable For Wet Locations	
	IK Rating	IK10	
	Cooling System	Convection	
	Operating Ambient Temperature	-20 °C / +50 °C (-4 °F / +122 °F)	
CERTIFICATION	Listings	ETL / cETL, CE, RoHS, UKCA	
ACCESSORIES	Not Included Items	Junction Box Remote (1x or 4x Output)	
		Cable UL20969 5x AWG20 (black or white) - Calumma Remote input cable	
		Cable SJTW 5x AWG14 (black or white) - main connection between Junction Boxes	
		Re-enterable Electrical Insulating Resin	
		Land Spike for Calumma S	
		Optical Demo Set for Calumma S (for demo purposes)	
		Outdoor Foil Holder for Calumma S „OFH“ version only (for permanent installation)	
		Optical Foil Set for Outdoor Foil Holder Calumma S	
		Top Hat Calumma S	
		Half Top Hat Calumma S	
		Floor Stand for Calumma S, M	
		Tenon Adaptor	
		Pole Adaptor (ø 102mm) (Yoke for Pole Adaptor Required)	

PROJECTED AREA

	Front (rear) - m²	Front (rear) ft²	Side - m²	Side - ft²	Top - m²	Top - ft²
Calumma S	0,023	0,250	0,019	0,207	0,018	0,196
with Top Hat	0,023	0,250	0,027	0,290	0,027	0,290
with Half Top Hat	0,023	0,250	0,022	0,232	0,027	0,290

DIMENSIONS


Standard Yoke

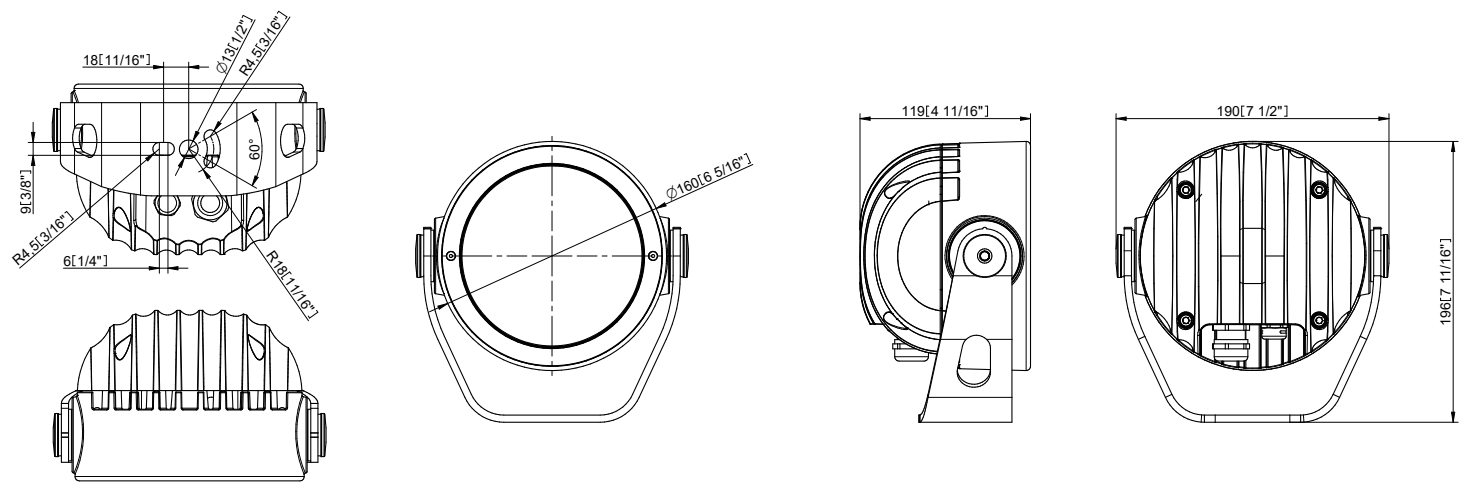

ACCESSORIES


Yoke for Pole Adaptor (with Pole Adaptor / PA)

Example of ordering code: Calumma Remote S SC RGBCW 15° PA

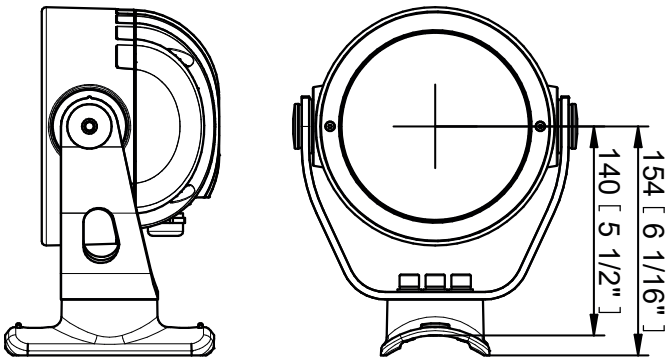


Outdoor Foil Holder for Calumma S „OFH“ version only (for permanent installation)


Example of ordering code: Calumma Remote S SC CE RGBCW 10° RAL9007 OFH

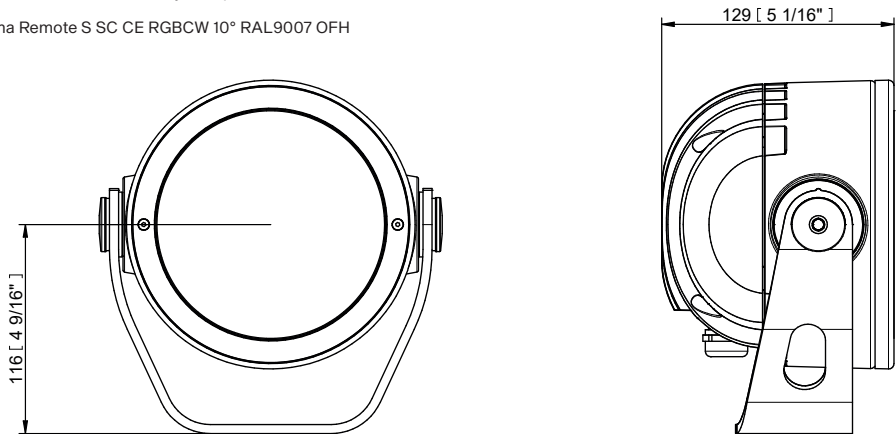

Outdoor Foil Holder for Calumma S

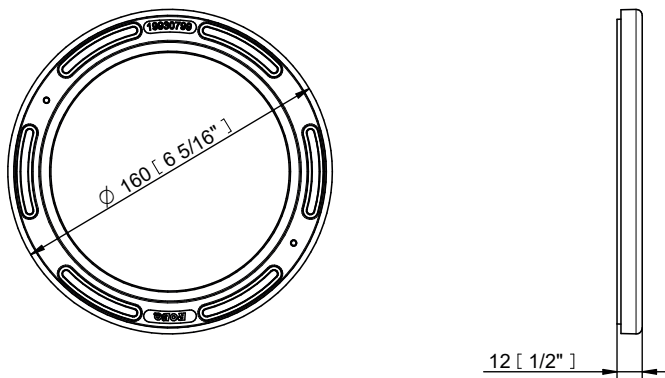


Land Spike for Calumma (S, M, L, XL)

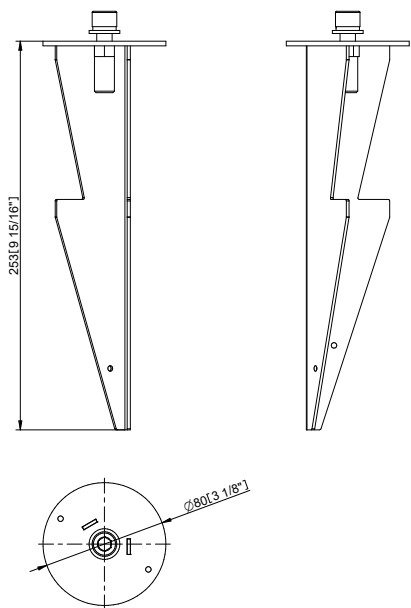


ACCESSORIES


Top Hat

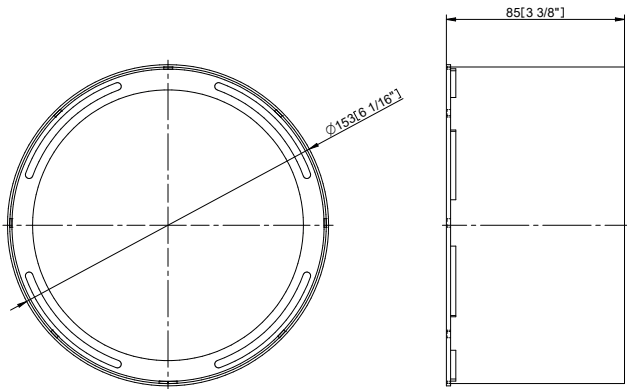


Half Top Hat

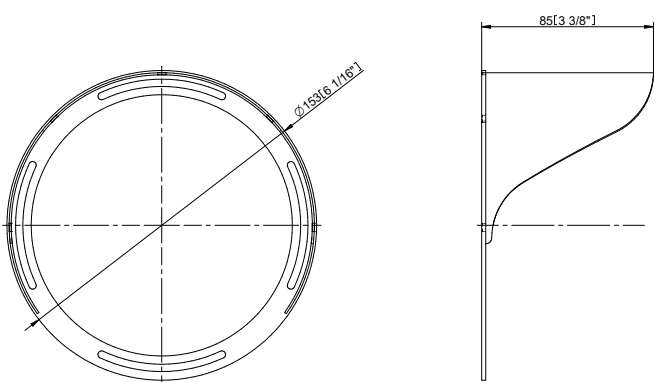

Floor Stand

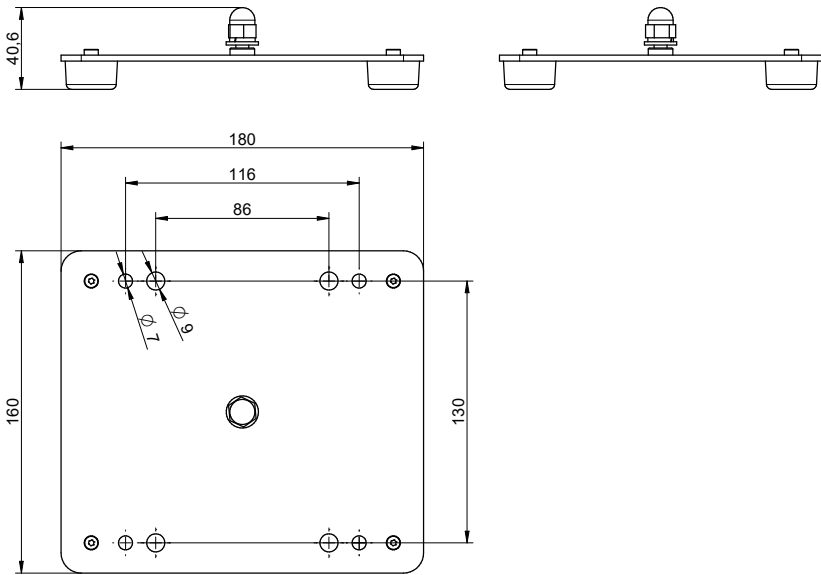


Pole Adaptor

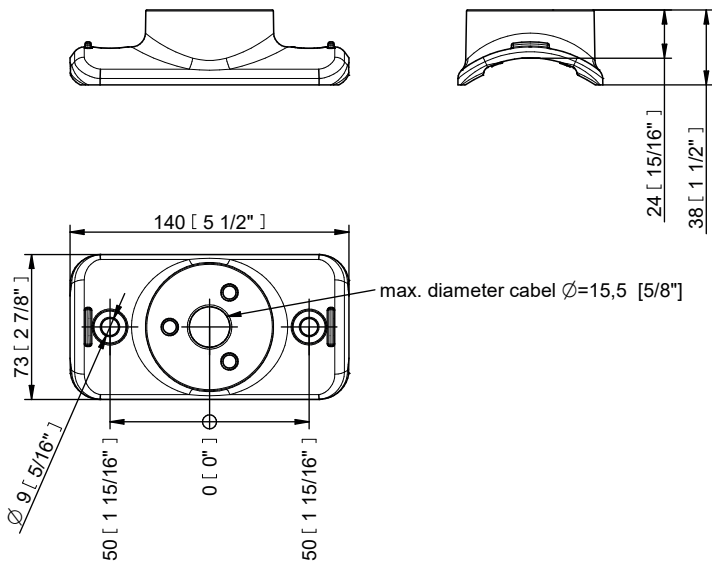

CONTROL AND CONNECTION OPTIONS


Via E-Box REMOTE (Calumma Remote S)

- 1) SJTW 5x 14AWG (1305 3336), black or On request Cable SJTW 5x 14AWG (13053697), white
- 2) Junction Box Remote, (4x Output)
- 3) Cable UL 20969 5x 20AWG (13053481), black or On request Cable UL 20969 5x 20AWG (13053696), white
- 4) Junction Box Remote, (1x Output)

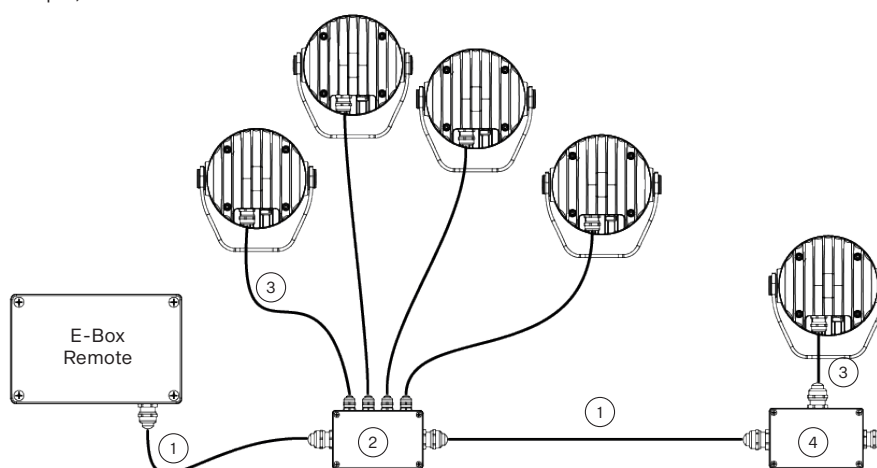

Via E-Box REMOTE (Calumma XS, Calumma Remote S, Eminere Remote)

- 1) SJTW 5x 14AWG (1305 3336), black or On request Cable SJTW 5x 14AWG (13053697), white
- 2) Junction Box Remote, (4x Output)
- 3) Cable UL 20969 5x 20AWG (13053481), black or On request Cable UL 20969 5x 20AWG (13053696), white
- 4) Junction Box Remote, (1x Output)

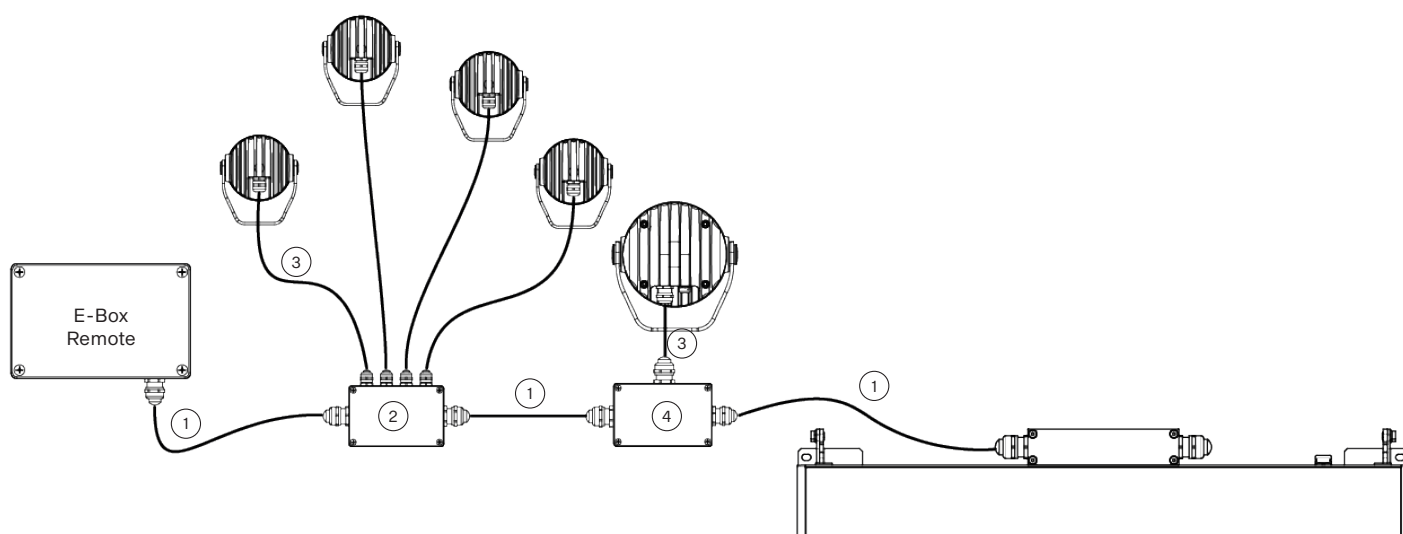


CONNECTION

The table states max. number of Calumma Remote S modules connected to the E-box Remote or Remote Basic.


Cable length (m)	Max. number of Calumma Remote S connected to the E-Box Remote or Remote Basic
	CALUMMA REMOTE S
25	13
50	10
75	8
100	6

BI-SYMMETRICAL BEAM ANGLES

Bi-symmetrical:
10°x30°,
10°x60°,
15°x45°,
15°x90°,
30°x60°,
30°x90°

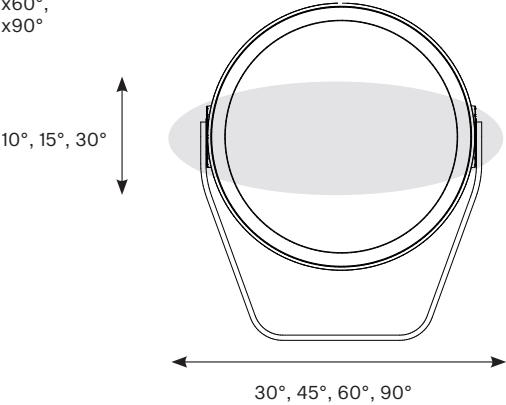

Bi-symmetrical:
30°x10°,
60°x10°,
45°x15°,
90°x15°,
60°x30°,
90°x30°


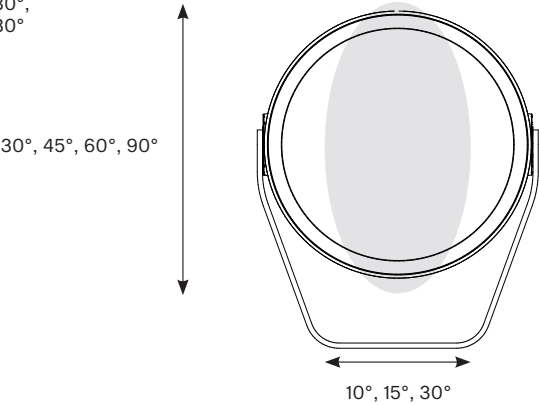


PHOTOMETRIC OVERVIEW


Lumen Output (lm)			
	RGBCW (W 6500 K)	RGBA	WW (W 3000 K)
10°	1958	1373	2424
15°	1784	1251	2208
25°	1744	1223	2159
30°	1712	1200	2119
45°	1748	1226	2164
65°	1713	1201	2120
100°	1735	1217	2148
10° x 30°, 30° x 10°	1723	1208	2133
10° x 60°, 60° x 10°	1714	1202	2122
15° x 45°, 45° x 15°	1789	1254	2215
30° x 60°, 60° x 30°	1704	1195	2109
30° x 90°, 90° x 30°	1606	1126	1988
15° x 90°, 90° x 15°	1687	1183	2088

Anolis






Calumma S SC RGBW 6500K 10dg

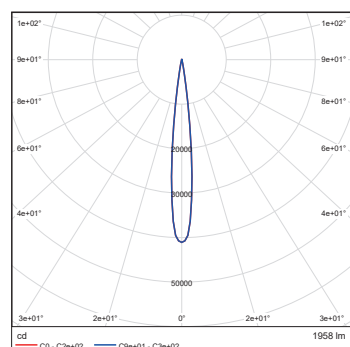


Calumma S SC RGBW 6500K 25dg




Calumma S SC RGBW 6500K 30dg

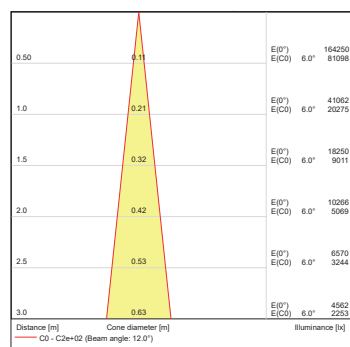





Calumma S SC RGBW 6500K 45dg

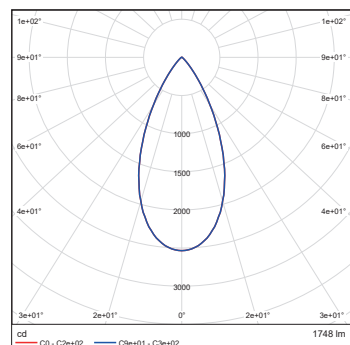

Calumma S SC RGBW 6500K 65dg





Calumma S SC RGBW 6500K 100dg

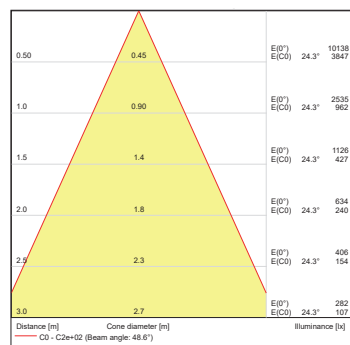



PHOTOMETRIC DATA



Calumma S SC RGBW 6500K
10x30dg





Calumma S SC RGBW 6500K
10x60dg





Calumma S SC RGBW 6500K 15x45dg



Calumma S SC RGBW 6500K 15x90dg



Calumma S SC RGBW 6500K
30x60dg



Calumma S SC RGBW 6500K
30x90dg

