

UVINERE 2 / 4

An excellent solution for theme parks and entertainment venues where an attention grabbing UV effect is required, UVinere produces a true black light effect. Available in 2-foot or 4-foot models, UVinere evenly distributes UV output with a wavelength of 365 nm for a wide range of installations and designs. Utilising a powered E-Box, control for the UVinere is made possible over DMX or Ethernet protocols. Consistent with the design quality of the entire Anolis product portfolio, the UVinere range is robust and extremely durable with IP67 and IK06 ratings.



KEY FEATURES

Optics & Control

With a wavelength of 365 nm, UVinere provides UV black light using 10,000-hour lifetime LEDs which can be powered by E-Box, and utilises DMX or ethernet protocols for control.

Physical

UVinere is available in two physical models; 2-foot and 4-foot LED luminaires. This fixture is easily installed with the simplicity of a "plug and play" connection.

Durability

Robust and durable, UVinere fulfills both IP67 and IK06 certification, backed by a 2-year warranty.

COLOURS



UV

OPTIC OPTIONS



NO OPTICS
APPROX. 92°



OPTICAL
24°

CONTROL & PROTOCOLS



OPTIONAL

STANDARD & SPECIFICATION



Vibration
Standard
for Bridge



Warranty

FINISH OPTIONS

* CLOSEST RAL TONE
* HE = Harsh Environment



Graphite Black
RAL 9011*



Grey Aluminium
RAL 9007



Sandstone
RAL 1014*



Pure White
RAL 9010



HE
Graphite Black
RAL 9011*



HE
Grey Aluminium
RAL 9007



HE
Sandstone
RAL 1014*



HE
Pure White
RAL 9010




Custom
Paint Colour

SPECIFICATION

ELECTRICAL	Input Voltage	120 - 277 V AC 50/60 Hz		
	Typical Power Consumption	UVinere 2: 45 W	UVinere 4: 85W	
OPTICAL	Light Source	UVinere 2: 16 x UV LEDs	UVinere 4: 32 x UV LEDs	
	UV LEDs Wave Length	365 nm		
	Beam Angle	Optic: 24° Non-optic: Approx. 92°		
	LEDs lifetime	10.000 hrs		
CONTROL	Interface Protocol	Via E-Box range		
	E-Box Control Protocols	E-box With Self Addressing Feature or Custom Setting Via LCD Display		
	Settings / Addressing	Via Two Row LCD Display with Control Buttons or RDM communicator		
	Power Supply	Integrated		
	Connectivity	E-box Lite / Daisy / Star	78 of UVinere 2 (@ 230 V and 30m cable) via 1 Output	
PHYSICAL	Width x Height x Length	UVinere 2	76 x 107 x 629 mm (2.99 x 3.58 x 24.76 in.)	
		UVinere 4	76 x 107 x 1229 mm (2.99 x 3.58 x 48.38 in.)	
	Weight	UVinere 2: 4.05 kg 8.92 lbs	UVinere 4: 7.68 kg 16.93 lbs	
	Housing	High Pressure Extruded Aluminium Body End Caps - Die-Cast Aluminium Tempered Glass		
	Finish Options	Standard Colour	Graphite Black RAL 9011 Grey Aluminium RAL 9007 Pure White RAL 9010 Sandstone RAL 1014	
		Standard Colour Harsh Environment	Graphite Black RAL 9011 Grey Aluminium RAL 9007 Pure White RAL 9010 Sandstone RAL 1014	
		Cost Option	Custom RAL	
	Connections	IP67 Hybrid Connection (Power + Data)		
	Mounting Method	Surface Mount With Different Type of Brackets		
	Adjustability	+/- 95°		
	Protection Factor	IP67 / Suitable For Wet Locations		
	IK Rating	IK06		
	Cooling System	Convection		
	Operating Ambient Temperature	-20 °C / +40 °C (-4 °F / +104 °F)		
	Operating Temperature	+67 °C @ Ambient +40 °C (+176 °F @ Ambient +104 °F)		
	CERTIFICATION	Listings	CE, RoHS, UKCA	
	ACCESSORIES	Not Included Items		
Mounting Brackets		Mounting Bracket 50 100 200 300 mm Custom length		
Optical		Black Glass Adaptor For UVinere 2 4		
Cabels		Leader Cable 2m 5m 10m 25m 50m		
		Jumper Cable 0.25m 0.5m 1m 2m 3m 5m 10m		
Connectors		Field Installable Connector		
		Waterproof End Cap		
Cable Covers		Cable Cover For Eminere 2 4		
Shields		Shield For Eminere 2 4		

DIMENSIONS

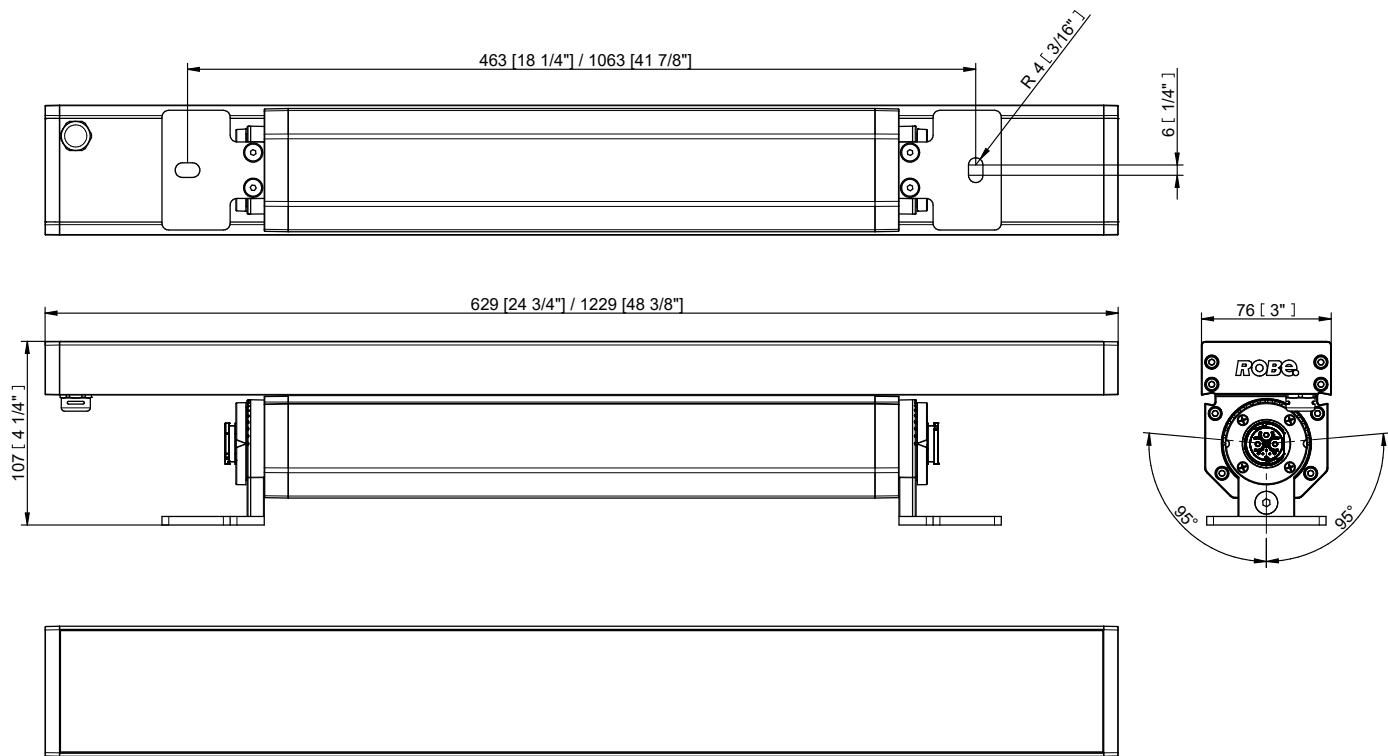

PROJECTED AREA

	Front (rear) - m²	Front (rear) ft²	Side - m²	Side - ft²	Top - m²	Top - ft²
UVinere 2	0,045	0,484	0,007	0,075	0,048	0,516
UVinere 4	0,100	1,076	0,007	0,075	0,094	1,011

E-BOX SPECIFICATION


ELECTRICAL	Input Voltage	120 – 277 V AC 50/60 Hz		
	Wireless DMX (Option)	Lumen Radio CRMX Technology		
CONTROL	Interface Protocol	E-box Lite: USITT DMX512, RDM		
		E-box Daisy / Star: USITT DMX512, RDM, ArtNet, MA Net, MA Net2, sACN, Kling-Net		
	Operating Modes	E-box Lite / Daisy: Fixture Mode, Pixel Mode, Output Mode		
		E-Box Star: Total Mode, Fixture Mode, Pixel Mode, Output Mode		
	Display	Via Two Row LCD Display with Control Buttons or RDM communicator		
	Control System	E-box With Self Addressing Feature or Custom Setting Via LCD Display/RDM		
	Power Supply	Integrated		
	Connectivity	E-box Lite	144 of Eminere 1 (@ 230 V and 40m cable) via 1 Output	
PHYSICAL		E-box Daisy	144 of Eminere 1 (@ 230 V and 40m cable) via 1 Output	
		E-box Star	144 of Eminere 1 (@ 230 V and 40m cable) via 6 Outputs	
	Length x Width x Height	E-box Lite	220 x 120 x 81 mm (8.66 x 4.72 x 3.18 in.)	
		E-box Daisy	260 x 160 x 91 mm (10.24 x 6.30 x 3.58 in.)	
		E-box Star	280 x 230 x 111 mm (11.02 x 9.06 x 4.37 in.)	
	Weight	1.67 kg 3.85 lbs	2.78 kg 6.13 lbs	4.4 kg 9.7 lbs
	Housing	Die-Cast Aluminium Case		
	Finish Options	Standard Colour - Graphite Black (RAL 9011) Silver (RAL 9006)		
CERTIFICATION		Cost Option - Custom RAL Harsh Environment (RAL 9016, RAL 9011)		
	Cables / Connections	Cable Grommet (stainless steel)		
	Mounting Method	Surface Mount , 4 Mounting Holes		
	Protection Factor	IP67 / Suitable For Wet Locations		
	IK Rating	IK10		
	Cooling System	Convection		
	Operating Ambient Temperature	-20 °C / +40 °C (-4 °F / +104 °F)		
	Listings	ETL / cETL, CE, RoHS, UKCA		

COMPARISON


	E-BOX LITE	E-BOX DAISY	E-BOX STAR
Power input	1	1	1
Fixture Output	1	1	6
Total load (current)	16A	16A	16A
DMX control	YES	YES	YES
RDM	YES	YES	YES
Art-Net	NO	YES	YES
Ethernet switch	NO	YES	YES
Kling-Net	NO	YES	YES
sACN	NO	YES	YES
MA Net, MA Net2	NO	YES	YES

E-BOX DIMENSIONS


E-BOX LITE

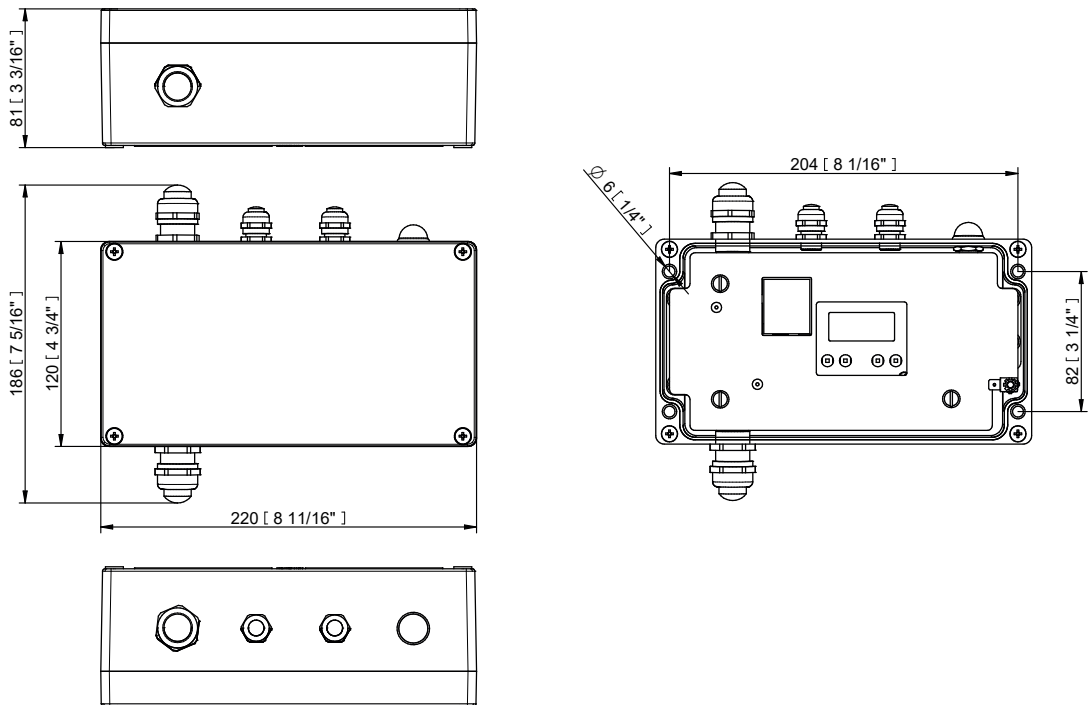

E-BOX DAISY

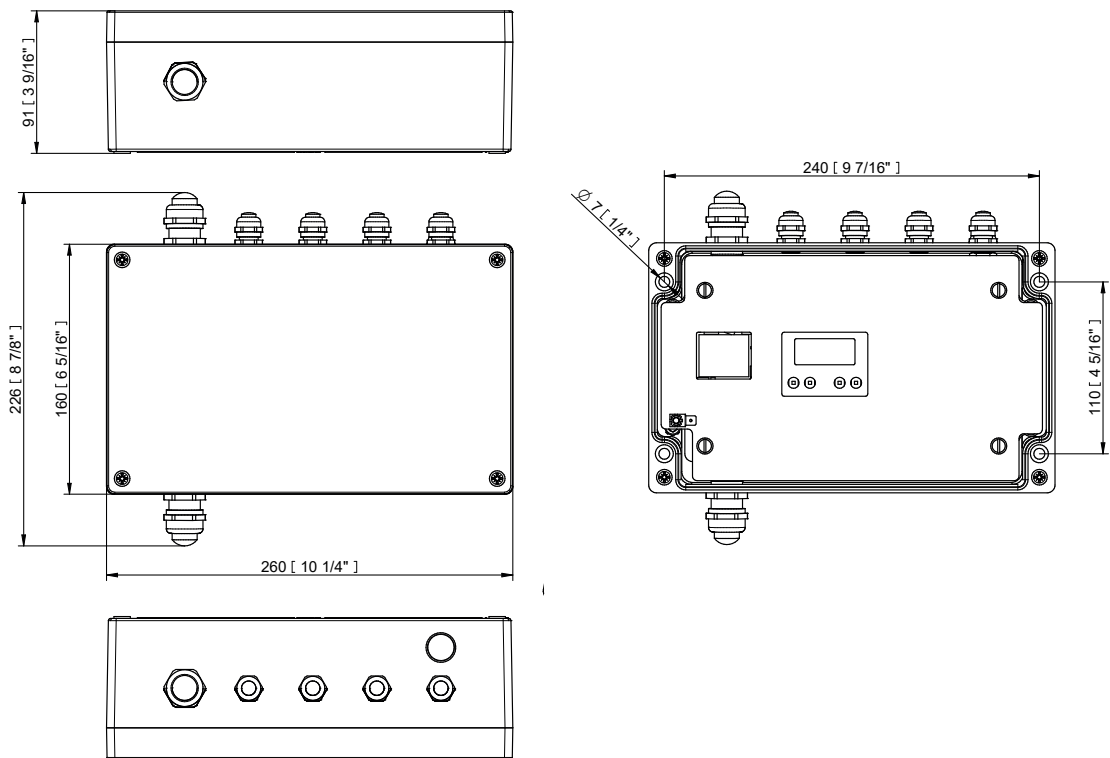

E-BOX STAR

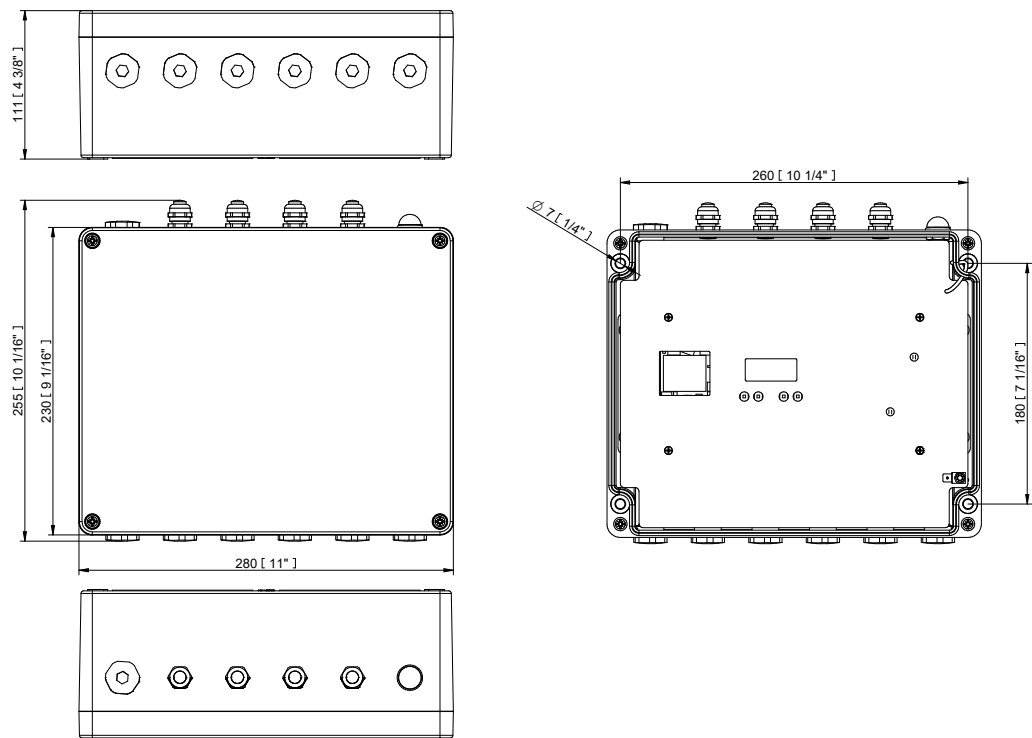


CONNECTIVITY

Following table shows maximum connected UVinere on each output of E-Box with respect of cable length.


Cable length (m)		Voltage (V)					Cable length (m)		Voltage (V)				
		100	120	190	230	277			100	120	190	230	277
UVINERE 2	10	34	41	64	78	94	UVINERE 4	10	17	21	33	40	48
	20	30	41	64	78	94		20	15	21	33	40	48
	30	20	28	64	78	94		30	10	15	33	40	48
	50	12	17	43	63	91		50	6	9	22	32	47
	70	8	12	31	45	65		70	4	6	16	23	38
	100	6	9	21	31	46		100	3	4	11	16	23
	200	3	4	11	16	23		200	2	2	5	8	12

* Cable length is a total cable length between E-box and last connected UVinere. Example: Total cable length=L1+L2+L3

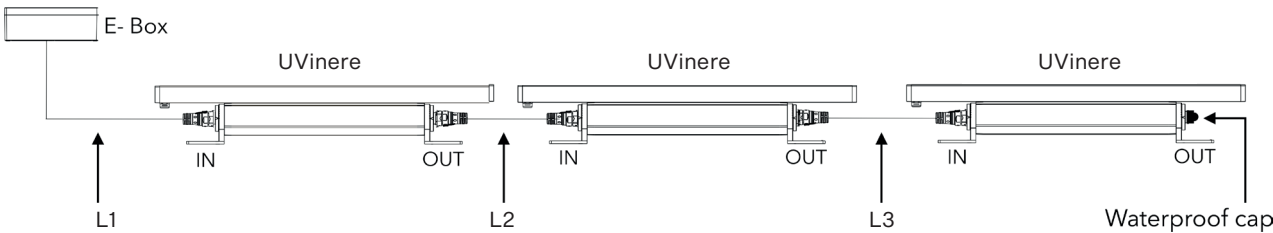


CONNECTION

E-BOX LITE / DAISY

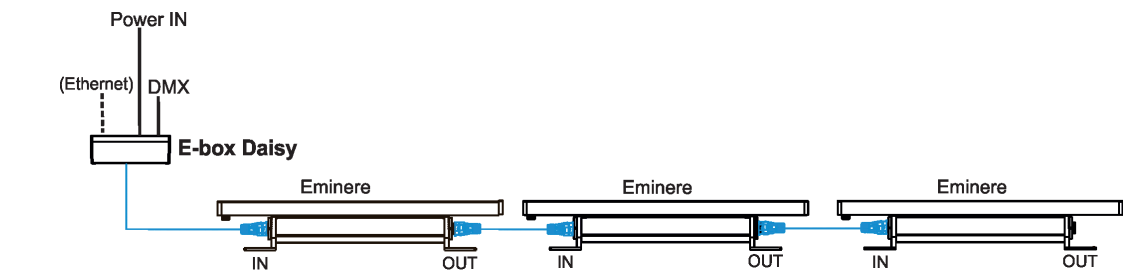


E-BOX STAR

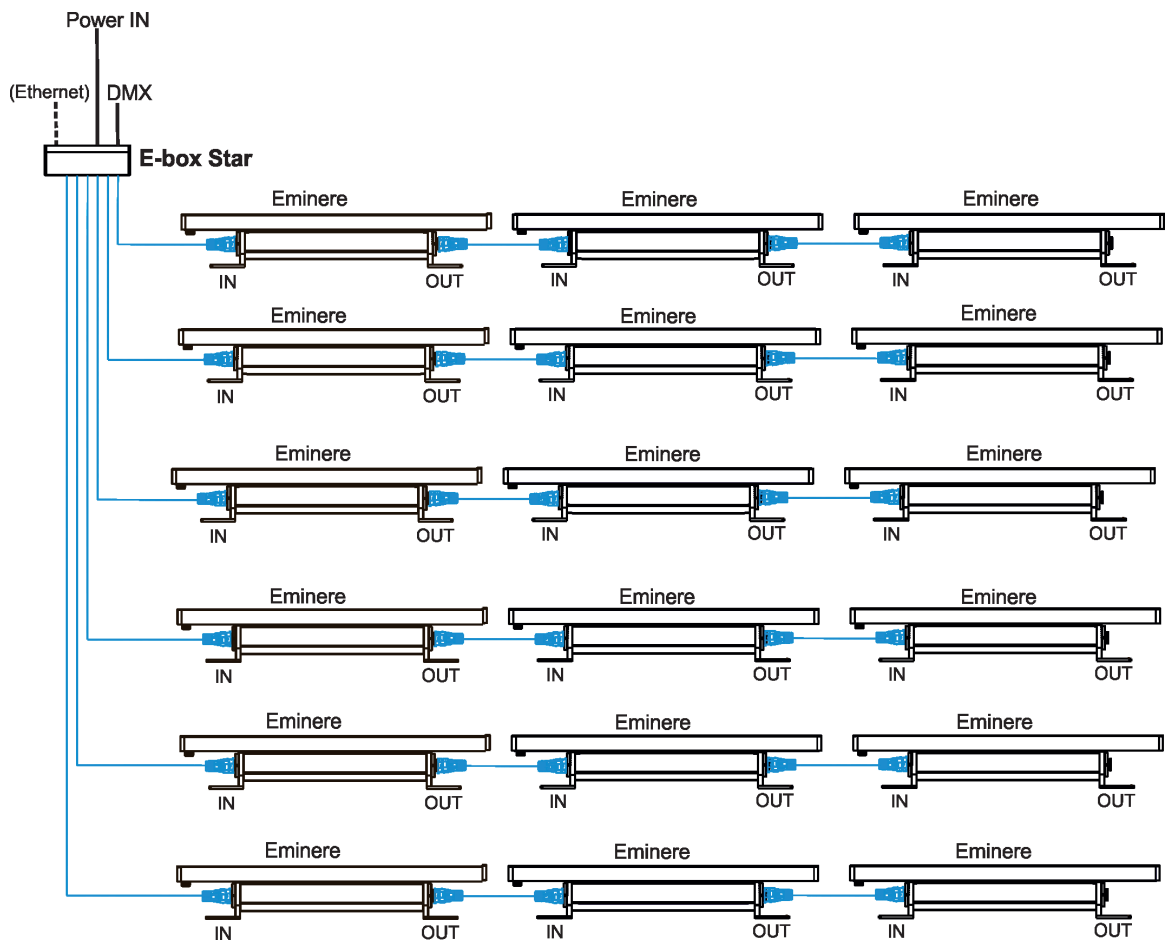


THE BOOSTER BOX


To compensate a voltage drop in a large installation, the Booster boxes have to be connected in the chain of Eminere modules.



Example: E-box Daisy, Power supply= 230V, Cable length=70m, fixture=Eminere 2.
The Booster box has to be connected after every 45th Eminere 2 (fixture 45 and fixture 90) from 94 fixtures.

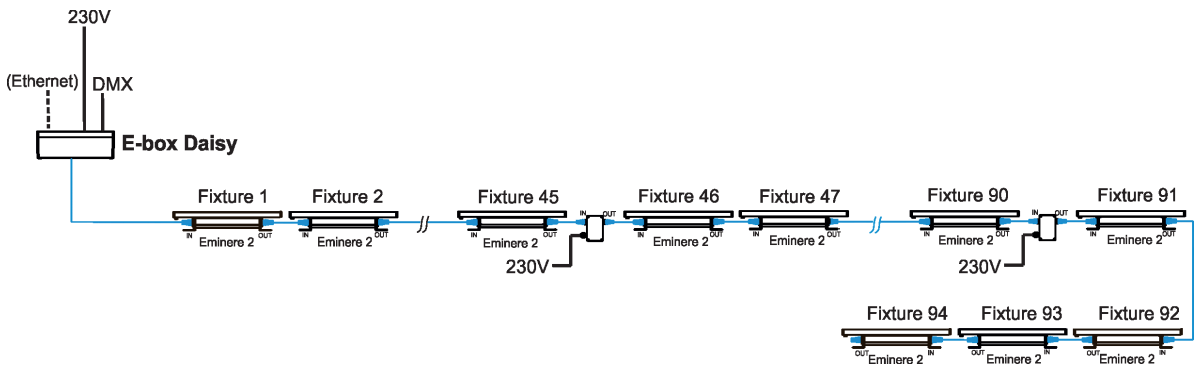

DIMENSIONS

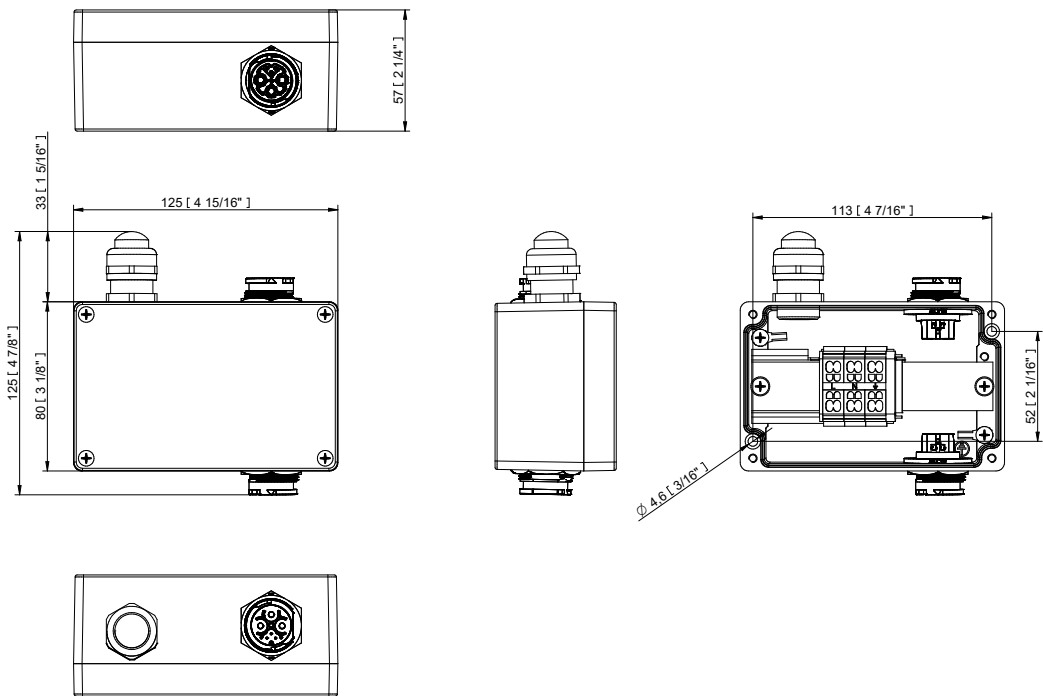


BOOSTER BOX POSITIONS

		Max. number of Emineres 1 = 191 (in Standard mode)			
		120 V	190 V	230 V	277 V
EMINERE 1	10 m	83,166	131	159	-
	20 m	83,166	131	159	-
	30 m	58,116,174	131	159	-
	50 m	35,70,105,140,175	88,176	128	186
	70 m	25,50,75,100,125,150,175	63,126,189	92,184	133
	100 m	17,34,51,68,85,102,119,136,153,170,187	44,88,132,176	64,128	93,186
	200 m	9,18,27,36,45,54,60,72,81,90,99,108,117,126,135,144, 153,162,171,180,189,	22,44,66,88,110,132,154,176	32,64,96,128,	47,94,141,188


NOTE: For more detail see the User manual.

ACCESSORIES


Cable Cover for Eminere

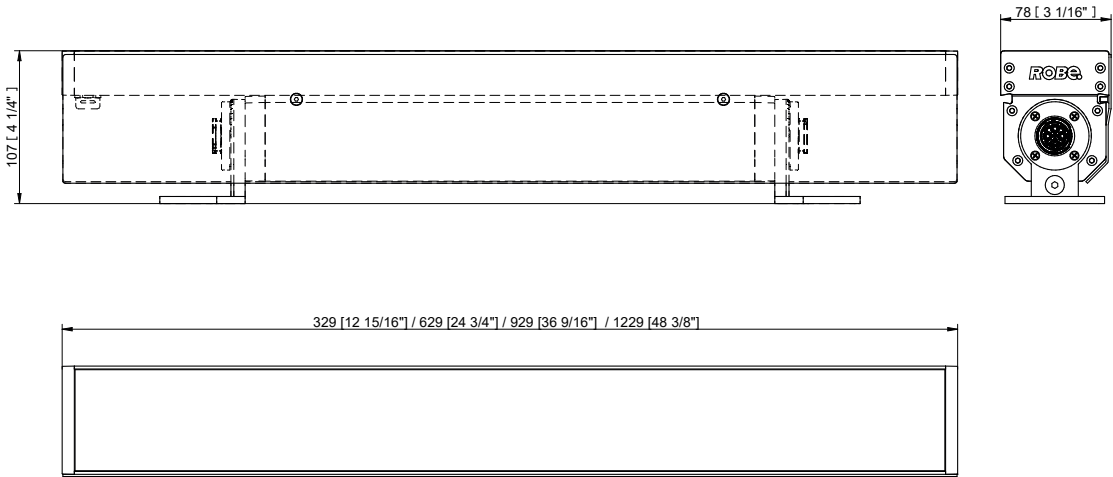


Shield for Eminere

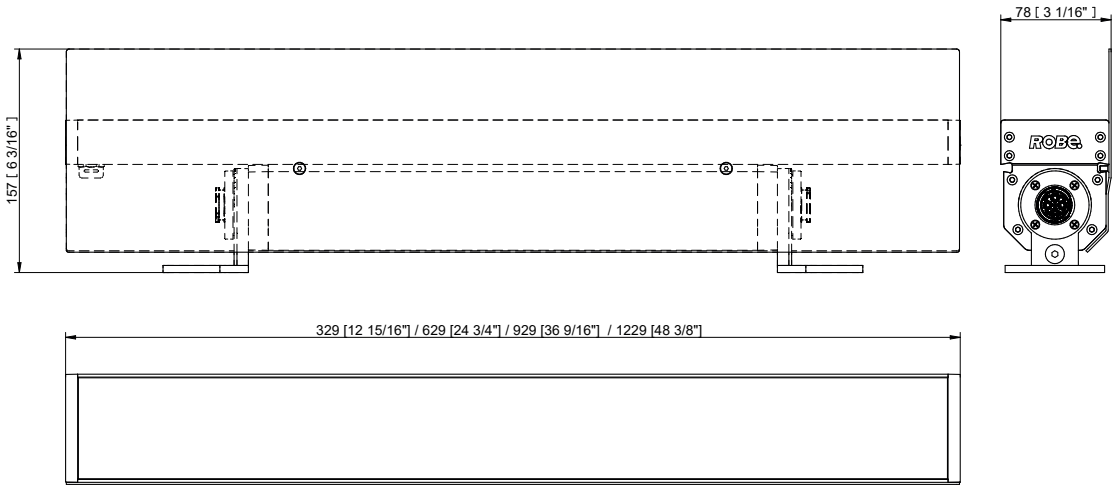

Mounting brackets

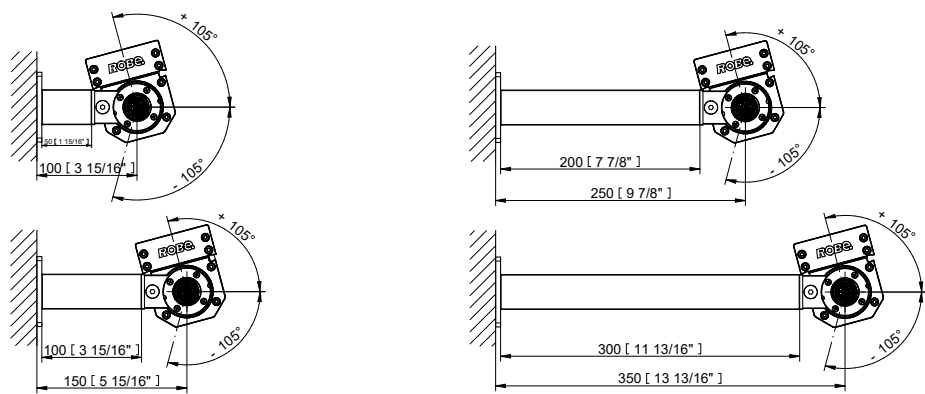

Black Glass Adaptor For UVinere

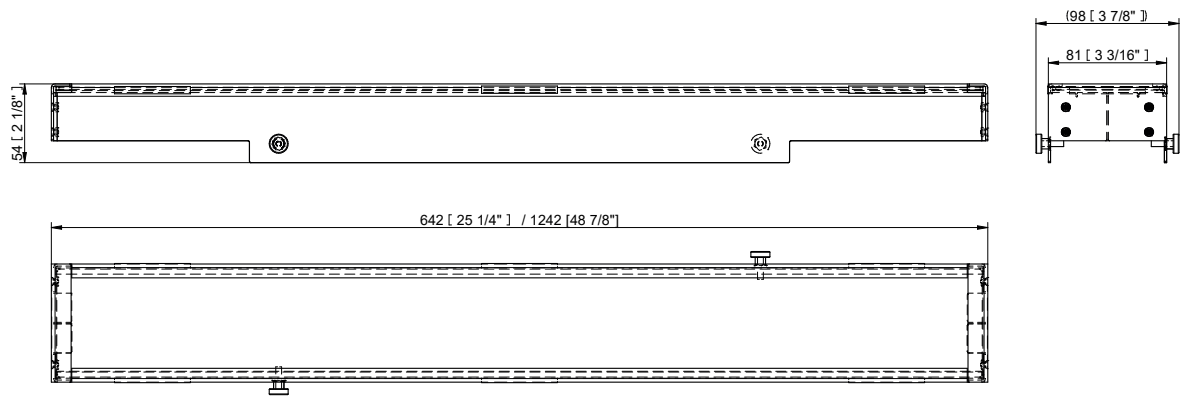


CABLES

Leader Cable

For connecting E-Box with first Eminere. Comes with Waterproof End Cap which has to be installed to the last Eminere’s output connector.

Female connector

Female pins




Jumper Cable

For connection between two Emineres.

NOTE: Custom length of Jumper cable depends on the distance between two Eminere luminaires (length includes cable and connectors).

Female connector

Female pins



Female connector



Male pins

Field installable connector

For special cases, where Jumper Cable can’t be used. Then use Leader Cable with Field installable connector to make a connection between Emineres.

Female connector

Female pins




Female connector

Male pins

Output - panel connector
(front view)




Input - panel connector
(front view)



Waterproof End Cap

Install at the end of line to the last Emineres output connector.

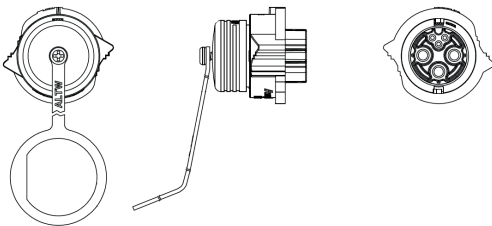

Cable lengths available

IN METRES	LEADER CABLE	JUMPER CABLE
0,25	–	YES
0,5	–	YES
1	–	YES
2	YES	YES
3	–	YES

IN METRES	LEADER CABLE	JUMPER CABLE
5	YES	YES
10	YES	YES
25	YES	–
50	YES	–
Other lengths	On Request	