

CALUMMA™ ARTS XS SC

Calumma Arts XS SC is a compact architectural luminaire with a strong artistic character, designed to transform light into a creative expression. Featuring high-power single-chip LED technology, it is available with precise 10° optics or without optics, and offers a choice of 4 interchangeable lenses and 9 textured glass options to create layered projections and an exceptionally wide variability of final lighting effects. The optical system can be customized directly on site, allowing designers to fine-tune the output to perfectly suit the installation. With its durable IP67-rated housing for fixture, wide control compatibility and elegant design, Calumma Arts XS SC delivers versatile, expressive lighting for distinctive architectural applications.



KEY FEATURES

Lumen output & Light source

Luminaire with four high-power, single-chip LEDs provides up to 457 lumen output (@10°, PW 3000 K). No light spills.

Design & Durability

Lightweight, compact, durable and stylish housing made of high-pressure die cast aluminium. IP67 for fixture, IP65 for its tube and IK10 certification; suitable for marine applications (Harsh Environment Finish required) and traffic applications. Supported with a 5 year warranty.

Flexibility

An exceptionally compact luminaire available with a wide range of accessories and custom colour finishes, Calumma Arts XS SC offers lighting designers a highly flexible solution based on interchangeable lenses and textured glass elements that can be freely combined to create unique, original lighting effects for the most demanding applications.

COLOURS

STANDARD



PW
(3000 K)



TW
(2200-3000 K)

UPON REQUEST



2.200 K



2.700 K

AVAILABLE COLOURS
FOR CUSTOM SETUP



3.000 K



4.000 K



6.500 K

CONTROL & PROTOCOLS



REMOTE /
REMOTE
BASIC



PW & SINGLE
COLOUR
ONLY

FINISH OPTIONS

* CLOSEST RAL TONE
* HE = Harsh Environment



Graphite Black
RAL 9011*



Grey Aluminium
RAL 9007



Sandstone
RAL 1014*



Pure White
RAL 9010



HE
Graphite Black
RAL 9011*



HE
Grey Aluminium
RAL 9007



HE
Sandstone
RAL 1014*



HE
Pure White
RAL 9010



RAL
Custom
Paint Colour

OPTIC OPTIONS



NO OPTICS



10°

LENSES



ARC



FRACTAL



LINE



PC

TEXTURED GLASS



HAMMERED



DIAMOND



MATRIX



CUBE



DEWDROP



FLORENTINE



CATHEDRAL



RIPPLE



STREAM



AEROLITE



FLUTES



LISTRAL

STANDARD & SPECIFICATION



Tube



Fixture



IK10



ENEC



UK
CA



5
YEAR



Vibration
Standard
for Bridge



ROHS

SPECIFICATION

ELECTRICAL	Input Voltage	48 V	
	Typical Power Consumption	10 W +/-10 %	
OPTICAL	Light Source	High Power Single Chip LEDs	
	Colour Variants	Pure White (W - 3000 K) Tuneable White (2200–3000 K) Custom Setup On Request: 2200 K, 2700 K, 3000 K, 4000 K, 6500 K	
	Beam Angle	10° No Optics	
	Lumen Output Delivered	457 lm (@ 10°, PW 3000 K) TBC	
	Projected Lumen Maintenance	L90B10 >90.000 hrs, Ta = 25°C / 77°F	
CONTROL	Interface protocol	Via E-box Remote or E-box Remote Basic ON/OFF (PW & single colour only)	
	E-Box Remote control protocol	USITT DMX512/RDM, ArtNet, MA Net, MA Net2, sACN, Kling-Net	
	Setting / adresssing	E-box Remote, RDM communicator	
	Connectivity & Power Supply	E-Box Remote Remote Basic	
PHYSICAL	Width x Height x Depth	94 x 112 x 224 mm (3.7 x 4.4 x 8.8 in.)	
	Weight	1.4 kg 3.1 lbs	
	Housing	High Pressure Die-Cast Aluminium Body Tempered Glass	
	Finish Options	Standard Colour	Graphite Black RAL 9011 Grey Aluminium RAL 9007 Pure White RAL 9010 Sandstone RAL 1014
		Standard Colour Harsh Environment	Graphite Black RAL 9011 Grey Aluminium RAL 9007 Pure White RAL 9010 Sandstone RAL 1014
		Cost Option	Custom RAL
	Cabels / Connectivity	IN (for DMX, DALI): - 1 m cable with bare end - Other cable length - custom - Junction box - optional	IN (for E-Box Version): - Cable (5x20 AWG) 0.5 m, with Connector MM
	Mounting Method	Yoke or Yoke for Pole Adaptor	
	Adjustability	+180° / -180°	
	Protection Factor	IP67 (fixture) / IP65 (tube) / Suitable For Wet Locations	
	IK Rating	IK10	
	Cooling System	Convection	
CERTIFICATION	Operating Ambient Temperature	-20°C / +50°C (-4°F / +122°F)	
	Listings	ETL / cETL, CE, RoHS, UKCA	
ACCESSORIES	Not Included Items	Re-enterable Electrical Insulating Resin	
		Land Spike for Calumma XS	
		Twin Wall Cover Calumma XS	
		Pole Adaptor (ø 102 mm) (Yoke for Pole Adaptor Required)	
		Floor Stand for Calumma Arts XS	
		Lenses for Calumma Arts XS	PC Lens Fractal Lens ARC Lens Line Lens
		Textured Glass for Calumma Arts XS	Hammered Glass Diamond Glass Matrix Glass Cube Glass DewDrop Glass Florentine Glass Cathedral Glass Ripple Glass Stream Glass Aerolite Glass Flutes Glass Lislral Glass

ACCESSORIES	DMX CONNECTOR SOLUTION	Leader CE Cable FF, 0.1 m, MINI-05 (13053978)
		Cable 5x20 AWG, 0.5 m, with connector MINI-05 MM (13053935-03)
Not Included Items	DMX CONNECTOR SOLUTION	T-connector MINI-05 MFF (13053941-01)
		T-connector MID-05 MFF (13054130)
		Field Installable Connector MID-05 MM (14–22 AWG) - (13054126)
		Adaptor MINI2MID (13054150)
		Adaptor MID2MINI (13054149)
		Waterproof Cap for Female connector AD-05 (13053943)
		Waterproof Cap for Male connector AD-05 (13053942)
		Cable SJTW 5x14 AWG (13053336), standard with bare-end, black - 1/3/5/10 m
		Cable SJTW 5x14 AWG (13053697), with bare-end, white (on request) - 1/3/5/10 m
		Jumper Cable CE/US MID-05 MM/FF (14 AWG) 0.5 m 1 m 3 m 5 m
	DMX BARE-END SOLUTION	Jumper Cable MINI-05 FF/MM (20 AWG), 0.5 m (13053937-02)
		Cable SJTW 5x14 AWG (13053336), standard with bare-end, black - 1/3/5/10 m
		Cable SJTW 5x14 AWG (13053697), with bare-end, white (on request) - 1/3/5/10 m
		Cable UL 20969 (5x20 AWG), 1 m, (13053481), black
		Cable UL 20969 (5x20 AWG), 1 m, (13053696), white (on request)
		Junction Box Remote (1x Output) - (10980715)
		Junction Box Remote (4x Output) - (10980716)

CE: CONTROL AND CONNECTION OPTIONS

CE: DMX - CONNECTOR SOLUTION

A E-BOX REMOTE / REMOTE BASIC / REMOTE BASIC MINI

- 1)


Leader CE Cable FF, 0.1 m, MINI-05 (13053978)
- 2)

Jumper Cable MINI-05 FF/MM (20 AWG), 0.5 m (13053937-02)
- 3)

T-connector MINI-05 MFF (13053941-01)
- 4)

Cable 5x20 AWG, 0.5 m, with connector MINI-05 MM (13053935-03)


Note: The last unmated connector must be fitted with an Waterproof Cap to protect the IP rating.

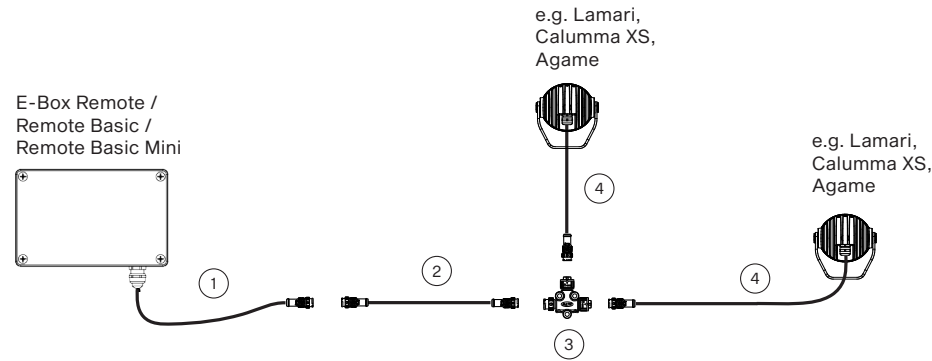

B E-BOX REMOTE / REMOTE BASIC / REMOTE BASIC MINI

- 1) SJTW 5x14 AWG (13053336), standard with bare-end, black
- 2) Field Installable Connector MID-05 FF (14–22 AWG) - (13054127)
- 3) T-connector MID-05 MFF (13054130)
- 4) Jumper Cable CE/US MID-05 FF/MM (5x14 AWG), 0.5 m (13054131)
- 5) Adaptor MID2MINI (13054149)
- 6) Cable 5x20 AWG, 0.5 m, with connector MINI-05 MM (13053935-03)


Note: The last unmated connector must be fitted with an Waterproof Cap to protect the IP rating.

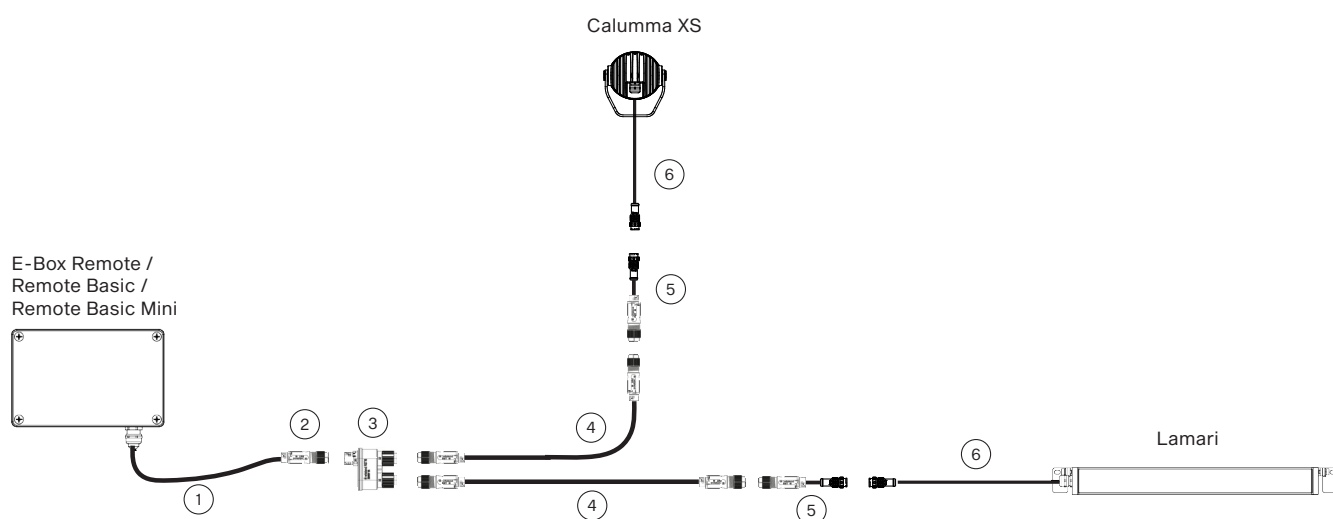

C E-BOX REMOTE / REMOTE BASIC / REMOTE BASIC MINI WITH PANEL CONNECTORS

- 1) Jumper Cable CE/US MID-05 FF/MM (5x14 AWG), 0.5 m (13054131)
- 2) Adaptor MID2MINI (13054149)
- 3) Jumper Cable MINI-05 FF/MM (20 AWG), 0.5 m (13053937-02)
- 4) T-connector MINI-05 MFF (13053941-01)
- 5) Cable 5x20 AWG, 0.5 m, with connector MINI-05 MM (13053935-03)

Note: The last unmated connector must be fitted with an Waterproof Cap to protect the IP rating.

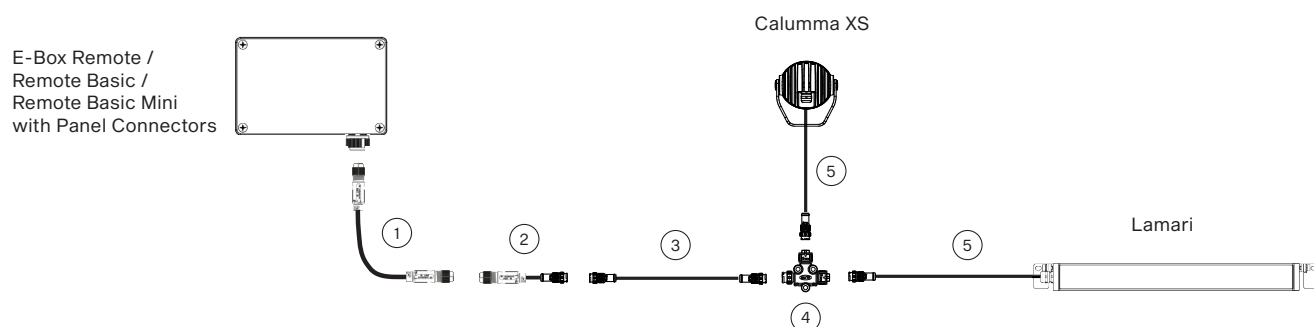


CE: DMX - BARE-END SOLUTION

A E-BOX REMOTE / REMOTE BASIC / REMOTE BASIC MINI

- 1) SJTW 5x14 AWG (13053336), Standard 1 m with bare-end, black or on request Cable SJTW 5x14 AWG (13053697), with bare-end, white
- 2) Junction Box Remote (4x Output) - (10980716)
- 3) Junction Box Remote (1x Output) - (10980715)
- 4) Cable UL 20969 5x20 AWG (13053481), black or on request Cable UL 20969 5x20 AWG (13053696), white


Note: The last unmated connector must be fitted with an Waterproof Cap to protect the IP rating.

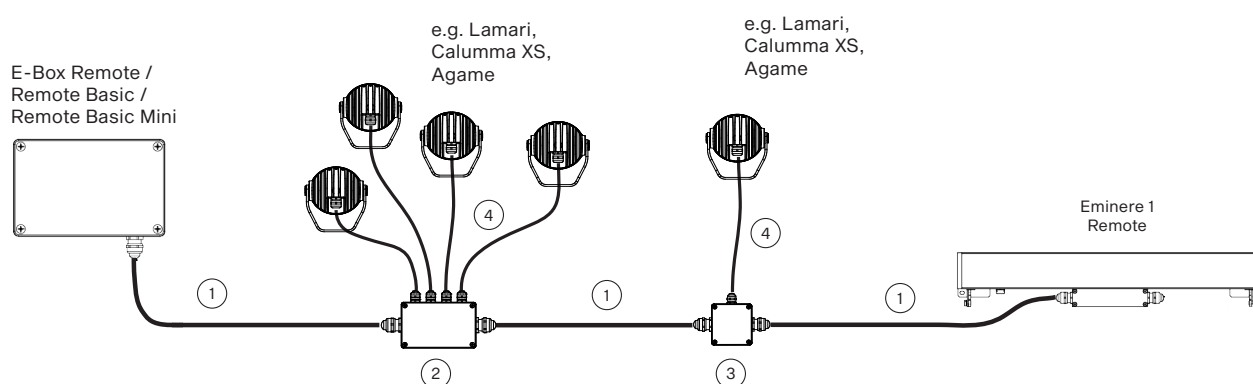

B E-BOX REMOTE / REMOTE BASIC / REMOTE BASIC MINI


- 1) SJTW 5x14 AWG (13053336), standard with bare-end, black
- 2) Junction Box Remote (4x Output) - (10980716)
- 3) Junction Box Remote (1x Output) - (10980715)
- 4) Cable UL 20969 (5x20 AWG), 1 m, (13053481), black
- 5) Cable 5x20 AWG, 0.5 m, with connector MINI-05 MM (13053935-03)

Note: The last unmated connector must be fitted with an Waterproof Cap to protect the IP rating.

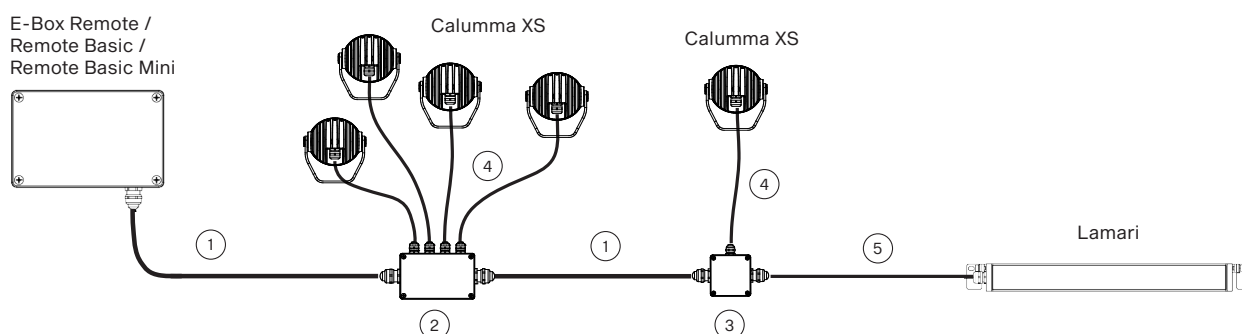

ON/OFF

- 1) Cable UL 20969 5x20 AWG (13053481), black
or on request Cable UL 20969 5x20 AWG (13053696), white
- 2) Junction Box Remote (4x Output) - (10980716)
- 3) Junction Box Remote (1x Output) - (10980715)

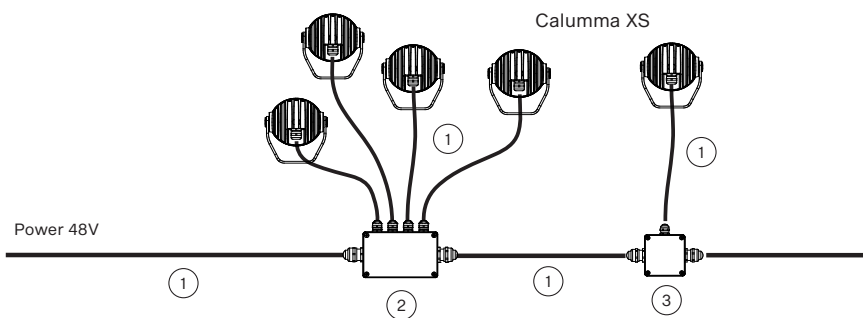


CONNECTIVITY

Following table shows maximum connected Calummas Arts XS SC in a row with respect of cable length.


Cable length	Per E-Box Remote	Per 1 LED output
50 m (max per 1 output)	40 pcs	20 pcs
100 m (total length, 2x output)		20 pcs

DIMENSIONS

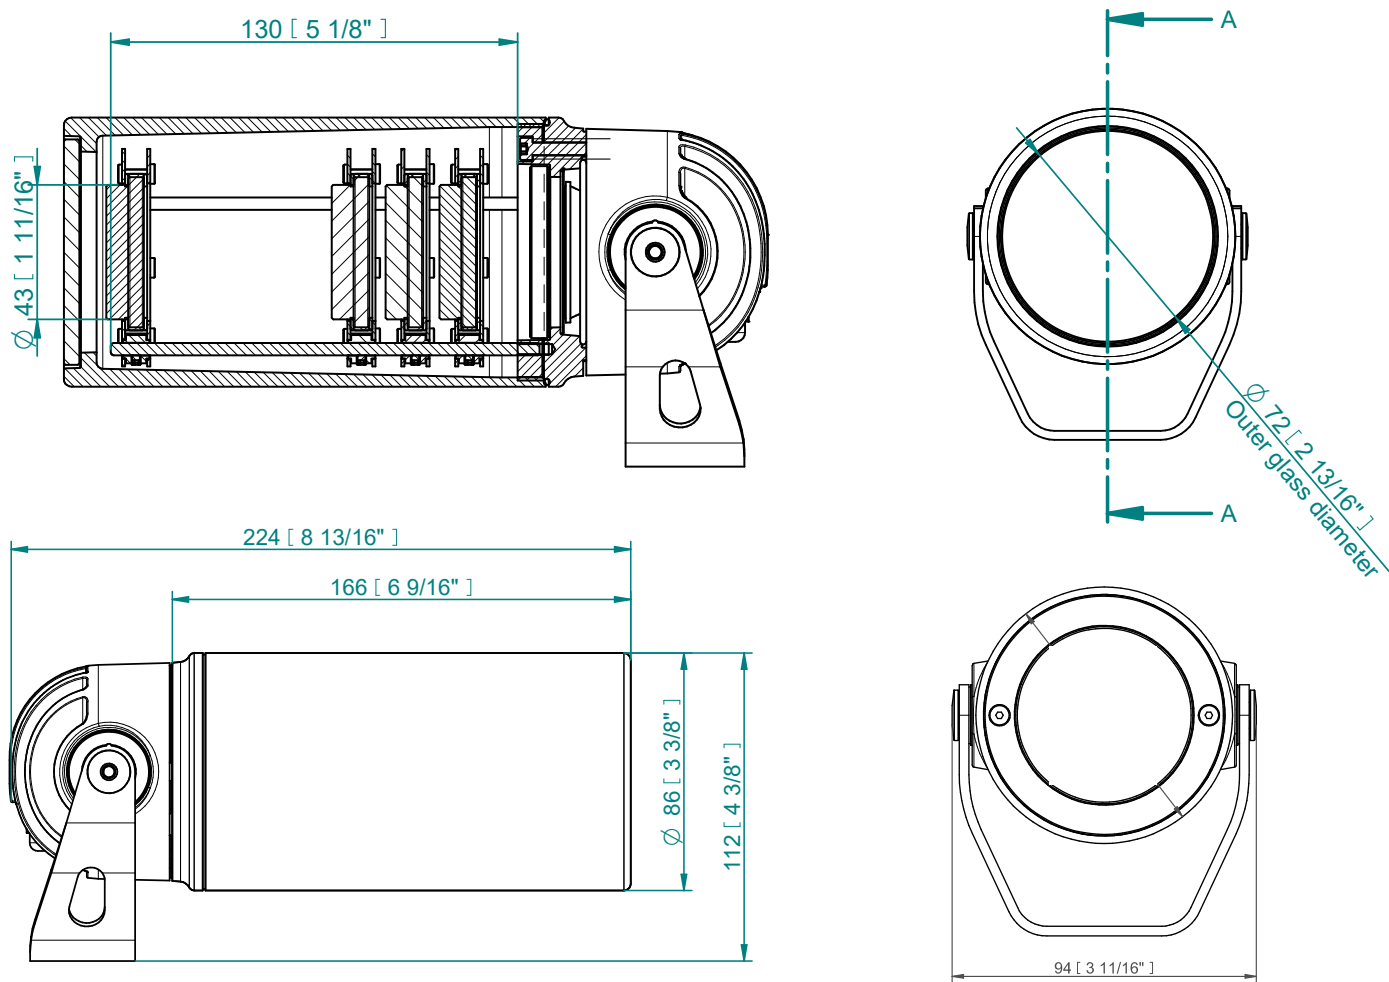

ACCESSORIES


Land Spike for Calumma XS

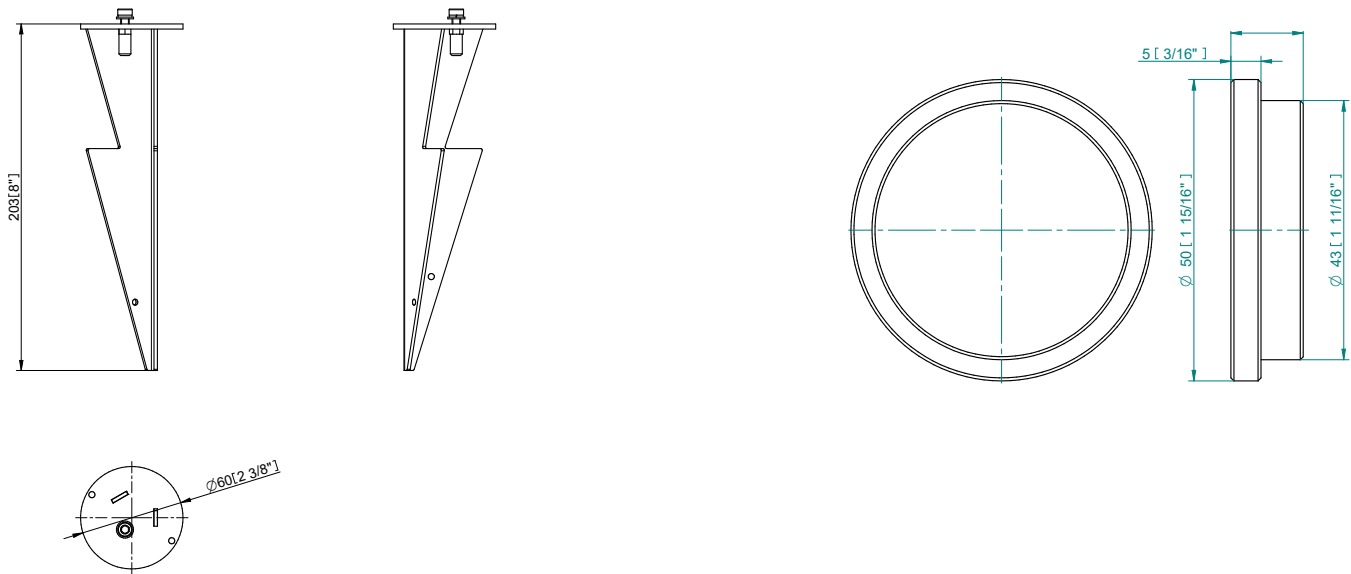

for Calumma XS

Pole Adaptor (ø 102 mm, Yoke for pole Adaptor Required / PA)

Example of ordering code: Calumma XS SC RGBCW 15° PA

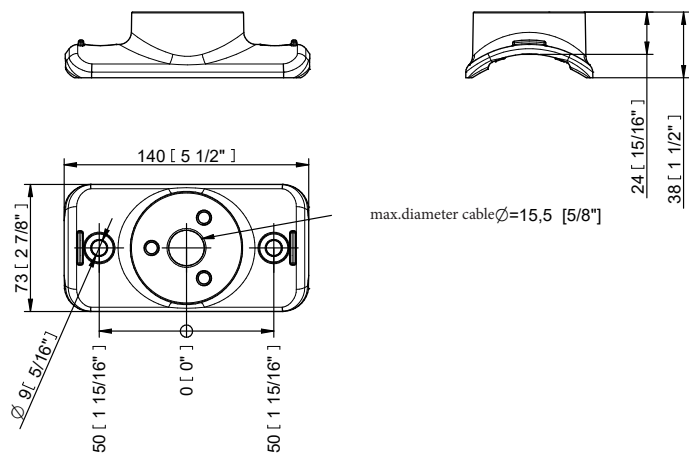

Floor Stand for Calumma Arts XS

