

ArcLink tm

Client: _____

Project: _____



Specifier: _____

Type: _____ Qty: _____



FEATURES:

- Input Voltage: 48V DC Via ArcPower Range
- Power consumption: 3.4W, 4.5W
- Light Source: 3 and 4 LED Options
- Delivered Lumen: Range of
 - 135lm (3) 184lm (4) RGBWW Optic
 - 90lm (3) 120lm (4) RGBWW Non Optic
- Projected LED Life: 60,000 Hrs
- Lumen Output Per Foot: 202lm (Optic 3) 276lm (Optic 4)
- Control: DMX Controller
- Housing: Aluminium Base
- Fixing Method: Fixing Holes
- IP Rating: IP2X
- Operating Ambient Temp: -20°C/+40°C (-4°F/+104°F)
- Certification: CE, RoHS
- 5 Year Warranty

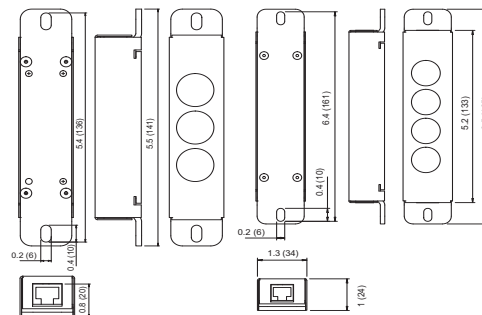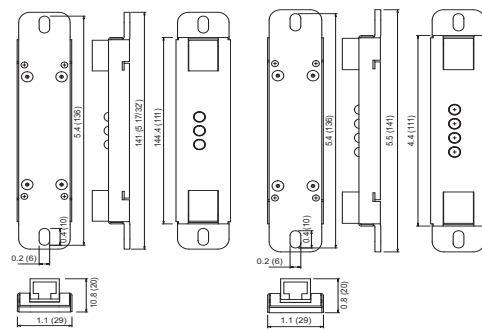

How To Order							
	GROUP	VARIANT	SIZE	COLOUR	OPTIC	FINISH	OPTIONS
ARC	1	2	3	4	5	6	7
	LNK	IND	3	RGBW - Red, Green, Blue, White	10°	S - Silver	CUS - Custom
			4	RGB - Red, Green, Blue	22°	B - Black	MTP - Multiple
				PW - Pure White	30°	W - White	CCL - Custom Cable Length
				SW - Smart White	EL°	C - Custom	
				R - Red	34°		
				G - Green	NN		
				B - Blue			
				A - Amber			
Example	ARCLINK 4 RGBPW 34 BLACK						
ARC	LNK	IND	4	RGBPW	34	B	


Colour temperature to be specified at time of order

NOTE:- RGBW FOR ARCLINK 4 ONLY

ROBE lighting s.r.o. Palackeho 416 757 01 Valasske Mezirici, Czech Republic. Tel: +420 571 751 500 - Fax: +420 571 751 515 - E-mail: info@anolis.eu
 UK: Anolis UK, 3 Spinney View, Stone Circle Road, Round Spinney Ind Est, NN3 8RF, Northampton, United Kingdom. Tel: +44 1604 741000 - Fax: +44 1604 741041 - E-mail: info@anolis.co.uk
 USA: Anolis Lighting, 12349 SW 53rd Street, Suite 202, Cooper City, Florida 33330, U.S.A. Tel: +1 844 426 6547 - +1 844-4 ANOLIS - Fax: (954) 680-1910 - E-mail: info@anolislighting.com
 AUS: Anolis Australia, 28 Expo Court, Ashmore, 4215, Queensland, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E-mail: info@anolis.com.au
 AUS: Anolis Australia, 5 Phillip Court, Port Melbourne, 3207, Victoria, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E-mail: info@anolis.com.au
 Asia and Pacific: Anolis Asia and Pacific, 12 New Ind Road, #02-05 Morningstar Centre, S-536202, Singapore. Tel: +65 6280 8558 - Fax: +65 6280 2896 - E-mail: asiapacific@anolis.eu
 Middle East: Anolis Middle East, Office Nbr 507 5th Floor, Al Asmawi Building DIP 1, Dubai, UAE. Po Box: 391 898 - Tel: +971 4 885 3223 - E-mail: middleeast@anolis.eu
 Russia and CIS: Taganskaya str. 26-1-72, 109004 Moscow, Russia. Tel: +7 495 504 9569 - E-mail: russia@anolis.eu
 Central and South America: Galicia 1198 ap 303, 1100, Montevideo, Uruguay. Tel: +5982 900 67 47 - E-mail: Latam@anolis.eu

www.anolis.eu | www.anolislighting.com

Connection Scheme:

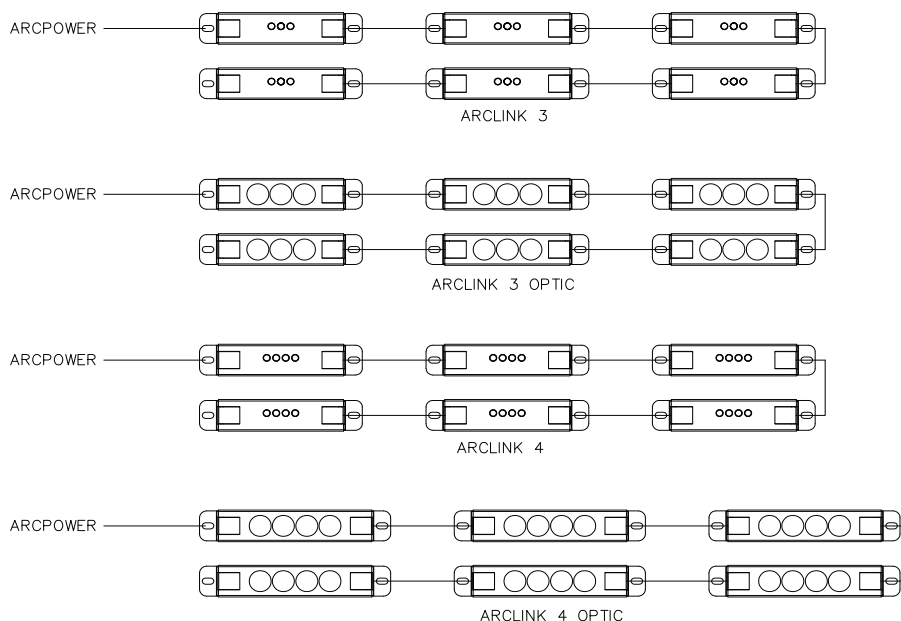

Supplied in a kit of 6

Total Length with standard patch cables - ArcLink 3, ArcLink 3 Optic and ArcLink 4 - 1140mm (44.89in)
ArcLink 4 Optic - 1230mm (48.43in)

Accessories:



Connector RJ45 /
Termination Plug
ArcLink 3 (Grey)



Connector RJ45 /
Termination Plug
ArcLink 4 (Black)



Patch Cable 10cm
Patch Cable 20CM
Patch Cable 30CM

Product Specification:

Electrical	Input Voltage		48V DC
	Power Consumption		3.4W - 4.5W
Optical	Light Source		3 - 4 x High Power LEDs
		RGBW	W = WW-3200K or CW-6500K
		RGB	
		PW	3200K, 4300K, 6500K
		SW	3200K-6500K
		R	
		G	
		B	
		A	
	LED Channel		Red / Green / Blue / White. Pure White, Smart White
	Beam Angle		10°, 22°, 30°, 34° 46° x 11°, Non Optic
	Projected Lumen Maintenance		50,000 hrs (L70@ 25°C / 77°F)
Control	Wireless DMX (Optional Accessory)		N/A
	Control System		Anolis Lighting Controls or any Third Party DMX512 Controllers
	Power Supply		ArcPower Range
	Stand Alone Control		N/A
Physical	Width x Height x Depth	Inches	ArcLink 3/4 - 5.55 x 0.79 x 1.14 ArcLink 3 Optic - 5.55 x 0.95 x 1.14 ArcLink 4 Optic - 6.50 x 0.95 x 1.34
		mm	ArcLink 3/4 - 141 x 20x 29 ArcLink 3 Optic - 141 x 24 x 29 ArcLink 4 Optic - 165 x 24 x 34
	Weight	lbs	0.11, 0.13
		kg	0.05, 0.06
	Housing		Aluminium
	Fixture Cable and Connections		ArcLink Patch Cable RJ45
	Fixing Method		Mounting Holes
	Adjustability		N/A
	IP Rating		IP2X
	IK Rating		N/A
	Cooling System		Convection
	Operating Ambient Temperature		-20°C / +40°C (-4°F / +104°F)
	Operating Temperature		+50°C @ Ambient +25°C (+122°F @ Ambient +77°F)
Certification	Listings		ETL / cETL, CE, RoHS

Subject to change without notice - please contact Anolis for clarification

Accessories	Description
	ArcLink Patch Cable x 5 (included) RJ45 Termination Plug x 1 (Included)





ROBE lighting s.r.o., Palackeho 416 757 01 Valasske Mezirici, Czech Republic. Tel: +420 571 751 500 - Fax: +420 571 751 515 - E-mail: info@anolis.eu
 UK: Anolis UK, 3 Spinney View, Stone Circle Road, Round Spinney Ind Est, NN3 8RF, Northampton, United Kingdom. Tel: +44 1604 741000 - Fax: +44 1604 741041 - E-mail: info@anolis.co.uk
 USA: Anolis Lighting, 12349 SW 53rd Street, Suite 202, Cooper City, Florida 33330, U.S.A. Tel: +1 844 426 6547 - +1-844-4 ANOLIS - Fax: (954) 680-1910 - E-mail: info@anolislighting.com
 AUS: Anolis Australia, 28 Expo Court, Ashmore, 4215, Queensland, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E-mail: info@anolis.com.au
 AUS: Anolis Australia, 5 Phillip Court, Port Melbourne, 3207, Victoria, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E-mail: info@anolis.com.au
 Asia and Pacific: Anolis Asia and Pacific, 12 New Ind Road, #02-05 Morningstar Centre, S-536202, Singapore. Tel: +65 6280 8558 - Fax: +65 6280 2896 - E-mail: asiapacific@anolis.eu
 Middle East: Anolis Middle East, Office Nbr 507 5th Floor, Al Asmawi Building DIP 1, Dubai, UAE. Po Box: 391 898 - Tel: +971 4 885 3223 - E-mail: middleeast@anolis.eu
 Russia and CIS: Taganskaya str. 26-1-72, 109004 Moscow, Russia. Tel: +7 495 504 9569 - E-mail: russia@anolis.eu
 Central and South America: Galicia 1198 ap 303, 1100, Montevideo, Uruguay. Tel: +5982 900 67 47 - E-mail: Latam@anolis.eu

www.anolis.eu | www.anolislighting.com



Photometric Data:

ArcLink 3 RGB - 10°

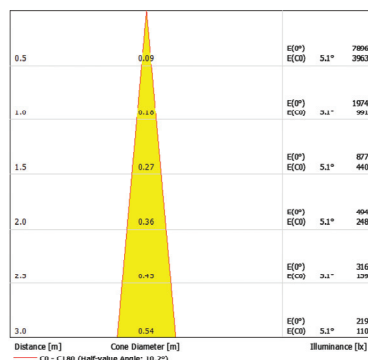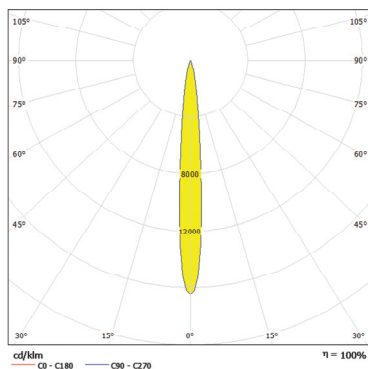

Total Luminous Flux: 140lm



arcLink 3 RGB - 22°

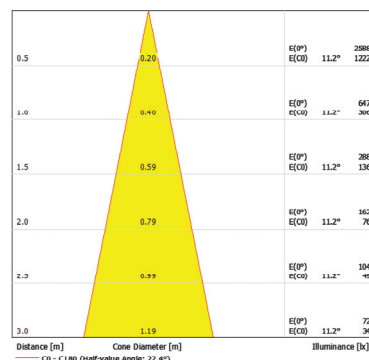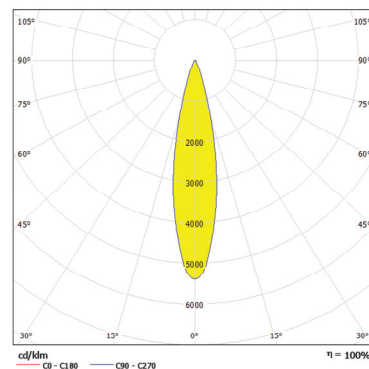

Total Luminous Flux: 140lm



For foot Candles divide lux by 10.7

ArcLink 3 RGB - 30°

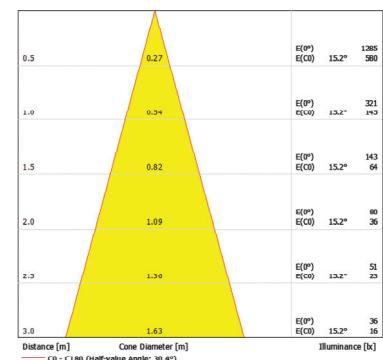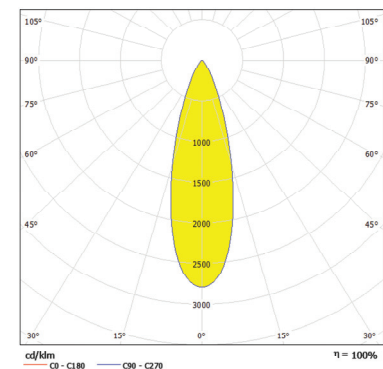



Total Luminous Flux: 135lm

ArcLink 3 RGB - 34°

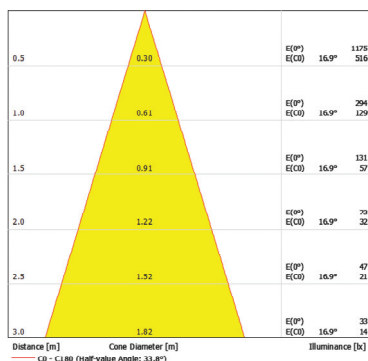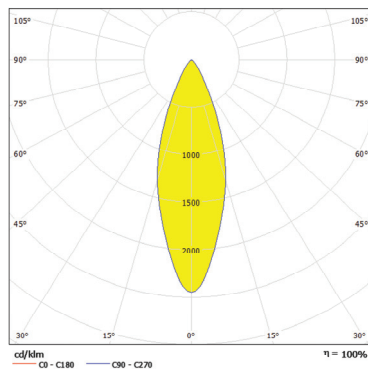



Total Luminous Flux: 135lm

ArcLink 3 RGB - 46°x11°

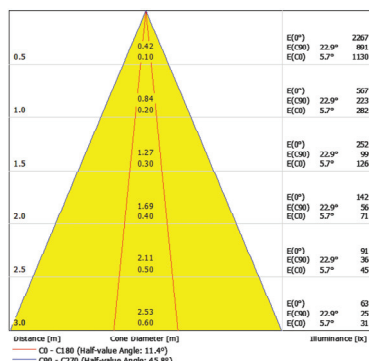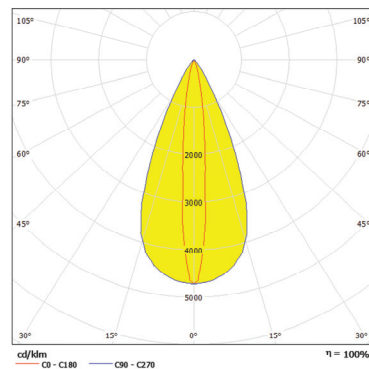

Total Luminous Flux: 138lm

ArcLink 3 RGB - Non Optic

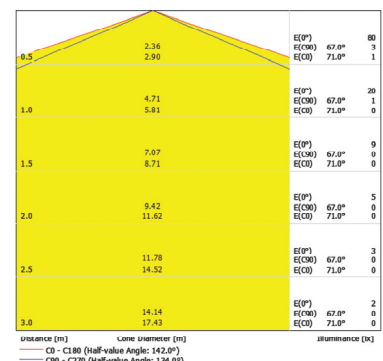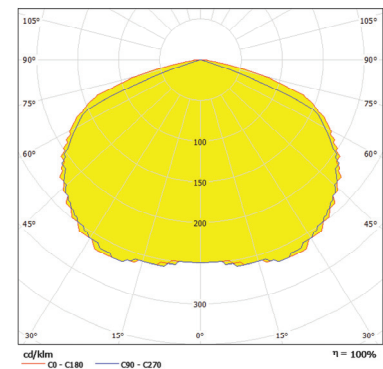



Total Luminous Flux: 90lm

ROBE lighting s.r.o. Palackého 416 757 01 Valasske Mezirici, Czech Republic. Tel: +420 571 751 500 - Fax: +420 571 751 515 - E-mail: info@anolis.eu
 UK: Anolis UK, 3 Spinney View, Stone Circle Road, Round Spinney Ind Est, NN3 8RF, Northampton, United Kingdom. Tel: +44 1604 741000 - Fax: +44 1604 741041 - E-mail: info@anolis.co.uk
 USA: Anolis Lighting, 12349 SW 53rd Street, Suite 202, Cooper City, Florida 33330, U.S.A. Tel: +1 844 426 6547 - +1-844-4 ANOLIS - Fax: (954) 680-1910 - E-mail: info@anolislighting.com
 AUS: Anolis Australia, 28 Expo Court, Ashmore, 4215, Queensland, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E-mail: info@anolis.com.au
 AUS: Anolis Australia, 5 Phillip Court, Port Melbourne, 3207, Victoria, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E-mail: info@anolis.com.au
 Asia and Pacific: Anolis Asia and Pacific, 12 New Ind Road, #02-05 Morningstar Centre, S-536202, Singapore. Tel: +65 6280 8558 - Fax: +65 6280 2896 - E-mail: asiapacific@anolis.eu
 Middle East: Anolis Middle East, Office Nbr 507 5th Floor, Al Asmawi Building DIP 1, Dubai, UAE. Po Box: 391 898 - Tel: +971 4 885 3223 - E-mail: middleeast@anolis.eu
 Russia and CIS: Taganskaya str. 26-1-72, 109004 Moscow, Russia. Tel: +7 495 504 9569 - E-mail: russia@anolis.eu
 Central and South America: Galicia 1198 ap 303, 1100, Montevideo, Uruguay. Tel: +5982 900 67 47 - E-mail: Latam@anolis.eu

www.anolis.eu | www.anolislighting.com



Photometric Data:

ArcLink 4 RGBWW - 10°

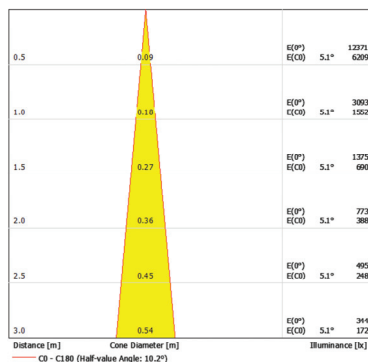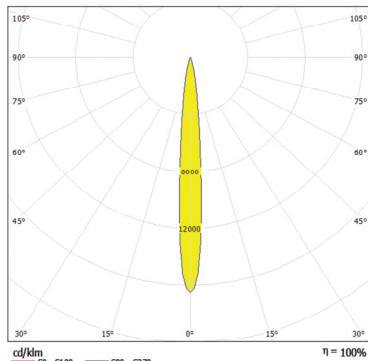



Total Luminous Flux: 188lm

ArcLink 4 RGBWW - 34°

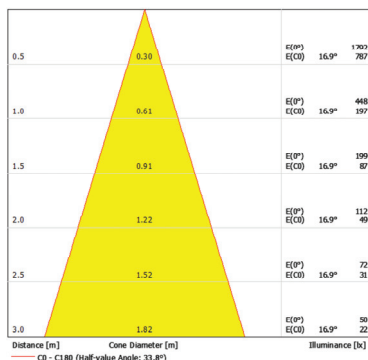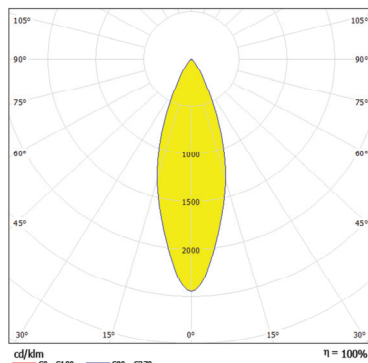



Total Luminous Flux: 183lm

ArcLink 4 RGBWW - 22°

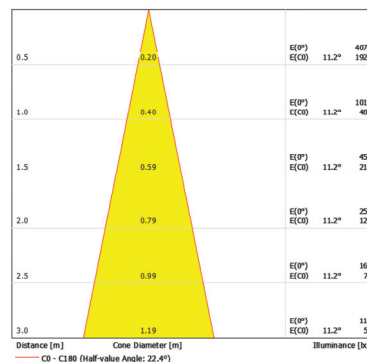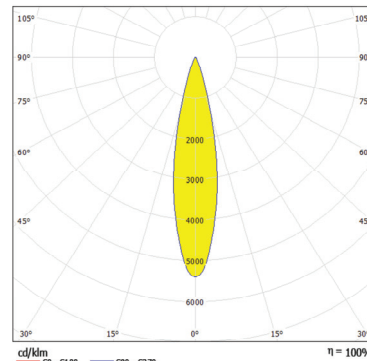

Total Luminous Flux: 189lm



ArcLink 4 RGBWW - 46°x11°

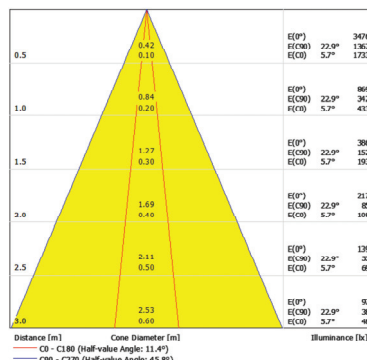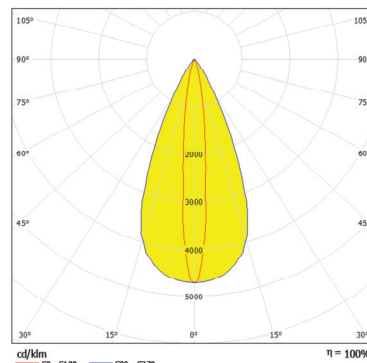

Total Luminous Flux: 184lm



For foot Candles divide lux by 10.7

ArcLink 4 RGBWW - 30°

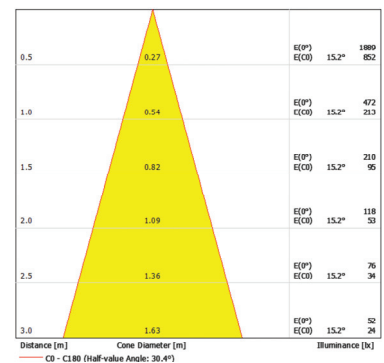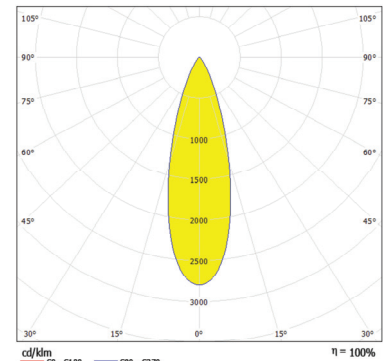

Total Luminous Flux: 169lm

ArcLink 4 RGBWW - Non Optic

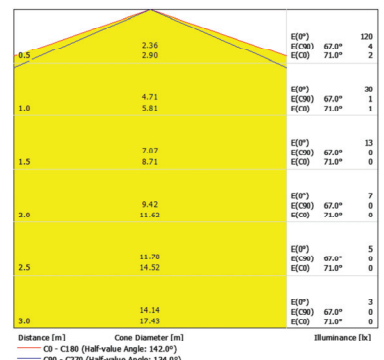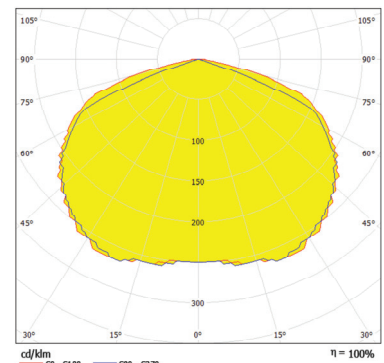

Total Luminous Flux: 120lm

ROBE lighting s.r.o. Palackeho 416 757 01 Valasske Mezirici, Czech Republic. Tel: +420 571 751 500 - Fax: +420 571 751 515 - E-mail: info@anolis.eu
UK: Anolis UK, 3 Spinney View, Stone Circle Road, Round Spinney Ind Est, NN3 8RF, Northampton, United Kingdom. Tel: +44 1604 741000 - Fax: +44 1604 741041 - E-mail: info@anolis.co.uk
USA: Anolis Lighting, 12349 SW 53rd Street, Suite 202, Cooper City, Florida 33330, U.S.A. Tel: +1 844 426 6547 - +1-844-4 ANOLIS - Fax: (954) 680-1910 - E-mail: info@anolislighting.com
AUS: Anolis Australia, 28 Expo Court, Ashmore, 4215, Queensland, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E-mail: info@anolis.com.au
Asia and Pacific: Anolis Asia and Pacific, 12 New Ind Road, #02-05 Morningstar Centre, S-536202, Singapore. Tel: +65 6280 8558 - Fax: +65 6280 2896 - E-mail: asiapacific@anolis.eu
Middle East: Anolis Middle East, Office Nbr 507 5th Floor, Al Asmawi Building DIP 1, Dubai, UAE. Po Box: 391 898 - Tel: +971 4 885 3223 - E-mail: middleeast@anolis.eu
Russia and CIS: Taganskaya str. 26-1-72, 109004 Moscow, Russia. Tel: +7 495 504 9569 - E-mail: russia@anolis.eu
Central and South America: Galicia 1198 ap 303, 1100, Montevideo, Uruguay. Tel: +5982 900 67 47 - E-mail: Latam@anolis.eu

www.anolis.eu | www.anolislighting.com