

ArcCove Power and Data Box[™]



Client: _____

Project: _____



Specifier: _____

Type: _____ Qty: _____



FEATURES:

- Input Voltage: 100-240V AC 50-60Hz
- Power consumption: 96W
- Max Load:
 - 17 x ArcCove on Standard Power
 - 8 x ArcCove on High Power
- Control: DMX 512
- Housing: Moulded Plastic
- Max Cable Length: 100m Max Depending on Number of ArcCoves
- Fixing Method: 2 Fixing Holes
- IP Rating: IP2X
- Operating Ambient Temp: +40°C [+104°F]
- Certification: ETL / cETL, CE, RoHS
- 5 Year Warranty

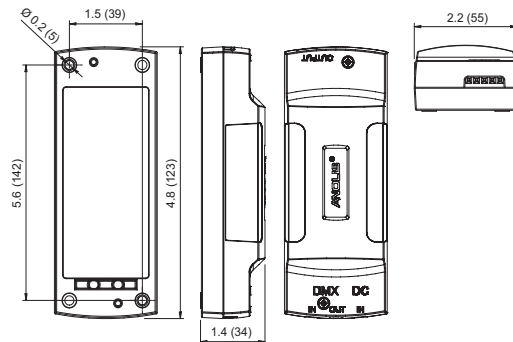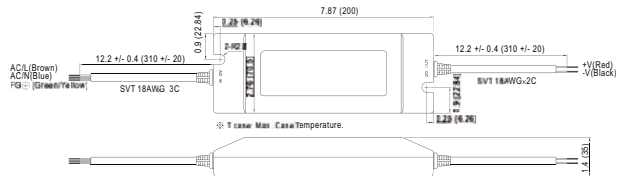

How To Order	GROUP	VARIANT	SIZE	COLOUR	OPTIC	FINISH	OPTIONS
ARC	1	2	3	4	5	6	7
	COV	POW	10	RGB		S - Silver	
		DAT				B - Black	
		PAD				W - White	
						C - Custom	
Example	ARCCOVE POWER AND DATA						
ARC	COV	PAD	10	RGB		S	

ROBE lighting s.r.o, Palackeho 416 757 01 Valasske Mezirici, Czech Republic. Tel: +420 571 751 500 - Fax: +420 571 751 515 - E-mail: info@anolis.eu
 UK: Anolis UK, 3 Spinney View, Stone Circle Road, Round Spinney Ind Est, NN3 8RF, Northampton, United Kingdom. Tel: +44 1604 741000 - Fax: +44 1604 741041 - E-mail: info@anolis.co.uk
 USA: Anolis Lighting, 12349 SW 53rd Street, Suite 202, Cooper City, Florida 33330, U.S.A. Tel: +1 844 426 6547 - +1-844-4 ANOLIS - Fax: (954) 680-1910 - E-mail: info@anolislighting.com
 AUS: Anolis Australia, 28 Expo Court, Ashmore, 4215, Queensland, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E-mail: info@anolis.com.au
 AUS: Anolis Australia, 5 Phillip Court, Port Melbourne, 3207, Victoria, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E-mail: info@anolis.com.au
 Asia and Pacific: Anolis Asia and Pacific, 12 New Ind Road, #02-05 Morningstar Centre, S-536202, Singapore. Tel: +65 6280 8558 - Fax: +65 6280 2896 - E-mail: asiapacific@anolis.eu
 Middle East: Anolis Middle East, Office Nbr 507 5th Floor, Al Asmawi Building DIP 1, Dubai, UAE. Po Box: 391 898 - Tel: +971 4 885 3223 - E-mail: middleeast@anolis.eu
 Russia and CIS: Taganskaya str. 26-1-72, 109004 Moscow, Russia. Tel: +7 495 504 9569 - E-mail: russia@anolis.eu
 Central and South America: Galicia 1198 ap 303, 1100, Montevideo, Uruguay. Tel: +5982 900 67 47 - E-mail: Latam@anolis.eu

www.anolis.eu | www.anolislighting.com

Product Specification:

Electrical	Input Voltage	100-240V AC 50/60 Hz		
	Power Consumption	96W		
	OutPut Voltage	24V DC		
	Rated Current	4A		
	Power Factor	>95		
	Protection	Short Circuit, Overload, Over Voltage, Over Temperature		
Physical	Width x Height x Depth (ArcCover Power)	Inches	7.9 x 2.8 x 1.4	
		mm	200 x 70.5 x 35	
	Weight	lbs	1.15	
		kg	0.52	
	Number of Led Output Zones	1		
	Maximum Load Per Zone	RGBW	17 x ArcCover Standard Power	
			8 x ArcCover High Power	
	Max Cable Length	100m Depending on number of ArcCoves		
		20m From ArcCover Power to first ArcCove		
		20m between ArcCoves		
	Input connection	3-wire cable 18AWG 3C, Length 310mm		
	LED Output Connection	2-wire cable 18AWG 2C, Length 310mm		
	Fixing Method	2 Fixing Holes		
IP Rating	IP20			
Cooling System	Convection			
Operating Ambient Temperature	-30°C / +50°C (-22°F / +122°F)			
Certification	Listings	ETL / cETL, CE, RoHS		

ArcCove Data Box			
Control			4-Digit LED display, 4 buttons
	Connection		DMX and Power Connection Blocl
Width x Height x Depth (ArcCover Power)	Inches	5.6 x 2.17 x 1.38	
	mm	142 x 55 x 35	
Weight	lbs	0.33	
	kg	0.15	
IP Rating	IP20		

Subject to change without notice - please contact Anolis for clarification

Accessories	Description
	Cable connecting ArcCove 1m
	Cable connecting ArcCove 2m
	Cable connecting ArcCove 5m
	Cable connecting ArcCove 10m
	Cable Patch ArcCove 10cm
	Cable Patch ArcCove 15cm
	Cable Patch ArcCove 9.5cm, 90°
	Cable Patch ArcCove 12cm, 90°
	Cable Patch ArcCove 15cm, 90°
	Cable Patch ArcCove 30cm, 90°
	Mounting Rail ArcCove 1.2m
	Mounting Rail ArcCove 2.4m

Other lengths available on request



ROBE lighting s.r.o, Palackeho 416 757 01 Valasske Mezirici, Czech Republic. Tel: +420 571 751 500 - Fax: +420 571 751 515 - E.mail: info@anolis.eu
 UK: Anolis UK, 3 Spinney View, Stone Circle Road, Round Spinney Ind Est, NN3 8RF, Northampton, United Kingdom. Tel: +44 1604 741000 - Fax: +44 1604 741041 - E.mail: info@anolis.co.uk
 USA: Anolis Lighting, 12349 SW 53rd Street, Suite 202, Cooper City, Florida 33330, U.S.A. Tel: +1 844 426 6547 - +1-844-4 ANOLIS - Fax: [954] 680-1910 - E.mail: info@anolislighting.com
 AUS: Anolis Australia, 28 Expo Court, Ashmore, 4215, Queensland, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E.mail: info@anolis.com.au
 AUS: Anolis Australia, 5 Phillip Court, Port Melbourne, 3207, Victoria, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E.mail: info@anolis.com.au
 Asia and Pacific: Anolis Asia and Pacific, 12 New Ind Road, #02-05 Morningstar Centre, S-536202, Singapore. Tel: +65 6280 8558 - Fax: +65 6280 2896 - E.mail: asiapacific@anolis.eu
 Middle East: Anolis Middle East, Office Nbr 507 5th Floor, Al Asmawi Building DIP 1, Dubai, UAE. Po Box: 391 898 - Tel: +971 4 885 3223 - E.mail: middleeast@anolis.eu
 Russia and CIS: Taganskaya str. 26-1-72, 109004 Moscow, Russia. Tel: +7 495 504 9569 - E.mail: russia@anolis.eu
 Central and South America: Galicia 1198 ap 303, 1100, Montevideo, Uruguay. Tel: +5982 900 67 47 - E.mail: Latam@anolis.eu

www.anolis.eu | www.anolislighting.com