

# ArcPower 360 <sup>tm</sup>



Client: \_\_\_\_\_

Project: \_\_\_\_\_


Specifier: \_\_\_\_\_

Type: \_\_\_\_\_ Qty: \_\_\_\_\_



**FEATURES:**

- Input Voltage: 100-240V AC 50-60Hz
- Power consumption: 600W
- Max Load Per Zone:
  - 36 x 1W LED's (RGB)
  - 42 x 1W LED's (RGBW)
  - 10 LED's RGBW (MC)
- Control: DMX 512, USITT
- Housing: Steel Plate
- Max Cable Length: 80m
- Fixing Method: 6 x Fixing holes
- IP Rating: IP2X
- Operating Ambient Temp: +40°C (+104°F)
- Certification: [ETL / cETL Not Smart White], CE, RoHS
- 5 Year Warranty

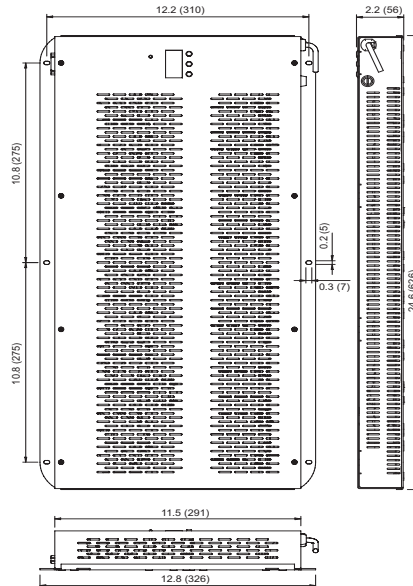

How To Order							
	GROUP	VARIANT	SIZE	COLOUR	OPTIC	FINISH	OPTIONS
ARC	1	2	3	4	5	6	7
	POW	IND	360	RGBW - Red, Green, Blue, White SW - Smart White		S - Silver B - Black W - White C - Custom	DMX - DMX DLI - Dali ART -Artnet
Example	ARCPower 360 CUSTOM ARTNET						
ARC	POW	IND	360	RGBW		C	ART

ROBE lighting s.r.o., Palackeho 416 757 01 Valasske Mezirici, Czech Republic. Tel: +420 571 751 500 - Fax: +420 571 751 515 - E-mail: info@anolis.eu  
 UK: Anolis UK, 3 Spinney View, Stone Circle Road, Round Spinney Ind Est, NN3 8RF, Northampton, United Kingdom. Tel: +44 1604 741000 - Fax: +44 1604 741041 - E-mail: info@anolis.co.uk  
 USA: Anolis Lighting, 12349 SW 53rd Street, Suite 202, Cooper City, Florida 33330, U.S.A. Tel: +1 844 426 6547 - +1-844-4 ANOLIS - Fax: (954) 680-1910 - E-mail: info@anolislighting.com  
 AUS: Anolis Australia, 28 Expo Court, Ashmore, 4215, Queensland, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E-mail: info@anolis.com.au  
 AUS: Anolis Australia, 5 Phillip Court, Port Melbourne, 3207, Victoria, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E-mail: info@anolis.com.au  
 Asia and Pacific: Anolis Asia and Pacific, 12 New Ind Road, #02-05 Morningstar Centre, S-536202, Singapore. Tel: +65 6280 8558 - Fax: +65 6280 2896 - E-mail: asiapacific@anolis.eu  
 Middle East: Anolis Middle East, Office Nbr 507 5th Floor, Al Asmawi Building DIP 1, Dubai, UAE. Po Box: 391 898 - Tel: +971 4 885 3223 - E-mail: middleeast@anolis.eu  
 Russia and CIS: Taganskaya str. 26-1-72, 109004 Moscow, Russia. Tel: +7 495 504 9569 - E-mail: russia@anolis.eu  
 Central and South America: Galicia 1198 ap 303, 1100, Montevideo, Uruguay. Tel: +5982 900 67 47 - E-mail: Latam@anolis.eu

[www.anolis.eu](http://www.anolis.eu) | [www.anolislighting.com](http://www.anolislighting.com)

## Product Specification:

Electrical	Input Voltage		100-240V AC 50/60 Hz
	Power Consumption		600W +/-10%
	Max Output Current		350mA Per Colour
Control	Interface Protocol		USITT, DMX512, DyNet, RS232
	Operation Modes		DMX, Master/ Slave, Stand-Alone
	Display		3 Digit LED
Physical	Width x Height x Depth	Inches	12.9 x 2.17 x 24.65
		mm	326 x 55 x 626
	Weight	lbs	13.9
		kg	6.3
	Number of Led Output Zones		10
	Maximum Load Per Zone	RGB	36 x 1W LED's (Smart White 36 x 1W LED's)
		RGBW	42 x 1W LED's
		RGBW (MC)	10 x MC LED's (Smart White 10 x MC LED's)
	Total Load	RGB	360 x 1W LED's (Smart White 360 x 1W LED's)
		RGBW	420 x 1W LED's
		RGBW (MC)	100 x MC LED's (Smart White 100 x MC LED's)
	DMX Channels		30, 40, 43, 4, 5, 1, 5 (Smart White 20, 1, 11, 22)
	DMX Modes		6 (Smart White 4)
	Built in Programs		2 (Smart White 3)
	Editable Programs		3 (Upto 30 Steps Each) (Smart White 1 Upto 30 Steps)
	Max Cable Length		80m Max Per Zone
	LED Output Connection		RJ45
	DMX Connection		RJ45
	RS232 Connection		DE-9 (Male)
	Fixing Method		6 Mounting Holes
IP Rating		IP2X	
IK Rating		N/A	
Cooling System		Convection	
Operating Temperature Range		-10°C / +40°C (14°F / +104°F)	
Certification	Listings		ETL / cETL (Not Smart White), CE, RoHS

Subject to change without notice - please contact Anolis for clarification

Accessories	Description
	Cable Joiner (included)
	RJ45 / DMX 3 Pin Adaptor (Included)
	RJ45 / DMX 5 Pin Adaptor (Included)



ROBE lighting s.r.o., Palackeho 416 757 01 Valasske Mezirici, Czech Republic. Tel: +420 571 751 500 - Fax: +420 571 751 515 - E-mail: info@anolis.eu  
 UK: Anolis UK, 3 Spinney View, Stone Circle Road, Round Spinney Ind Est, NN3 8RF, Northampton, United Kingdom. Tel: +44 1604 741000 - Fax: +44 1604 741041 - E-mail: info@anolis.co.uk  
 USA: Anolis Lighting, 12349 SW 53rd Street, Suite 202, Cooper City, Florida 33330, U.S.A. Tel: +1 844 426 6547 - +1-844-4 ANOLIS - Fax: (954) 680-1910 - E-mail: info@anolislighting.com  
 AUS: Anolis Australia, 28 Expo Court, Ashmore, 4215, Queensland, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E-mail: info@anolis.com.au  
 AUS: Anolis Australia, 5 Phillip Court, Port Melbourne, 3207, Victoria, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E-mail: info@anolis.com.au  
 Asia and Pacific: Anolis Asia and Pacific, 12 New Ind Road, #02-05 Morningstar Centre, S-536202, Singapore. Tel: +65 6280 8558 - Fax: +65 6280 2896 - E-mail: asiapacific@anolis.eu  
 Middle East: Anolis Middle East, Office Nbr 507 5th Floor, Al Asmawi Building DIP 1, Dubai, UAE. Po Box: 391 898 - Tel: +971 4 885 3223 - E-mail: middleeast@anolis.eu  
 Russia and CIS: Taganskaya str. 26-1-72, 109004 Moscow, Russia. Tel: +7 495 504 9569 - E-mail: russia@anolis.eu  
 Central and South America: Galicia 1198 ap 303, 1100, Montevideo, Uruguay. Tel: +5982 900 67 47 - E-mail: Latam@anolis.eu

[www.anolis.eu](http://www.anolis.eu) | [www.anolislighting.com](http://www.anolislighting.com)