

CALUMMA™ XS MC

Using a single high-power, multi-chip LED inside a compact, elegant, and durable housing, the smallest Calumma is a great choice for many different lighting applications. Complementing both outdoor environments and interior designs, its wide range of beam angles, LED chip colour variant options and accessories make the Calumma XS MC an ideal, extra small lighting solution for any architectural design.



KEY FEATURES

Lumen output & Light source

Luminaire with one high-power, multi-chip LED provides light output up to 331 lumens with an efficacy of 33 lm/w. Offering a choice of multiple LED colour variants, precise beam control with no light spill, and perfectly homogenised light output, it's an excellent solution for applications requiring high performance in a compact luminaire.

Design & Durability

Lightweight, compact, durable and stylish housing made of high-pressure die cast aluminium. IP67 and IK10 certification; suitable for marine applications (Harsh Environment Finish required) and traffic applications. Supported with a 5 year warranty.

Flexibility

An exceptionally compact luminaire available with a wide range of accessories, custom colour finishes, LED choices, and beam angle options, Calumma XS offers the lighting designer a flexible solution for the most demanding applications.


COLOURS

* UPON REQUEST



COLOUR TEMPERATURE


* UPON REQUEST




CONTROL & PROTOCOLS



STANDARD & SPECIFICATION

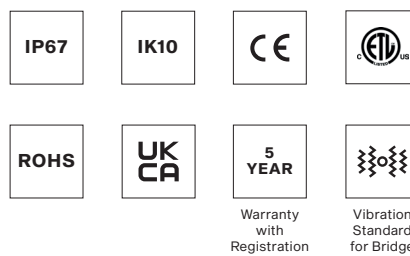


FINISH OPTIONS

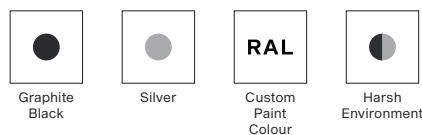


OPTIC OPTIONS

SYMMETRICAL

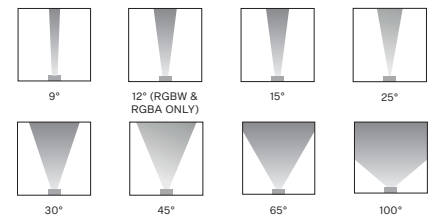


BI-SYMMETRICAL

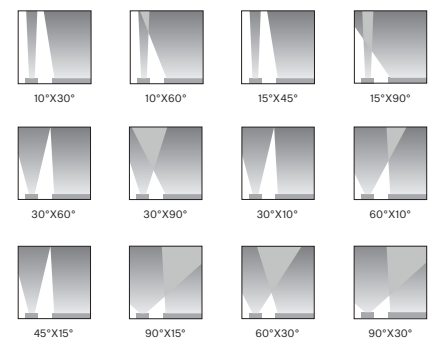

CALUMMA XS MC SPECIFICATION

ELECTRICAL	Typical Power Consumption	10 W
	Input Voltage	48 V
OPTICAL	Light Source	High Power Multichip LED
	Colour Variants	RGBW (W - 6500 K) RGBA PW (W - 3000 K)
		Other Variants On Request (TW 3000 - 6500 K)
	Beam Angle	9° 12° (RGBW & RGBA only) 15° 25° 30° 45° 65° 100°
		10°x30° 30°x10° 10°x60° 60°x10° 15°x45° 45°x15° 15°x90° 90°x15° 30°x60° 60°x30° 30°x90° 90°x30°
	Lumen Output Delivered	331 lm (@9°RGBW)
Projected Lumen Maintenance	L90B10 >90.000 hrs, Ta = 25°C / 77°F	
CONTROL	Interface protocol	Via E-box Remote or E-box Remote Basic
	E-Box Remote control protocol	USITT DMX512/RDM, ArtNet, MA Net, MA Net2, sACN, Kling-Net
	Setting / addressing	E-box Remote, RDM communicator
	Connectivity & Power Supply	E-Box Remote Remote Basic
PHYSICAL	Width x Height x Depth	94 x 108 x 76 mm (3.7 x 4.2 x 2.99 in.)
	Weight	0.59 kg 1.3 lbs
	Housing	High Pressure Die-Cast Aluminium Body Tempered Glass
	Finish Options	Standard Colour - Graphite Black (RAL 9011) Silver (RAL 9006)
		Cost Option - Custom RAL Harsh Environment (RAL 9016, RAL 9011)
	Cabels / Connectivity	IN - 1 m cable with bare end - Other cable length - custom - Junction box - optional
	Mounting Method	Yoke or Yoke for Pole Adaptor
	Adjustability	+180° / -180°
	Protection Factor	IP67 (IP66 Junction Box) / Suitable For Wet Locations
	IK Rating	IK10
	Cooling System	Convection
	Operating Ambient Temperature	-20 °C / +50 °C (-4 °F / +122 °F)
CERTIFICATION	Listings	ETL / cETL, CE, RoHS, UKCA
ACCESSORIES		Optical Demo Set for Calumma XS (for demo purposes)
		Outdoor Foil Holder for Calumma XS (for permanent installation)
		Optical Foil Set for Outdoor Foil Holder Calumma XS
		Land Spike for Calumma XS
		Top Hat Calumma XS
		Half Top Hat Calumma XS
		Tenon Adaptor for Calumma XS
		Twin Wall Cover Calumma XS
	Pole Adaptor (ø 102mm) (Yoke for Pole Adaptor Required)	


DIMENSIONS

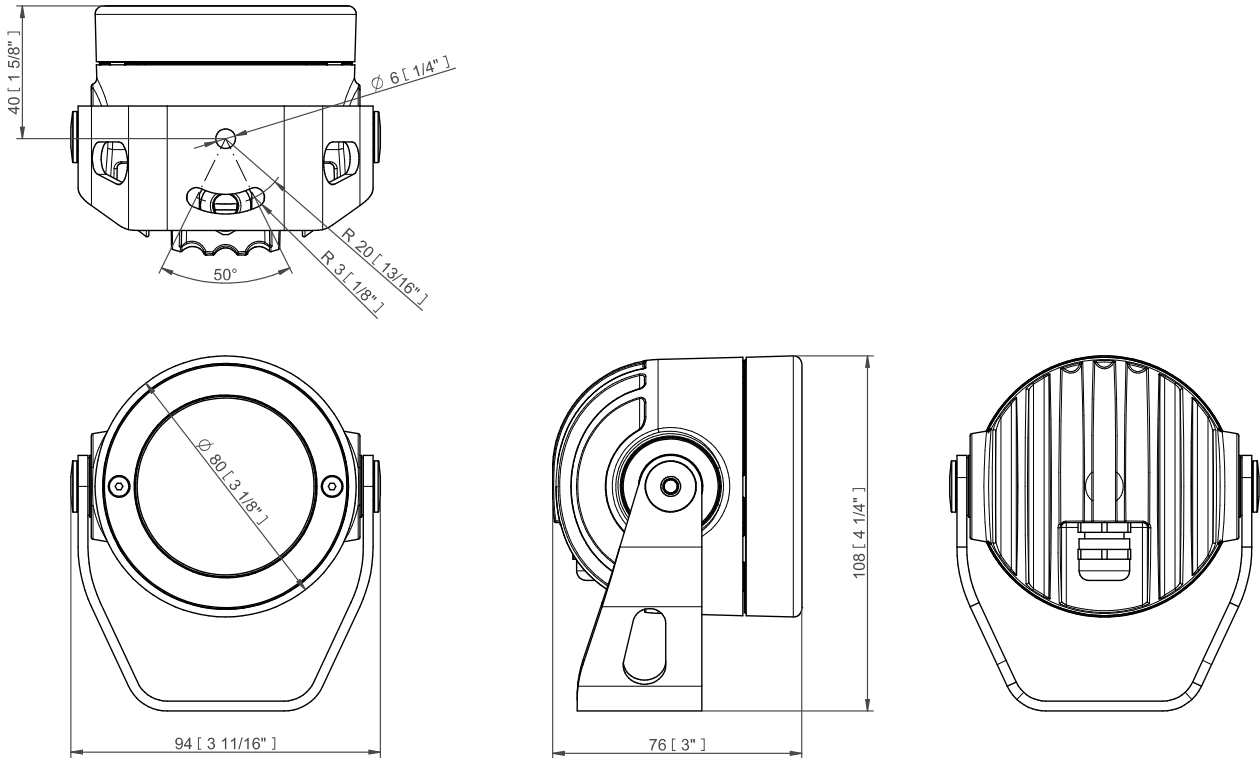

CONTROL AND CONNECTION OPTIONS


Via E-Box REMOTE (Calumma XS, Eminere Remote)

- 1) SJTW 5x 14AWG (1305 3336), black or On request Cable SJTW 5x 14AWG (13053697), white
- 2) Junction Box for Calumma XS, (4x Output)
- 3) UL 20969 5x 20AWG (13053481), black or On request Cable SJTW 5x 20AWG (13053696), white
- 4) Junction Box for Calumma XS, (1x Output)

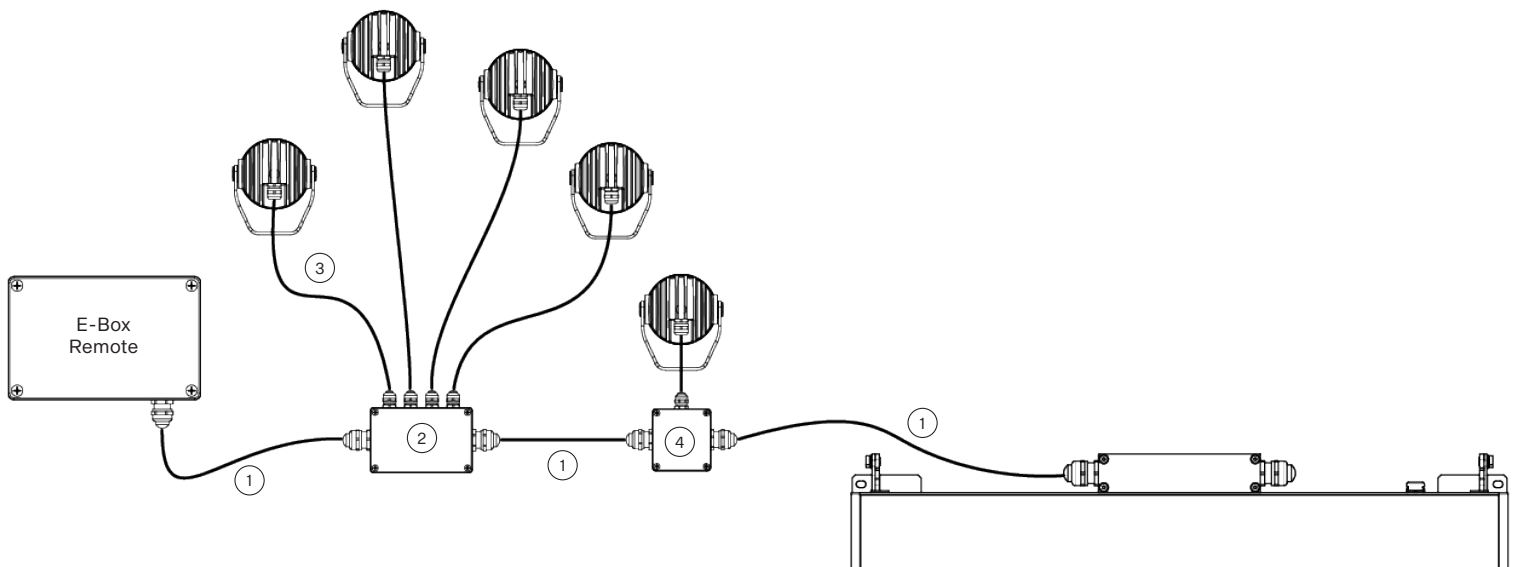


BI-SYMMETRICAL BEAM ANGLES

Bi-symmetrical:
10°x30°,
10°x60°,
15°x45°,
15°x90°,
30°x60°,
30°x90°

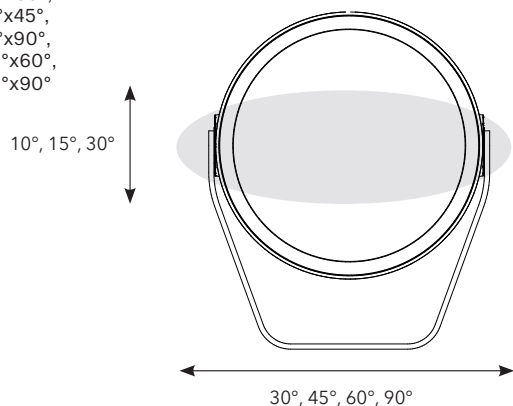

Bi-symmetrical:
30°x10°,
60°x10°,
45°x15°,
90°x15°,
60°x30°,
90°x30°

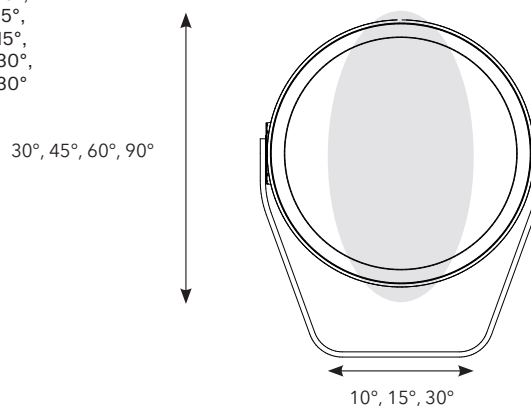

PHOTOMETRIC OVERVIEW

Lumen Output (lm)

	RGBCW (W 6500 K)	RGBA	WW (W 3000 K)
9°	331	284	282
12°	331	284	-
15°	256	220	218
25°	254	218	217
30°	250	214	213
45°	254	218	217
65°	254	218	217
100°	251	215	214
10° x 30°, 30° x 10°	240	206	205
10° x 60°, 60° x 10°	267	229	228
15° x 45°, 45° x 15°	272	233	232
30° x 60°, 60° x 30°	252	216	215
30° x 90°, 90° x 30°	272	233	232
15° x 90°, 90° x 15°	301	258	257

PROJECTED AREA

	Front (rear) - m ²	Front (rear) ft ²	Side - m ²	Side - ft ²	Top - m ²	Top - ft ²
Calumma XS	0,006	0,065	0,007	0,070	0,006	0,065
with Top Hat	0,006	0,065	0,014	0,151	0,014	0,151
with Half Top Hat	0,006	0,065	0,008	0,082	0,014	0,151


CONNECTIVITY

Following table shows maximum connected Calummas XS SC in a row with respect of cable length.


Cable length	Per E-Box Remote	Per 1 LED output
50 m (max per 1 output)	40 pcs	20 pcs
100 m (total length, 2x output)		20 pcs

ACCESSORIES

Top Hat

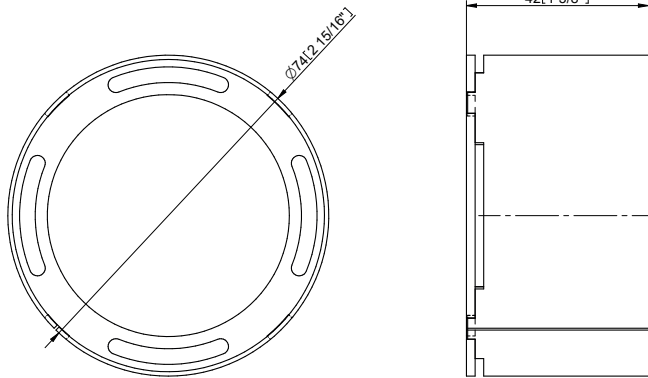


Half Top Hat

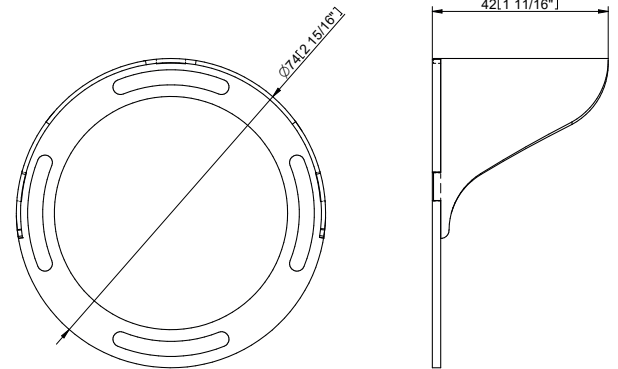


Pole Adaptor (ø 102mm, Yoke for pole Adaptor Required / PA)

Example of ordering code: Calumma XS MC RGBCW 15° PA

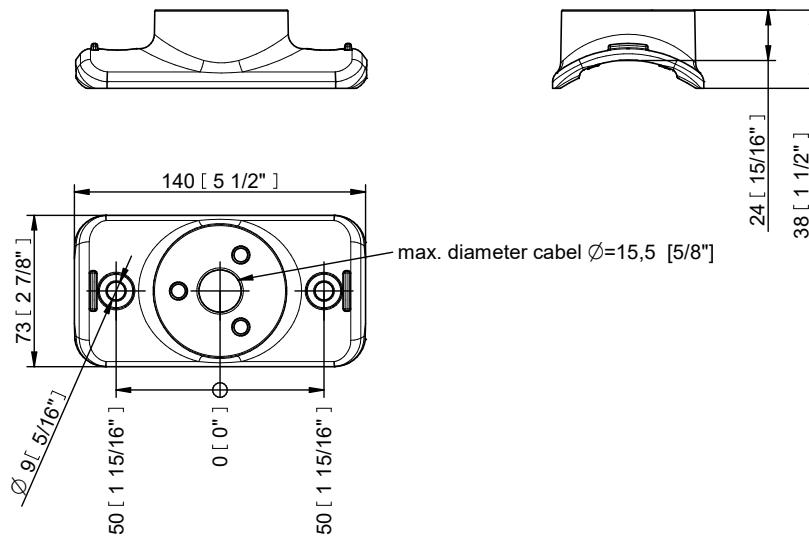


PHOTOMETRIC DATA


Calumma XS MC RGBW 6500K 10dg








Calumma XS MC RGBW 6500K 12dg




Calumma XS MC RGBW 6500K 15dg




Calumma XS MC RGBW 6500K 25dg

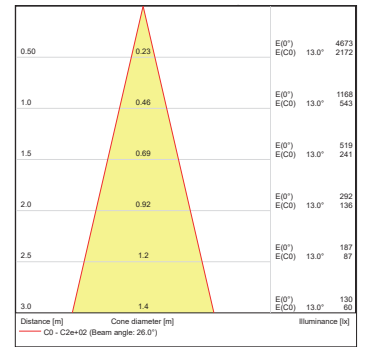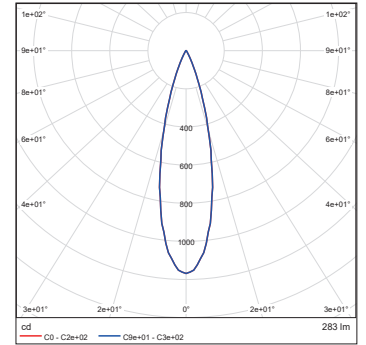


Calumma XS MC RGBW 6500K 30dg








Calumma XS MC RGBW 6500K 45dg



Calumma XS MC RGBW 6500K 65dg




Calumma XS MC RGBW 6500K 100dg

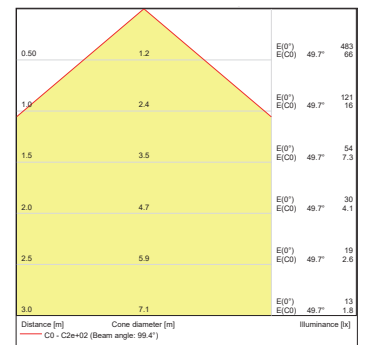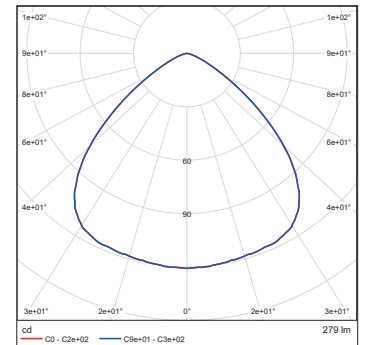


PHOTOMETRIC DATA


Calumma XS MC RGBW 6500K
10x30dg








Calumma XS MC RGBW 6500K
10x60dg




Calumma XS MC RGBW 6500K
15x45dg



Calumma XS MC RGBW 6500K
15x90dg

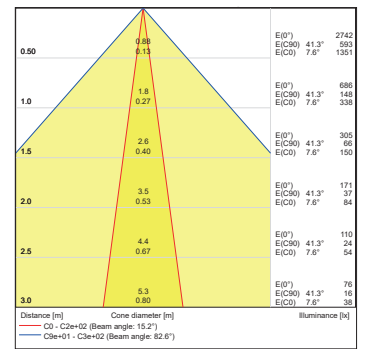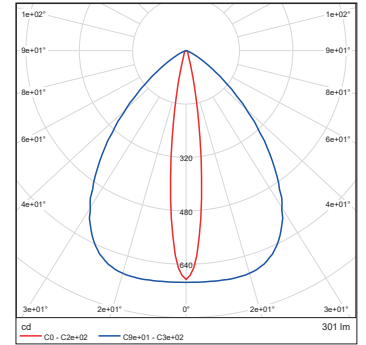

Calumma XS MC RGBW 6500K
30x60dg



Calumma XS MC RGBW 6500K
30x90dg

